Product datasheet

Specification





variable speed drive - ATV930 - 15kW - 200/240V- with braking unit - IP21

ATV930D15M3

Main

Range Of Product	Altivar Process ATV900
Device Application	Industrial application
Product Or Component Type	Variable speed drive
Product Destination	Synchronous motors Asynchronous motors
Product Specific Application	Process for industrial
Variant	Standard version With braking chopper
Network Number Of Phases	3 phases
Mounting Mode	Wall mount
Communication Port Protocol	EtherNet/IP Modbus serial Modbus TCP
[Us] Rated Supply Voltage	200240 V - 1510 %
Motor Power Kw	15.0 kW for normal duty 11.0 kW for heavy duty
Continuous Output Current	63.4 A at 4 kHz for normal duty 46.8 A at 4 kHz for heavy duty
Emc Filter	Integrated With EMC plate option
Ip Degree Of Protection	IP21
Degree Of Protection	UL type 1
Option Module	Slot A: communication module for Profibus DP V1 Slot A: communication module for PROFINET Slot A: communication module for DeviceNet Slot A: communication module for EtherCAT Slot A: communication module for CANopen daisy chain RJ45 Slot A: communication module for CANopen SUB-D 9 Slot A: communication module for CANopen screw terminals Slot A/slot B/slot C: digital and analog I/O extension module Slot A/slot B/slot C: output relay extension module Slot B: 5/12 V digital encoder interface module Slot B: analog encoder interface module Slot B: resolver encoder interface module communication module for Ethernet Powerlink
Discrete Input Logic	16 preset speeds
Asynchronous Motor Control Profile	Variable torque standard Optimized torque mode Constant torque standard
Synchronous Motor Control Profile	Permanent magnet motor Synchronous reluctance motor
Maximum Output Frequency	599 Hz

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Switching Frequency	216 kHz adjustable 416 kHz with derating factor
Nominal Switching Frequency	4 kHz
Line Current	52.6 A at 200 V (normal duty)
	40.1 A at 200 V (heavy duty)
	45.5 A at 240 V (normal duty)
	34.3 A at 240 V (heavy duty)
Apparent Power	18.9 kVA at 240 V (normal duty)
	14.3 kVA at 240 V (heavy duty)
Maximum Transient Current	76.1 A during 60 s (normal duty)
	70.2 A during 60 s (heavy duty)
Network Frequency	5060 Hz
Prospective Line Isc	50 kA

Complementary

Complemental y		
Discrete Input Number	10	
Discrete Input Type	DI1DI8 programmable, 24 V DC (<= 30 V), impedance: 3.5 kOhm DI7, DI8 programmable as pulse input: 030 kHz, 24 V DC (<= 30 V) STOA, STOB safe torque off, 24 V DC (<= 30 V), impedance: > 2.2 kOhm	
Discrete Output Number	2	
Discrete Output Type	Logic output DQ+ 01 kHz <= 30 V DC 100 mA Programmable as pulse output DQ+ 030 kHz <= 30 V DC 20 mA Logic output DQ- 01 kHz <= 30 V DC 100 mA	
Analogue Input Number	3	
Analogue Input Type	Al1, Al2, Al3 software-configurable voltage: 010 V DC, impedance: 30 kOhm, resolution 12 bits Al1, Al2, Al3 software-configurable current: 020 mA/420 mA, impedance: 250 Ohm, resolution 12 bits	
Analogue Output Number	2	
Analogue Output Type	Software-configurable voltage AQ1, AQ2: 010 V DC impedance 470 Ohm, resolution 10 bits Software-configurable current AQ1, AQ2: 020 mA impedance 500 Ohm, resolution 10 bits	
Relay Output Number	3	
Relay Output Type	Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles Configurable relay logic R2: sequence relay NO electrical durability 1000000 cycles Configurable relay logic R3: sequence relay NO electrical durability 1000000 cycles	
Maximum Switching Current	Relay output R1 on resistive load, cos phi = 1: 3 A at 250 V AC Relay output R1 on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC Relay output R2, R3 on resistive load, cos phi = 1: 5 A at 250 V AC Relay output R2, R3 on resistive load, cos phi = 1: 5 A at 250 V AC Relay output R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC	
Minimum Switching Current	Relay output R1, R2, R3: 5 mA at 24 V DC	
Physical Interface	Ethernet 2-wire RS 485	
Connector Type	2 RJ45 1 RJ45	
Method Of Access	Slave Modbus TCP	
Transmission Rate	10, 100 Mbits 4.8 kbps 9600 bit/s 19200 bit/s	

Number Of Addresses 1247 Data Format 8 bits, configurable odd, even or no parity Type Of Polarization No impedance 1 True Acceleration And Deceleration Ramps Motor Silp Compensation Automatic whatever the load Can be suppressed Aguistable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Output Voltage Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance Base Load Current At High Ade 8. A Overload Base Load Current At High Ade 8. A Overload Base Load Current At Low Overload Power Dissipation in W Forced convection: 87 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 486 W at 200 V, switching frequency 4 kHz Forced Convection: 587 W at 200 V, switching frequency 4 kHz Forced Convection: 687 W at 200 V, switching frequency 4 kHz Forced Convection: 687 W at 200 V, switching frequency 4 kHz Forced Convection: 687 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 200 V, switching frequency 4 kHz Forced Convection: 688 W at 2		
Data Format 8 bits, configurable odd, even or no parity Type Of Polarization No impedance 4 Quadrant Operation Possible True Acceleration And Deceleration Reanys Motor Silip Compensation Automatic whatever the load Can be suppressed Adjustable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Output Voltage 240.0 V Relative Symmetric Network Prequency Televance Sase Load Current At High Overtoad Sase Load Current At High Overtoad Sase Load Current At High Power Dissipation in W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safely Limited Speed (Shi) With Safety Function Safe Speed Mith Safety Function Safe Palse Operating Stop (Sos) With Safety Function Safe False True With Safety Function Safe False With Safety Function Safe False True With Safety Function Safe Speed With Safety Function Safe False True With Safety Function Safe Speed With Safety Function Safe S	Transmission Frame	RTU
Type Of Polarization No impedance 4 Quadrant Operation Possible True Acceleration And Deceleration Ramps Motor Silp Compensation Automatic whatever the load Can be suppressed Aquitable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Input Current \$2.6 A Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance Base Load Current At High Overfoad All Sase Load Current At High Overfoad With Safety Function Safely Limited Speed (Sib) With Safety Function Safel Shake Management (SobSh) With Safety Function Safe False Operating Stop (Sob) With Safety Function Safe False Poperating Stop (Sob) With Safety Function Safe False True True With Safety Function Safe False True True With Safety Function Safe Speed Montary False True True With Safety Function Safe Speed Montary False True True True With Safety Function Safe Speed Montary False True True	Number Of Addresses	1247
4 Quadrant Operation Possible True Accoleration And Deceleration Ramps Motor Silp Compensation Automatic whatever the load Can be suppressed Adjustable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Brake Chopper Integrated True Maximum Output Voltage 240,0 V Reliative Symmetric Network Frequency Tolerance Base Load Current At High Overload Power Dissipation In W Automatic convection: 87 W at 200 V, switching frequency 4 kHz Frequency Tolerance Base Load Current At Low Overload Power Dissipation In W Frequency Mith Safety Function Safe Brake Management (Bod/Sbl) With Safety Function Safe Brake Management (Bod/Sbl) With Safety Function Safe Poeration (Sp) With Safety Function Safe False Operating Stop (Sos) With Safety Function Safe Forgaramable Logic With Safety Function Safe Forgaramable Logic With Safety Function Safe Speed Monitor (Sam) With Safety Function Safe Speed Monitor Operation Safe Speed Monitor Operation Safe Speed With Safety Function Safe Speed Monitor Operation Safe Speed Monitor Operation Safe Speed With Safety Function Safe Speed Monitor Operation Safe Speed With Safety Function Safe Speed Monitor Operation Safe Speed With Safety Function Safe Speed Monitor Operation Safe Speed With Safety Function Safe Speed With Saf	Data Format	8 bits, configurable odd, even or no parity
Acceleration And Deceleration Ramps Motor Slip Compensation Automatic whatever the load Can be suppressed Adjustable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Input Current 52.6 A Maximum Output Voltage 240.0 V Ratlative Symmetric Network Frequency Tolerance Base Load Current At High Overload Base Load Current At Low Overload Power Dissipation in W Natural convection: 87 W at 200 V, switching frequency 4 kHz Froced convection: 486 W at 200 V, switching frequency 4 kHz Froced convection: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Froced convenction: 486 W at 200 V, switching frequency 4 kHz Frue With Safety Function Safe Brake False True With Safety Function Safe Brake False False With Safety Function Safe False False With Safety Function Safe Speed Monitor (Sam) False True Tru	Type Of Polarization	No impedance
Motor Silp Compensation Automatic whatever the load Can be suppressed Adjustable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Input Current 52.6 A Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance Base Load Current At High Overfoad Base Load Current At Low Overfoad Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 466 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safe Brake Management (BouSbt) With Safety Function Safe Brake Management (BouSbt) With Safety Function Safe Power Dissipation In W Natural convection: 486 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, s	4 Quadrant Operation Possible	True
Can be suppressed Adjustable Not available in permanent magnet motor law Braking To Standstill By DC injection Brake Chopper Integrated True Maximum Output Voltage 240,0 V Ralative Symmetric Network Frequency Tolerance Base Load Current At High 48.8 A Overload Base Load Current At Low Overload Base Load Current At Low Overload Base Load Current At Low Overload Sase Load Current At Low Overload Sase Load Current At Low Overload Sase Load Current At Low Forced convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 88 W at 200 V, switching frequency 4 kHz Forced Convection: 89 W at 200 V, switching frequency 4 kHz Forced Convection: 89 W at 200 V, switching frequency 4 kHz Forced Convection: 89 W at 200 V, switching frequency 4 kHz Forced Convection: 89 W at 200 V, switching frequency 4 kHz Forced Convection: 89 W at 200 V, switching frequency 4 kHz Forced Convection: 80 W at 200 V, switching frequency 4 kHz Forced Convection: 80 W	Acceleration And Deceleration Ramps	Linear adjustable separately from 0.019999 s
Brake Chopper Integrated True Maximum Input Current 52.6 A Maximum Input Current 52.6 A Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance Base Load Current At High Overload Base Load Current At Low Overload Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safely Limited Speed (Sis) With Safety Function Safe Brake Management (SboSbt) True With Safety Function Safe Poperating Stop (Sos) With Safety Function Safe Poperating Stop (Sos) With Safety Function Safe Poperating Stop (Sos) With Safety Function Safe Programmable Logic With Safety Function Safe Palse With Safety Function Safe Speed With Safety Function Safe Speed With Safety Function Safe Palse With Safety Function Safe Speed With Safety Function Safe Stop 1 True With Safety Function Safe Speed With Safety Function Sa	Motor Slip Compensation	Can be suppressed Adjustable
Maximum Input Current 52.6 A Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance Base Load Current At High Overload Base Load Current At Low Overload Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safesy Limited Speed (Sis) With Safety Function Safe Brake Management (Subc/St)) With Safety Function Safe Poperating Stop (Sos) With Safety Function Safe False Position (Sp) With Safety Function Safe Fosition (Sp) With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 True T	Braking To Standstill	By DC injection
Maximum Output Voltage 240.0 V Relative Symmetric Network Frequency Tolerance 5 % Frequency Tolerance 5 % Base Load Current At High 46.8 A Overload 63.4 A Overload 70 With Safety Function Safety Inrue 10 Mith Safety Function Safe Brake Management (Sub) With Safety Function Safe Brake Management (Sub) With Safety Function Safe False Position (Sp) With Safety Function Safe False Direction Safe Speed Monitor (Ssm) True With Safety Function Safe Speed False With Safety Function Safe Speed False Direction Safe Speed Monitor (Sm) True With Safety Function Safe Stop 1 True With Safety Function Safe Torque Official Safety False Direction (Sp) True Safe Stop 2 (Ss2) False True Safety Function Safe Speed S	Brake Chopper Integrated	True
Relative Symmetric Network Frequency Tolerance Base Load Current At High Overload Base Load Current At Low Overload Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safely Limited Speed (Sis) With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Position (Sp) With Safety Function Safe Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe Programmable Logic With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 (Ss1) With Safety Function Safe Stop 1 With Safety Function Safe Torque Off (Sto) Off (Sto) With Safety Function Safe Torque Off (Sto) With Safety Function Safe Torque Off (Sto) Off (Sto) Off (Sto) Off (Sto) Off (Sto) Off (Sto)	Maximum Input Current	52.6 A
Frequency Tolerance Base Load Current At High Overload Base Load Current At Low Overload Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safely Limited Speed (Sis) With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Palse Position (Sp) With Safety Function Safe Palse Position (Sp) With Safety Function Safe Speed Monitor (Sam) With Safety Function Safe Speed With Safety Function Safe Stop 1 (Ss1) With Safety Function Safe Stop 2 (Ss2) False With Safety Function Safe Stop 5 False With Safety Function Safe Stop 6 With Safety Function Safe Stop 7 Safe Stop 8 With Safety Function Safe Stop 9 With Safety Function Safe Stop 9 False With Safety Function Safe Torque Off (Sto) With Safety Function Safe Torque Off (Sto) With Safety Function Safe Speed Mith Safety Function Safe Torque Off (Sto) With Safety Function Sa	Maximum Output Voltage	240.0 V
Overload Base Load Current At Low Overload Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safely Limited Speed (Sis) True With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Peperating Stop (Ses) With Safety Function Safe Position (Sp) With Safety Function Safe Position (Sp) With Safety Function Safe False Programmable Logic With Safety Function Safe Speed Monitor (Sam) With Safety Function Safe Stop 1 (Saf) With Safety Function Safe Stop 1 True Off (Sto) With Safety Function Safe Torque Off (Sto) With Safety Function Safe Palse Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: motor Word phase break: motor Thermal protection: drive Safe torque off: drive Overload of output voltage: drive Overcurrent between output phases and earth: drive Overcurrent between output phases and earth: drive Overcoad of output voltage: drive Line supply undervoltage: drive Line supply vonevoltage: drive Line supply vonevoltage: drive Line supply vonevoltage: drive Line supply yphase loss: drive Line supply yphase loss: drive Line supply yphase loss: drive Understand Safe vone Voul Safe Voul	Relative Symmetric Network Frequency Tolerance	5 %
Power Dissipation In W Natural convection: 87 W at 200 V, switching frequency 4 kHz Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Position (Sp) With Safety Function Safe Position (Sp) With Safety Function Safe Position (Sp) With Safety Function Safe False Position (Sp) With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Speed With Safety Function Safe Speed With Safety Function Safe Torque Off (Sto) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overnourent between output phases and earth: drive Overnourent between care and the province of the phase phase	Base Load Current At High Overload	46.8 A
Forced convection: 486 W at 200 V, switching frequency 4 kHz With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe False Programmable Logic With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 True With Safety Function Safe Stop 1 With Safety Function Safe Stop 1 With Safety Function Safe True Off (Sto) With Safety Function Safe Torque Off (Sto) With Safety Function Safe False With Safety Function Saf	Base Load Current At Low Overload	63.4 A
Limited Speed (Sls) With Safety Function Safe Brake Management (Sbc/Sbt) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Position (Sp) With Safety Function Safe Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe Speed Monitor (Sam) With Safety Function Safe Stop 1 True (Ss1) With Safety Function Safe Stop 1 True With Safety Function Safe Stop 1 True Off (Sto) With Safety Function Safe Stop 1 False With Safety Function Safe Stop 2 (Ss2) With Safety Function Safe Stop 3 (Ss2) With Safety Function Safe Stop 4 (Ss2) With Safety Function Safe Stop 5 (Ss2) With Safety Function Safe Stop 7 (Ss2) With Safety Function Safe Stop 8 (Ss2) With Safety Function Safe Stop 9 (Ss2) With Safety F	Power Dissipation In W	
Management (Sbc/Sbt) With Safety Function Safe Operating Stop (Sos) With Safety Function Safe Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 True (Ssf) With Safety Function Safe Stop 2 (Ss2) False With Safety Function Safe Torque Off (Sto) With Safety Function Safe Torque True Off (Sto) With Safety Function Safe Torque True Off (Sto) With Safety Function Safe Torque True Off (Sto) With Safety Function Safe Direction (Stp) With Safety Function Safe False Direction (Sdi) False Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overheating: drive Overcurrent between output phases and earth: drive Overolage on the DC bus: drive Line supply overvoltage: drive Line supply overvoltage: drive Line supply overvoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safely Limited Speed (SIs)	True
Operating Stop (Sos) With Safety Function Safe Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe False Monitor (Ssm) With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 (Ssf) With Safety Function Safe Stop 2 With Safety Function Safe Torque Off (Sto) With Safety Function Safe Direction (Sip) False Direction (Sip) Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overcurrent between output phases and earth: drive Overcurrent between output phases and earth: drive Overcurrent protection: drive Motor phase break: drive Overvoltage: drive Line supply overvoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Overspeed: drive Break on the control circuit: drive	With Safety Function Safe Brake Management (Sbc/Sbt)	True
Position (Sp) With Safety Function Safe Programmable Logic With Safety Function Safe Speed Monitor (Ssm) With Safety Function Safe Stop 1 True (Sst) With Safety Function Safe Stop 2 (Ss2) With Safety Function Safe Stop 2 (Ss2) With Safety Function Safe Torque Off (Sto) With Safety Function Safe Torque Off (Sto) With Safety Function Safe Stop 2 (False With Safety Function Safe Stop Safe Stop Safe Speed Safe Stop Safe Safe Stop Safe Safe Safe Safe Safe Safe Safe Safe	With Safety Function Safe Operating Stop (Sos)	False
With Safety Function Safe Stop 1 (Ss1) With Safety Function Safe Stop 1 (True (Ss1) With Safety Function Safe Stop 2 (Ss2) With Safety Function Safe Torque Off (Sto) With Safety Function Safely Limited Position (Slp) With Safety Function Safely Limited Position (Slp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overclade of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply overvoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safe Position (Sp)	False
Monitor (Ssm) With Safety Function Safe Stop 1 True With Sft Fct Safe Stop 2 (Ss2) False With Safety Function Safe Torque Off (Sto) With Safety Function Safely Limited Position (Slp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overheating: drive Overload of output voltage: drive Short-circuit protection: drive Short-circuit protection: drive Short-circuit protection: drive Universated the DC bus: drive Universated the DC bus: drive Line supply undervoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Direction: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safe Programmable Logic	False
With Safety Function Safe Torque Off (Sto) With Safety Function Safely False With Safety Function Safely False With Safety Function Safely False Limited Position (Slp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overload of output voltage: drive Short-circuit protection: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safe Speed Monitor (Ssm)	False
With Safety Function Safely Limited Position (Slp) With Safety Function Safe Limited Position (Slp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safe Stop 1 (Ss1)	True
Off (Sto) With Safety Function Safely Limited Position (Slp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overload of output voltage: drive Short-circuit protection: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Sft Fct Safe Stop 2 (Ss2)	False
Limited Position (SIp) With Safety Function Safe Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overheating: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set Thermal protection: motor Safe Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: motor Safe torque off: motor Noter phase break: motor Thermal protection: motor Safe torque off: motor Noter phase break: motor Thermal protection: motor Safe torque off: motor Noter phase break: motor Thermal protection: motor Safe torque off: drive Safe	With Safety Function Safe Torque Off (Sto)	True
Direction (Sdi) Protection Type Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Overspeed: drive Break on the control circuit: drive Quantity Per Set 1	With Safety Function Safely Limited Position (Slp)	False
Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive	With Safety Function Safe Direction (Sdi)	False
	Protection Type	Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive
	Quantity Per Set	
	Width	

Height	673 mm	
Depth	274 mm	
Net Weight	27.3 kg	
Electrical Connection	Control: screw terminal 0.51.5 mm²/AWG 20AWG 16 Line side: screw terminal 2550 mm²/AWG 4AWG 1 Motor: screw terminal 2550 mm²/AWG 4AWG 1 DC bus: screw terminal 2550 mm²/AWG 4AWG 1	
Transmission Rate	10/100 Mbit/s for Ethernet IP/Modbus TCP 4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial	
Exchange Mode	Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP	
Data Format	8 bits, configurable odd, even or no parity for Modbus serial	
Type Of Polarization	No impedance for Modbus serial	
Number Of Addresses	1247 for Modbus serial	
Supply	External supply for digital inputs: 24 V DC (1930 V), <1.25 mA, protection type: overload and short-circuit protection Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection Internal supply for digital inputs and STO: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection	
Local Signalling	Local diagnostic: 3 LED (mono/dual colour) Embedded communication status: 5 LED (dual colour) Communication module status: 2 LED (dual colour) Presence of voltage: 1 LED (red)	
Input Compatibility	DI1DI8: discrete input level 1 PLC conforming to IEC 61131-2 DI7, DI8: pulse input level 1 PLC conforming to IEC 65A-68 STOA, STOB: discrete input level 1 PLC conforming to IEC 61131-2	
Discrete Input Logic	Positive logic (source) (DI1DI8), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (DI1DI8), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (DI7, DI8), < 0.6 V (state 0), > 2.5 V (state 1) Positive logic (source) (STOA, STOB), < 5 V (state 0), > 11 V (state 1)	
Sampling Duration	2 ms +/- 0.5 ms (DI1DI8) - discrete input 5 ms +/- 1 ms (DI7, DI8) - pulse input 1 ms +/- 1 ms (AI1, AI2, AI3) - analog input 5 ms +/- 1 ms (AQ1, AQ2) - analog output	
Accuracy	+/- 0.6 % Al1, Al2, Al3 for a temperature variation 60 °C analog input +/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output	
Linearity Error	Al1, Al2, Al3: +/- 0.15 % of maximum value for analog input AQ1, AQ2: +/- 0.2 % for analog output	
Refresh Time	Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)	
Isolation	Between power and control terminals	
Environment		
Operating Altitude	<= 1000 m without derating 10004800 m with current derating 1 % per 100 m	
Operating Position	Vertical +/- 10 degree	
Product Certifications	CSA UL TÜV	
Marking	CE	
Standards	UL 508C IEC 61800-3 IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1	

Maximum Thdi	<48 % from 80100 % of load conforming to IEC 61000-3-12	
Assembly Style	Enclosed	
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6	
Environmental Class (During Operation)	Class 3C3 according to IEC 60721-3-3 Class 3S3 according to IEC 60721-3-3	
Maximum Acceleration Under Shock Impact (During Operation)	150 m/s² at 11 ms	
Maximum Acceleration Under Vibrational Stress (During Operation)	10 m/s² at 13200 Hz	
Maximum Deflection Under Vibratory Load (During Operation)	1.5 mm at 213 Hz	
Permitted Relative Humidity (During Operation)	Class 3K5 according to EN 60721-3	
Volume Of Cooling Air	240 m3/h	
Overvoltage Category	III	
Regulation Loop	Adjustable PID regulator	
Insulation Resistance	> 1 MOhm 500 V DC for 1 minute to earth	
Noise Level	71.5 dB conforming to 86/188/EEC	
Vibration Resistance	1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6 1 gn (f= 13200 Hz) conforming to IEC 60068-2-6	
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27	
Environmental Characteristic	Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to IEC 60721-3-3	
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3	
Ambient Air Temperature For Operation	-1550 °C (without derating) 5060 °C (with derating factor)	
Noise Level	71.5 dB	
Pollution Degree	2	
Ambient Air Transport Temperature	-4070 °C	
Ambient Air Temperature For Storage	-4070 °C	
Packing Units		
Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	55.0 cm	
Package 1 Width	33.5 cm	
Package 1 Length	84.0 cm	

38.0 kg

Package 1 Weight

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Resource performance



Upgraded Components Available

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Product datasheet

ATV930D15M3

Dimensions Drawings

Dimensions


23 Apr 2024


Front, Left and Rear View


Product datasheet

ATV930D15M3

 $\frac{\text{mm}}{\text{in}}$

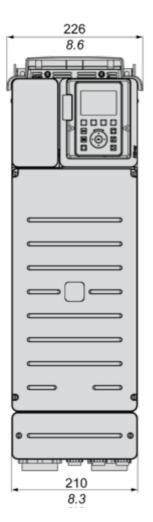


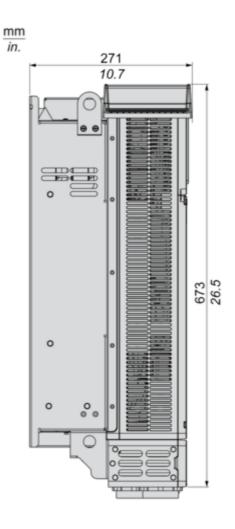

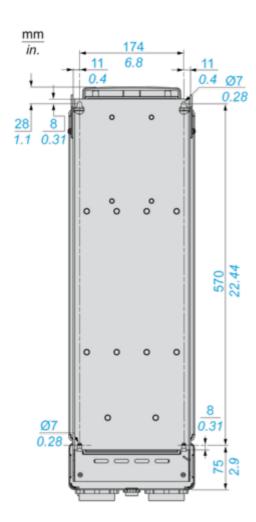

Mounting and Clearance

Clearances

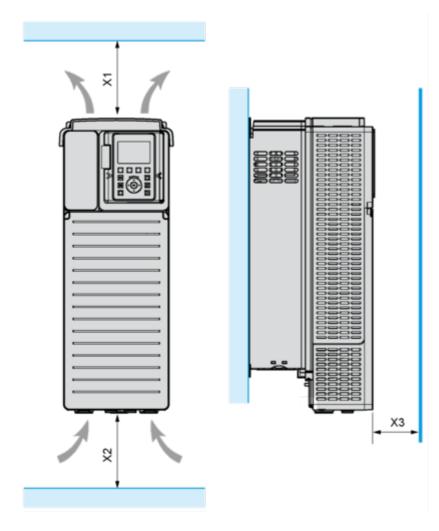


X1	X2	X3
≥ 100 mm (3.94 in.)	≥ 100 mm (3.94 in.)	≥ 10 mm (0.39 in.)

- $_{\bullet}$ Mount the device in a vertical position (±10°). This is required for cooling the device.
- Do not mount the device close to heat sources.
- Leave sufficient free space so that the air required for cooling purposes can circulate from the bottom to the top of the drive.


Mounting Types

Mounting Type A: Individual IP21

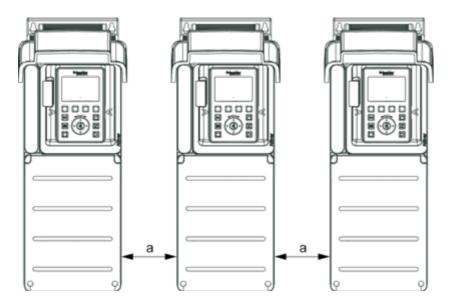


a ≥ = 110 mm (4.33 in.)

Mounting Type B: Side by Side IP20 (Possible, 2 Drives Only)

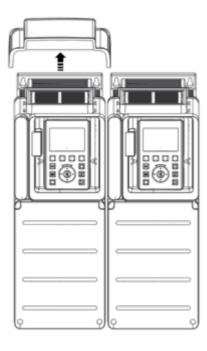

Mounting Type C: Individual IP20

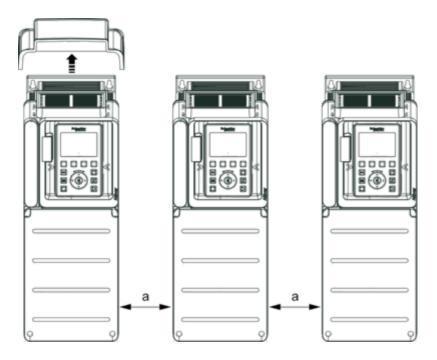


a ≥ = 110 mm (4.33 in.)

Connections and Schema

Three-Phase Power Supply with Upstream Breaking via Line Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

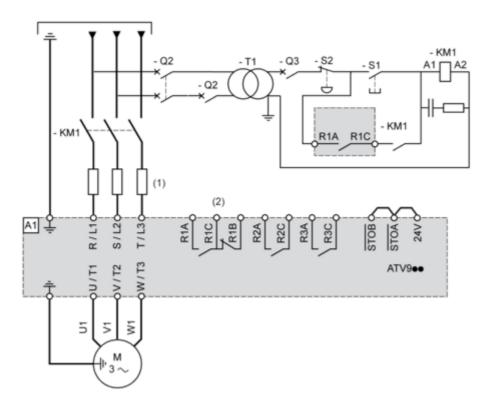

(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.


A1 : Drive

KM1 : Line Contactor Q2, Q3 : Circuit breakers S1, S2 : Pushbuttons

T1: Transformer for control part

Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

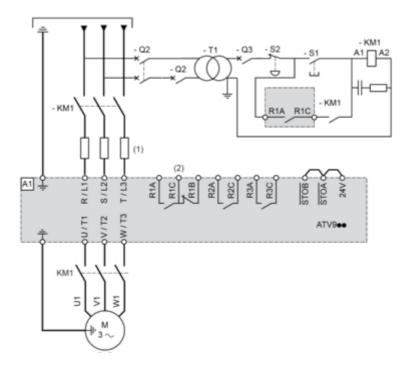


(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.


A1 : Drive KM1 : Contactor

Control Block Wiring Diagram

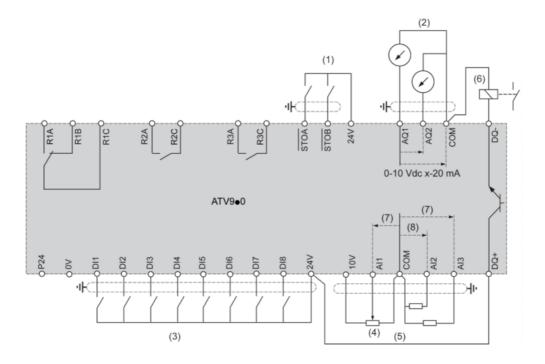

- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input
- (6) Digital Output
- (7) 0-10 Vdc, x-20 mA
- (8) 0-10 Vdc, -10 Vdc...+10 Vdc R1A, R1B, R1C : Fault relay R2A, R2C : Sequence relay R3A, R3C : Sequence relay

Sensor Connection




It is possible to connect either 1 or 3 sensors on terminals Al1 or Al3

Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs




Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

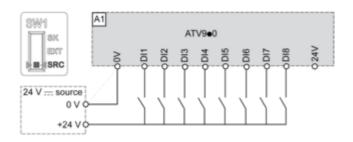

Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs




Switch Set to EXT Position Using an External Power Supply for the DIs

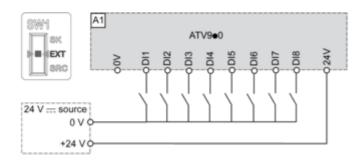

16

Performance Curves

Derating Curves

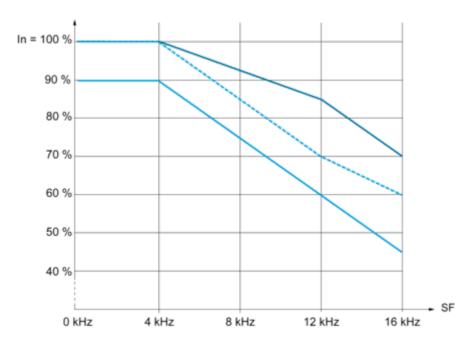

40 °C (104 °F) - Mounting type A, B and C 50 °C (122 °F) - Mounting type A, B and C 60 °C (140 °F) - Mounting type B and C

In: Nominal Drive Current SF: Switching Frequency