Specifications





variable speed drive ATV61 - 400kW 600HP - 380...480V - IP20

ATV61HC40N4

- Discontinued on: Jul 23, 2021 AD
- ! To be end-of-service on: Dec 31, 2028 AD

(!) To be discontinued

Main

Range Of Product	Altivar 61
Product Or Component Type	Variable speed drive
Product Specific Application	Pumping and ventilation machine
Component Name	ATV61
Motor Power Kw	355 kW, 3 phases at 380480 V 400 kW, 3 phases at 380480 V
Motor Power Hp	600 hp, 3 phases at 380480 V
Power Supply Voltage	380480 V - 1510 %
Supply Number Of Phases	3 phases
Line Current	597 A for 480 V 3 phases 355 kW 637 A for 380 V 3 phases 355 kW 644 A for 480 V 3 phases 400 kW / 600 hp 709 A for 380 V 3 phases 400 kW / 600 hp
Emc Filter	Level 3 EMC filter
Assembly Style	With heat sink
Apparent Power	419.3 kVA at 380 V 3 phases 355 kW 466.6 kVA at 380 V 3 phases 400 kW / 600 hp
Maximum Prospective Line Isc	50 kA for 3 phases
Maximum Transient Current	910.8 A for 60 s, 3 phases
Nominal Switching Frequency	2.5 kHz
Switching Frequency	28 kHz adjustable 2.58 kHz with derating factor
Asynchronous Motor Control	Voltage/frequency ratio - Energy Saving, quadratic U/f Voltage/frequency ratio, 2 points Voltage/frequency ratio, 5 points Flux vector control without sensor, standard
Synchronous Motor Control Profile	Vector control without sensor, standard
Communication Port Protocol	Modbus CANopen
Type Of Polarization	No impedance for Modbus

Option Card	Communication card for APOGEE FLN
	Communication card for BACnet
	Communication card for CC-Link
	Controller inside programmable card
	Communication card for DeviceNet
	Communication card for EtherNet/IP
	Communication card for Fipio
	I/O extension card
	Communication card for Interbus-S
	Communication card for LonWorks
	Communication card for METASYS N2
	Communication card for Modbus Plus
	Communication card for Modbus TCP
	Communication card for Modbus/Uni-Telway
	Multi-pump card
	Communication card for Profibus DP
	Communication card for Profibus DP V1

Complementary

Product Destination	Synchronous motors Asynchronous motors
Power Supply Voltage Limits	323528 V
Power Supply Frequency	5060 Hz - 55 %
Power Supply Frequency Limits	47.563 Hz
Continuous Output Current	759 A at 2.5 kHz, 380 V - 3 phases 759 A at 2.5 kHz, 460 V - 3 phases
Output Frequency	0.1500 Hz
Speed Range	1100 in open-loop mode, without speed feedback
Speed Accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn without speed feedback
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback
Transient Overtorque	130 % of nominal motor torque +/- 10 % for 60 s
Braking Torque	<= 125 % with braking resistor 30 % without braking resistor
Regulation Loop	Frequency PI regulator
Motor Slip Compensation	Can be suppressed Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points) Adjustable
Diagnostic	1 LED (red) for drive voltage
Output Voltage	<= power supply voltage
Electrical Isolation	Between power and control terminals
Type Of Cable For Mounting In An Enclosure	With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC With UL Type 1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPR
Electrical Connection	Terminal 2.5 mm² / AWG 14 (AI1-/AI1+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, LI1LI6, PWR) Terminal 4 x 185 mm² / 4 x 500 kcmil (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) Terminal 8 x 185 mm² / 4 x 500 kcmil (PC/-, PO, PA/+)
Tightening Torque	0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, LI1LI6, PWR) 41 N.m, 360 lb.in (PC/-, PO, PA/+) 41 N.m, 360 lb.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3)
Supply	Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC, +/- 5 %, <10 mA with overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA with overload and short-circuit protection External supply: 24 V DC (1930 V)
Analogue Input Number	2

Al2 software-configurable current: 0 _ 20 mA, impedance: 242 Ohm, resolution 11 bits Al2 software-configurable voltage: 0 _ 10 V DC 24 V max, impedance: 30000 Ohm, resolution 11 bits Al2 software-configurable voltage: 0 _ 10 V DC 24 V max, impedance: 30000 Ohm, resolution 11 bits Al2 software-configurable voltage: 0 _ 10 V DC 24 V max, impedance: 30000 Ohm, resolution 12 ms + 0 B ms (A11-Al1+) - analog input 2 ms + 0 B ms (A11-Al1+) - analog input 2 ms + 0 B ms (A11-Al1+) - analog input 2 ms + 0 B ms (A11-Al1+) - analog input 2 ms + 0 B ms (A11-Al1+) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a temperature variation 60 ° C + 0 B % (A12) for a maximum value (A12) + 0 B % (A12) for a software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits A01 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Discrete Output Number 2 Configurable relay logic: (R14, R18, R1C) NOINC - 100000 cycles Configurable relay logic: (R14, R18, R1C) NOINC - 100000 cycles Configurable relay logic: (R14, R28) NO - 100000 cycles Configurable relay logic: (R14, R28) NO - 100000 cycles Maximum Response Time R1 R18 R1C = 7 ms, Ibelance + 0.5 ms R24, R26 = 7 ms, Ibelance + 0.5 ms R25, R26 = 7 ms, Ibelance + 0.5 ms R26, R26 = 7 ms, Ibelance + 0.5 ms R27, R26 = 7 ms, Ibelance + 0.5 ms R28, R26 = 7 ms, Ibelance + 0.5 ms R28, R26 = 7 ms, Ibelance + 0.5 ms R28, R26 = 7 ms, Ibelance + 0.5 ms R28, R26 = 0.5 ms (R25) A C configurable relay logic Discrete Input Number 7 Discrete Input Vipe		
Sampling Time 2 ms +/- 0.5 ms (Al7-Al1+) - analog input 2 ms +/- 0.5 ms (Al7) - analog utput 2 ms +/- 0.5 ms (Al7) - analog utput 2 ms +/- 0.5 ms (Al7) - analog utput 2 ms +/- 0.5 ms (L10) frontigured as logic input - discrete input 2 ms +/- 0.5 ms (L10) frontigured as logic input - discrete input 2 ms +/- 0.5 ms (L10) frontigured as logic input - discrete input 2 ms +/- 0.5 ms (L10) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/- 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/ 0.8 % (Al2) for a temperature variation 60 °C +/	Analogue Input Type	Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution 11 bits
2 ms + / 0.5 ms (AD) - analog input 2 ms + / 0.5 ms (LH1LI5) - discrete input 2 ms + / 0.5 ms (LH1LI5) - discrete input 2 ms + / 0.5 ms (LH1LI5) - discrete input 3 ms + / 0.5 ms (LH1LI5) - discrete input 4 + 0.6 % (AH1-AH1+) for a temperature variation 60 °C 4 + 0.6 % (AH1-AH1+) for a temperature variation 60 °C 4 + 1.9 % (AD) for a temperature variation 60 °C 4 + 1.9 % (AD) for a temperature variation 60 °C 4 + 1.9 % (AD) for a temperature variation 60 °C 4 + 1.9 % (AD) for a temperature variation 60 °C 4 + 1.9 % (AD) for a temperature variation 60 °C 4 + 0.6 % (AH1-AH1+) 4 + 0.15 % of maximum value (AI1-AH1+) 4 + 0.15 % of maximum value (AI2) 4 + 0.15 % of maximum		
2 ms + 0.5 ms (AD) - analog input 2 ms + 0.5 ms (L11L15) - discrete input 2 ms + 0.5 ms (L11L15) - discrete input 2 ms + 0.5 ms (L11L15) - discrete input 3 ms + 0.5 ms (L11L15) - discrete input 4 - 0.6 % (Al1-Al1+) for a temperature variation 60 °C 4 - 0.6 % (Al2) for a temperature variation 60 °C 4 - 0.6 % (Al2) for a temperature variation 60 °C 4 - 0.1 % (Analogue of the temperature variation 60 °C 4 - 0.1 % (Analogue of temperature variation 60 °C 4 - 0.2 % (AO1) 5 Analogue Output Number 1 Analogue Output Type A01 software-confligurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits A01 software-confligurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits A01 software-confligurable indiguing output 10 V, 20 mA Analogue Output Number 2 Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NOINC - 10000	Sampling Time	2 ms +/- 0.5 ms (AI1-/AI1+) - analog input
2 ms +/- 0.5 ms (L11LI5) - discrete input 2 ms +/- 0.5 ms (L11LI5) - discrete input 3 hasolute Accuracy Precision +/- 0.6 % (A11-A11+) for a temperature variation 60 °C +/- 0.6 % (A21) for a temperature variation 60 °C +/- 1.1 % (A01) for a temperature variation 60 °C +/- 1.1 % (A01) for a temperature variation 60 °C +/- 1.1 % (A01) for a temperature variation 60 °C +/- 1.1 % (A01) for a temperature variation 60 °C +/- 1.1 % (A01) for a temperature variation 60 °C +/- 1.0 £ % (A01) Analogue Output Number 1 Analogue Output Type A01 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits A01 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits A01 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Discrete Output Type Configurable relay logic: (R1A, R1B, R1C) NOINC - 100000 cycles Configurable relay logic: (R1A, R2B) NO - 1000000 cycles Configurable relay logic: (R1A, R2B) NO - 1000000 cycles 410 ms in STO (Safe Torque Off) R1A, R1B, R1C <= 7 ms, lolerance +/- 0.5 ms R2A, R2B <= 7 ms, lolerance +/- 0.5 ms R2A, R2B <= 7 ms, lolerance +/- 0.5 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R =		2 ms +/- 0.5 ms (Al2) - analog input
Absolute Accuracy Precision ## - 0.8 % (A11-A11+) for a temperature variation of °C ## - 0.8 % (A15-A11+) for a temperature variation of °C ## - 0.8 % (A21) for a temperature variation of °C ## - 0.15 % (A7) for a temperature variation of °C ## - 0.15 % of maximum value (A11-A11+) ## - 0.15 % of maximum value (A12) ## - 0.15 % of maximum value (
Absolute Accuracy Precision #*-0.6 % (AIZ) for a temperature variation 60 °C #*-0.6 % (AIZ) for a temperature variation 60 °C #*-1.5 % (AOZ1) for a temperature variation 60 °C #*-1.5 % (AOZ1) for a temperature variation 60 °C #*-1.5 % of maximum value (AIZ-AIX+) #*-0.15 % of maximum value (AIZ-AIX+) #*-0.15 % of maximum value (AIZ-AIX+) #*-0.2 % (AOZ1) Analogue Output Number Analogue Output Type AOI software-configurable current, analogue output range 020 mA, impedance: 800 0hm, resolution 10 bits AOI software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Discrete Output Type Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Analogue Output Type Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Analogue Output Type Analogue Current Analogue Current Analogue Current Analogue Current R1, R2C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A		
#*-0.0% (AIZ) for a temperature variation 60 °C +/-1 % (AOT) for a temperature variation 60 °C +/-1 % (AOT) for a temperature variation 60 °C +/-1 % (AOT) for a temperature variation 60 °C +/-0.2 % (AOT) -/-0.2 % (AOT) Analogue Output Number Analogue Output Type AOT software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits AOT software-configurable voltage, analogue output range 010 ∨ DC, impedance: 470 Ohm, resolution 10 bits AOT software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Discrete Output Type Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles		
#-1 % (A01) for a temperature variation 60 °C #-0.15 % of maximum value (A1-AIH+) #-0.15 % of maximum value (A1-AIH+) #-0.15 % of maximum value (A12) #-0.2 % (A01) Analogue Output Number Analogue Output Type A01 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits A01 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits A01 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Anaximum Response Time **A 100 msi n STO (Safe Torque Off) R1A, R1B, R1C ~*3 7 ms, tolerance */- 0.5 ms R2A, R2B ~*3 ms, tolerance */- 0.5 ms R2A, R2B ~*3 ms, tolerance */- 0.5 ms R2A, R2B ~*3 ms, tolerance */- 0.5 ms R1, R2: 2 A at 30 V DC resistive load, cos phi = 0.4 and UR = 7 ms R1, R2: 2 A at 30 V DC resistive load, cos phi = 0.4 and UR = 7 ms R1, R2: 2 A at 30 V DC resistive load, cos phi = 1 and LR = 0 ms Discrete Input Type Programmable (L11, L15)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (L10)6 8 probes - 1500 Ohm Switch-configurable PTC probe (L10)6 8 probes - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safely	Absolute Accuracy Precision	
## Analogue Output Number Analogue Output Type Analogue Output Number Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles AD Secrete Output Type Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Anaximum Response Time **C = 100 ms in STO (Safe Torque Off) R1A, R1B, R1C < 7 ms, tolerance +1- 0.5 ms R2A, R2B = 7 ms, tolerance +1- 0.5 ms R2A, R2B = 7 ms, tolerance +1- 0.5 ms R2A, R2B = 7 ms, tolerance +1- 0.5 ms R2A, R2B = 7 ms, tolerance +1- 0.5 ms R2A, R2B = 7 ms, tolerance +1- 0.5 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 250 V AC esito ded. cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 250 V AC esito ded. cos phi = 0.4 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms Programmable (L11, L15)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC probe (L16)0 6 probes - 1500 Ohm Switch-configurable PC probe (L16)0 6 probes - 1500 Ohm Switch-configurable PC probe (L16)0 9 probes - 1500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PC (see 30		
#-0.15 % of maximum value (AI2) #-0.2 % (AO1) Analogue Output Number Analogue Output Type AO1 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits AO1 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Maximum Response Time <= 100 ms in STO (Safe Torque Off) R1A, R1B, R1C < 7 ms, lolerance +0.5 ms		
Analogue Output Number 1 Analogue Output Type AO1 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits AO1 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Analogue Output Type Configurable relay logic: (R2A, R2B) NO - 100000 cycles Analogue Output Type Configurable relay logic: (R2A, R2B) NO - 100000 cycles Analogue Output Type Programmable (L11L15)24 V DC (resistive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 0 ms R1, R2: 5 A at 30 V DC inductive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1,	Linearity Error	
Analogue Output Number Analogue Output Type Analogue Output Number 2 Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NONC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NONC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NONC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NONC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Anaximum Response Time 4= 100 ms in STO (Safe Torque Off) R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, tolerance +/- 0.5 ms R2A, R2B <= 2 ms, to		
Analogue Output Type AO1 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits AO1 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Asximum Response Time <a hr<="" td=""><td></td><td>17 0.2 70 (NOT)</td>		17 0.2 70 (NOT)
Sou Ohm, resolution 10 bits	Analogue Output Number	1
500 Ohm, resolution 10 bits AO1 software-configurable lovalage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Discrete Output Type Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Asximum Response Time <= 100 ms in STO (Safe Torque Off"> R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC for configurable relay logic R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms Programmable (L11L15)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (L16)06 probes - 1500 Ohm Switch-configurable PTC probe (L16)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety input (PWR)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Safety	Analogue Output Type	AO1 software-configurable current, analogue output range 020 mA, impedance:
A70 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic Maximum Switching Current 3 mA at 24 V DC for configurable relay logic R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 C At 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive lo		500 Ohm, resolution 10 bits
AO1 software-configurable logic output 10 V, 20 mA Discrete Output Number 2 Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles 4		
Discrete Output Type Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 1000000 cycles R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive		•
Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Asximum Response Time		
Configurable relay logic: (R2A, R2B) NO - 100000 cycles **A R1B, R1C = 7 ms, tolerance +/- 0.5 ms R2A, R2B =	Discrete Output Number	2
Maximum Response Time	Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles
R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R1A, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (L16);24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (L16);06 probes - 1500 Ohm Safety input (PWR);24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR);24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR);24 V DC (<= 30 V) - 1500 Ohm Safety logic (sink) (L11,L15), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (L1L15), < 5 V (state 0), < 10 V (state 1) Positive logic (source) (L16) onfigured as logic input, < 5 V (state 0), < 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Line supply undervoltage: drive Line supply undervoltage: drive Une supply undervoltage: drive Une supply undervoltage: drive Over-removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 250 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable [L16]:24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (L16):06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (P	Maximum Response Time	<= 100 ms in STO (Safe Torque Off)
Minimum Switching Current 3 mA at 24 V DC for configurable relay logic Maximum Switching Current R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2 A at 250 V AC resistive load, cos phi = 1 and L/R = 7 ms R1, R2: 2		· · · · · · · · · · · · · · · · · · ·
Maximum Switching Current R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 At 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 At 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 At 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 At 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 At 30 V DC resistive load, cos		
R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms Programmable (LI1LI5)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Prositive logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic	Minimum Switching Current	3 mA at 24 V DC for configurable relay logic
R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V, with level 1 PLC - 3500 Ohm R1	Maximum Switching Current	R1. R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms
Programmable (LI1LI5)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Discrete Input Logic Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), > 5 V (state 0), > 11 V (state 1) Positive logic (sink) (LI6) foonfigured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 10 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 10 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 10 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 10 V (state 1) Positive logic (source) (LI6) foonfigured as logic input, > 5 V (state 0), > 10 V (state 1) Positive logic (source) (LI6, LI5), > 10 V (state 1) Positive logic (source) (LI6, LI5), > 10 V (state 1) Positive logic (source) (LI6, LI5), > 10 V (state 1) Positive logic (source)		R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms
Programmable (LI1LI5)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Discrete Input Logic Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), > 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Overcurrent between output phases and earth: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Programmable (L11L15)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (L16)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (L16)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Discrete Input Logic Negative logic (sink) (L11L15), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (L11L15), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (L16)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L11L15), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L11L15), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), < 10 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 11 V (state 1) Positive logic (source) (L16)if configured as logic input, < 6 V (state 0), > 10 V (state 1) Po		R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms
Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Safety input (Sink) (LI1LI5), < 5 V (state 0), < 10 V (state 1) Positive logic (sink) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overrourrent between output phases and earth: drive Overroutages on the DC bus: drive Power removal: drive Notor phase break: motor Power removal: motor Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	Discrete Input Number	7
Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Discrete Input Logic Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized Braking To Standstill By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply undervoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overcurtent between output phases and earth: drive Overcultages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	Discrete Input Type	Programmable (LI1LI5)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm
Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized Braking To Standstill By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply undervoltage: drive Overvoltage: drive Overvoltages on the DC bus: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Overvoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm
Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overcurrent between output phases and earth: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm
Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection Protection Type Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply undervoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overcheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	Discrete Input Logic	Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1)
Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1) Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized Braking To Standstill By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized Braking To Standstill By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase breaks: motor Power removal: motor Thermal protection: motor		
Acceleration And Deceleration Ramps Linear adjustable separately from 0.01 to 9000 s Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized By DC injection By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Automatic adaptation of ramp if braking capacity exceeded, by using resistor S, U or customized Braking To Standstill By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		1/
S, U or customized Braking To Standstill By DC injection Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	Acceleration And Deceleration	
Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	namps	
Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		·
Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	вгакіng To Standstill	By DC injection
Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor	Protection Type	e e e
Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		·
Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		***
Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		Overheating protection: drive
Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor		
Motor phase break: motor Power removal: motor Thermal protection: motor		·
Power removal: motor Thermal protection: motor		
Thermal protection: motor		·
nsulation Resistance > 1 mOhm 500 V DC for 1 minute to earth		Thermal protection: motor
- I MOTHIN OUG V DO TOL I MINING TO CALLII	Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth

Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
Physical Interface	2-wire RS 485 for Modbus
Transmission Frame	RTU for Modbus
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal
Number Of Addresses	1127 for CANopen 1247 for Modbus
Method Of Access	Slave CANopen
Marking	CE
Operating Position	Vertical +/- 10 degree
Net Weight	320 kg
Width	890 mm
Height	1390 mm
Depth	377 mm

Environment

Noise Level	70 dB conforming to 86/188/EEC
Dielectric Strength	3535 V DC between earth and power terminals 5092 V DC between control and power terminals
Electromagnetic Compatibility	Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Standards	EN 61800-3 environments 2 category C3 EN 55011 class A group 2 EN 61800-3 environments 1 category C3 IEC 60721-3-3 class 3C2 EN/IEC 61800-3 UL Type 1 EN/IEC 61800-5-1
Product Certifications	CSA DNV UL C-Tick NOM 117 GOST
Pollution Degree	3 conforming to EN/IEC 61800-5-1 3 conforming to UL 840
Degree Of Proctection	IP41 on upper part conforming to EN/IEC 60529 IP41 on upper part conforming to EN/IEC 61800-5-1 IP00 conforming to EN/IEC 60529 IP00 conforming to EN/IEC 61800-5-1 IP30 on side parts conforming to EN/IEC 60529 IP30 on side parts conforming to EN/IEC 61800-5-1 IP30 on the front panel conforming to EN/IEC 60529 IP30 on the front panel conforming to EN/IEC 60529
Vibration Resistance	0.6 gn (f= 10200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 310 Hz) conforming to EN/IEC 60068-2-6

Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27				
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3				
Ambient Air Temperature For Operation	-1045 °C (without derating) 4560 °C (with derating factor)				
Ambient Air Temperature For Storage	-2570 °C				
Operating Altitude	<= 1000 m without derating				

Packing Units

_	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	53.0 cm
Package 1 Width	92.0 cm
Package 1 Length	145.0 cm
Package 1 Weight	336.0 kg
Unit Type Of Package 2	PAL
Number Of Units In Package 2	1
Package 2 Height	57.15 cm
Package 2 Width	92.71 cm
Package 2 Length	146.05 cm
Package 2 Weight	364.234 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)				
	EU RoHS Declaration				
China Rohs Regulation	China RoHS declaration				
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins				

Dimensions Drawings

UL Type 1/IP 20 Drives

Dimensions with or without 1 Option Card (1)

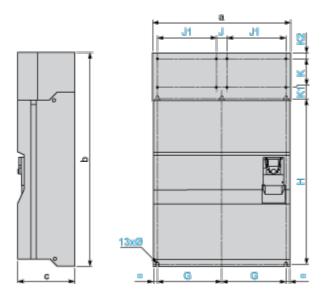

Dimensions in mm


а	b	С	G	J	J1	Н	K	K1	K2	Ø	
890	1390	377	417.5	75	380	1120	150	75	30	11.5	

Dimensions in in.

а		b	С	G	J	J1	Н	K	K1	K2	Ø
35.	04	54.72	14.84	16.44	2.95	14.96	44.09	5.90	2.95	1.18	0.45

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Dimensions with 2 Option Cards (1)

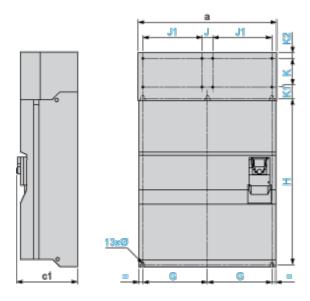

Dimensions in mm

ATV61HC40N4

а	с1	G	J	J1	Н	K	K1	K2	Ø
890	392	417.5	75	380	1120	150	75	30	11.5

Dimensions in in.


а	c1	G	J	J1	Н	K	K1	K2	Ø
35.04	15.43	16.44	2.95	14.96	44.09	5.90	2.95	1.18	0.45

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Mounting and Clearance

Mounting Recommendations


Clearance

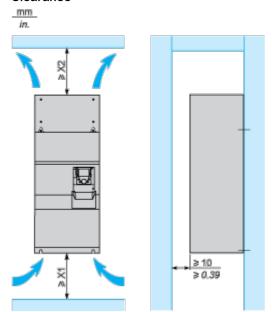


X1 in mm	X2 in mm	X1 in in.	X2 in in.
250	300	9.84	11.81

These drives can be mounted side by side, observing the following mounting recommendations:



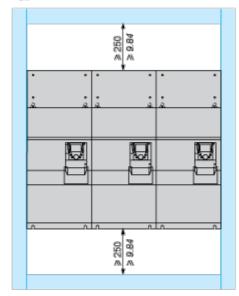

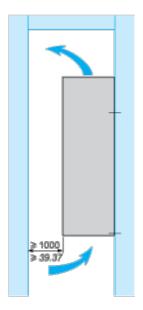


Specific Recommendations for Mounting the Drive in an Enclosure

Ventilation

To ensure proper air circulation in the drive:

- . Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.

Dust and Damp Proof Metal Enclosure (IP 54)


The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc.

This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Upstream Breaking via Contactor

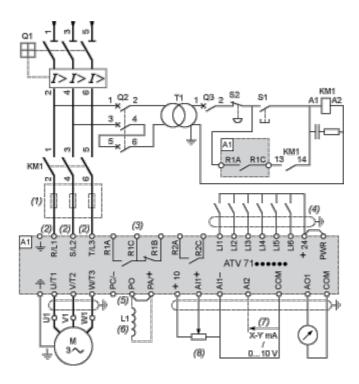

A1 ATV61 drive

KM1 Contactor

L1 DC choke

Q1 Circuit-breaker

Q2 GV2 L rated at twice the nominal primary current of T1

Q3 GB2CB05

S1, S2 XB4 B or XB5 A pushbuttons


T1 100 VA transformer 220 V secondary

- (1) Line choke (three-phase); mandatory for ATV61HC11Y...HC80Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV61HC50N4, ATV61HC63N4 and ATV61HC50Y...HC80Y drives, refer to the power terminal connections diagram.
- (3) Fault relay contacts. Used for remote signalling of the drive status.
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (5) There is no PO terminal on ATV61HC11Y...HC80Y drives.
- (6) Optional DC choke for ATV61H•••M3, ATV61HD11M3X...HD45M3X and ATV61H075N4...HD75N4 drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV61HD55M3X...HD90M3X, ATV61HD90N4...HC63N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it. For ATV61W•••N4 and ATV61W•••N4C drives, the DC choke is integrated.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.

Product datasheet ATV61HC40N4

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1


Three-Phase Power Supply with Downstream Breaking via Switch Disconnector

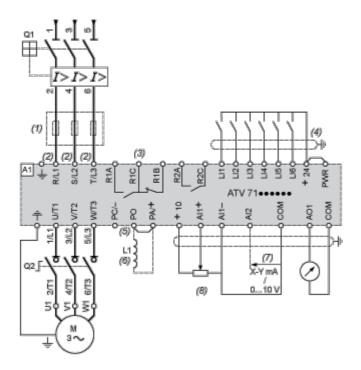

- A1 ATV61 drive
- L1 DC choke
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)
- (1) Line choke (three-phase), mandatory for ATV61HC11Y...HC80Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV61HC50N4, ATV61HC63N4 and ATV61HC50Y...HC80Y drives, refer to the power terminal connections diagram.
- (3) Fault relay contacts. Used for remote signalling of the drive status.
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user quide).
- (5) There is no PO terminal on ATV61HC11Y...HC80Y drives.
- (6) Optional DC choke for ATV61H•••M3, ATV61HD11M3X...HD45M3X and ATV61H075N4...HD75N4 drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV61HD55M3X...HD90M3X, ATV61HD90N4...HC63N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it. For ATV61W•••N4 and ATV61W•••N4C drives, the DC choke is integrated.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply, Low Inertia Machine, Vertical Movement

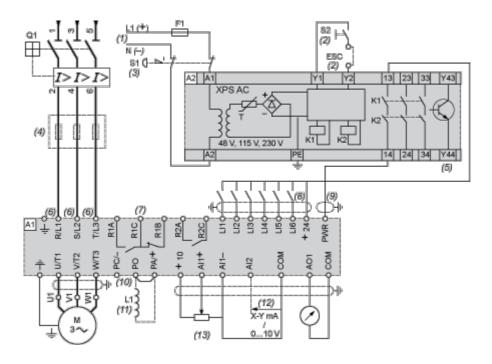

A1 ATV61 drive

A2 Preventa XPS AC safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" function for several drives on the same machine. In this case, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS AC module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 contacts
- S2 XB4 B or XB5 A pushbutton
- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) S2: resets XPS AC module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (3) Requests freewheel stopping of the movement and activates the "Power Removal" safety function.
- (4) Line choke (three-phase), mandatory for and ATV61HC11Y...HC80Y drives (except when a special transformer is used (12-pulse)).
- (5) The logic output can be used to signal that the machine is in a safe stop state.
- (6) For ATV61HC50N4, ATV61HC63N4 and ATV61HC50Y...HC80Y drives, refer to the power terminal connections diagram.
- (7) Fault relay contacts. Used for remote signalling of the drive status.
- (8) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (9) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm /0.09 in., maximum length 15 m / 49.21 ft. The cable shielding must be earthed.
- (10) There is no PO terminal on ATV61HC11Y...HC80Y drives.
- (11) Optional DC choke for ATV61H•••M3, ATV61HD11M3X...HD45M3X and ATV61H075N4...HD75N4 drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV61HD55M3X...HD90M3X,


ATV61HC40N4

ATV61HD90N4...HC63N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it. For ATV61W•••N4 and ATV61W•••N4C drives, the DC choke is integrated.

- (12) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (13) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

Three-Phase Power Supply, High Inertia Machine

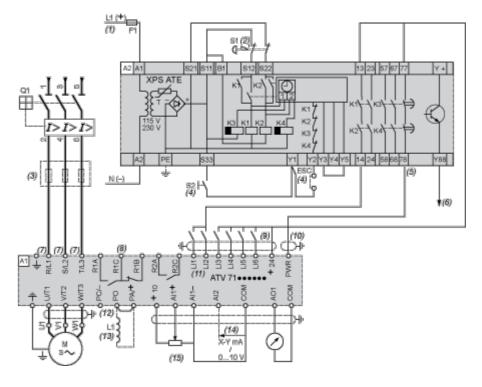

A1 ATV61 drive

A2 (5) Preventa XPS ATE safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" safety function for several drives on the same machine. In this case the time delay must be adjusted on the drive controlling the motor that requires the longest stopping time. In addition, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS ATE module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 contacts
- S2 XB4 B or XB5 A pushbutton
- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) Requests controlled stopping of the movement and activates the "Power Removal" safety function.
- (3) Line choke (three-phase), mandatory for ATV61HC11Y...HC80Y drives (except when a special transformer is used (12-pulse)).
- (4) S2: resets XPS ATE module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (5) The logic output can be used to signal that the machine is in a safe state.
- (6) For stopping times requiring more than 30 seconds in category 1, use a Preventa XPS AV safety module which can provide a maximum time delay of 300 seconds.
- (7) For ATV61HC50N4, ATV61HC63N4 and ATV61HC50Y...HC80Y drives, refer to the power terminal connections diagram.
- (8) Fault relay contacts. Used for remote signalling of the drive status.

ATV61HC40N4

- (9) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (10) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm/0.09 in., maximum length 15 m/49.21 ft. The cable shielding must be earthed.
- (11) Logic inputs LI1 and LI2 must be assigned to the direction of rotation: LI1 in the forward direction and LI2 in the reverse direction.
- (12) There is no PO terminal on ATV61HC11Y...HC80Y drives.
- (13) Optional DC choke for ATV61H•••M3, ATV61HD11M3X...HD45M3X and ATV61H075N4...HD75N4 drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV61HD55M3X...HD90M3X, ATV61HD90N4...HC63N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it. For ATV61W•••N4 and ATV61W•••N4C drives, the DC choke is integrated.
- (14) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (15) Reference potentiometer.


Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature and the switching frequency. For intermediate temperatures (e.g. 55°C), interpolate between 2 curves.

Drive combined with a 355 kW motor


17 in (%)



X Switching frequency

Drive combined with a 400 kW motor

17 In (%)



X Switching frequency