

Product data sheet

Specifications



soft starter for asynchronous motor,
Altistart 01, ATS01, 6A, 110 to
480V, 0.75 to 3kW

ATS01N106FT

Main

Range Of Product	Altistart 01
Product Or Component Type	Soft starter
Product Destination	Asynchronous motors
Product Specific Application	Simple machine
Device Short Name	ATS01
Network Number Of Phases	1 phase
[Us] Rated Supply Voltage	110...480 V - 10...10 %
Motor Power Kw	3 kW, 3 phases 400 V 0.75 kW, 3 phases 230 V 1.1 kW, 3 phases 230 V 2.2 kW, 3 phases 400 V 0.75 kW, 1 phase 230 V
Motor Power Hp	1 hp, 3 phases 230 V 2 hp, 3 phases 460 V 3 hp, 3 phases 460 V 0.5 hp, 3 phases 210 V 1.5 hp, 3 phases 230 V
Icl Starter Rating	6 A
Utilisation Category	AC-53B EN/IEC 60947-4-2
Current Consumption	30 A at nominal load
Type Of Start	Start with voltage ramp
Power Dissipation In W	1 W at full load and at end of starting 31 W in transient state

Complementary

Assembly Style	With heat sink
Function Available	Integrated bypass
Supply Voltage Limits	99...528 V
Supply Frequency	50...60 Hz - 5...5 %
Network Frequency	47.5...63 Hz
Output Voltage	<= power supply voltage
[Uc] Control Circuit Voltage	110 V AC +/- 10 % 30 mA 24 V AC/DC +/- 10 % 25 mA 240 V AC +/- 10 % 65 mA
Starting Time	1 s / 100 5 s / 20 Adjustable from 1 to 5 s
Starting Torque	30...80 % of starting torque of motor connected directly on the line supply

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discrete Output Current	2 A DC-13 3 A AC-15
Tightening Torque	7.08 lbf.in (0.8 N.m)
Electrical Connection	Cage type connector - rigid 1 2.5 mm² AWG 14 control circuit Cage type connector - rigid with cable end 1 2.5 mm² AWG 14 power circuit Cage type connector - rigid without cable end 2 1 mm² AWG 17 control circuit Cage type connector - rigid without cable end 2 1 mm² AWG 17 power circuit Cage type connector - flexible with cable end 1 2.5 mm² AWG 14 control circuit Cage type connector - flexible with cable end 1 2.5 mm² AWG 14 power circuit Cage type connector - flexible without cable end 1 2.5 mm² AWG 14 control circuit Cage type connector - flexible without cable end 1 2.5 mm² AWG 14 power circuit Cage type connector - flexible with cable end 2 0.75 mm² AWG 18 control circuit Cage type connector - flexible with cable end 2 0.75 mm² AWG 18 power circuit Cage type connector - flexible without cable end 2 1 mm² AWG 17 control circuit Cage type connector - flexible without cable end 2 1 mm² AWG 17 power circuit
Marking	CE
Operating Position	Vertical +/- 10 degree
Height	3.94 in (100 mm)
Width	0.91 in (23 mm)
Depth	3.94 in (100 mm)
Net Weight	0.35 lb(US) (0.16 kg)
Compatibility Code	ATS01N1
Motor Power Range Ac-3	0.55...1 kW 200...240 V 3 phases 1.1...2 kW 380...440 V 3 phases 0.55...1 kW 200...240 V 1 phase 1.1...2 kW 200...240 V 3 phases 2.2...3 kW 380...440 V 3 phases
Motor Starter Type	Soft starter

Environment

Electromagnetic Compatibility	Conducted and radiated emissions level B CISPR 11 Conducted and radiated emissions level B IEC 60947-4-2 Damped oscillating waves level 3 IEC 61000-4-12 Electrostatic discharge level 3 IEC 61000-4-2 EMC immunity level 3 EN 50082-1 EMC immunity level B EN 50082-2 Harmonics level 3 IEC 1000-3-2 Harmonics level 3 IEC 1000-3-4 Immunity to conducted interference caused by radio-electrical fields level 3 IEC 61000-4-6 Immunity to electrical transients level 4 IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 IEC 61000-4-3 Micro-cuts and voltage fluctuation IEC 61000-4-11 Voltage/current impulse level 3 IEC 61000-4-5
Standards	EN/IEC 60947-4-2
Product Certifications	C-Tick CCC CSA UL GOST
Ip Degree Of Protection	IP20
Pollution Degree	2 EN/IEC 60947-4-2
Vibration Resistance	1 gn 13...150 Hz)EN/IEC 60068-2-6 1.5 mm peak to peak 3...13 Hz)EN/IEC 60068-2-6
Shock Resistance	15 gn 11 ms EN/IEC 60068-2-27
Relative Humidity	5...95 % without condensation or dripping water EN/IEC 60068-2-3
Ambient Air Temperature For Operation	14...104 °F (-10...40 °C) without derating) 104...122 °F (40...50 °C) with current derating of 2 % per °C)

Ambient Air Temperature For Storage	-13...158 °F (-25...70 °C) EN/IEC 60947-4-2
Operating Altitude	<= 1000 m without derating > 1000 m with current derating of 2.2 % per additional 100 m

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	0.98 in (2.5 cm)
Package 1 Width	4.06 in (10.3 cm)
Package 1 Length	4.13 in (10.5 cm)
Package 1 Weight	6.28 oz (178.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	36
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	14.80 lb(US) (6.715 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability





Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


Well-being performance

	Reach Free Of Svhc	
	Toxic Heavy Metal Free	
	Mercury Free	
	Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	

Dimensions Drawings


Dimensions

Mounting on Symetrical (35 mm) Rail or Asymetrical Rail with Adaptor RHZ 66

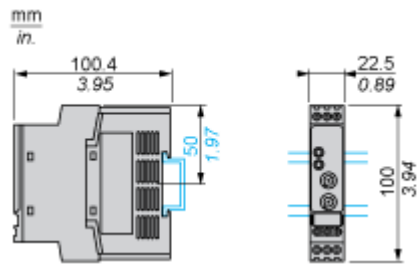

Connections and Schema

Example of 3-phase Power Supply Connection

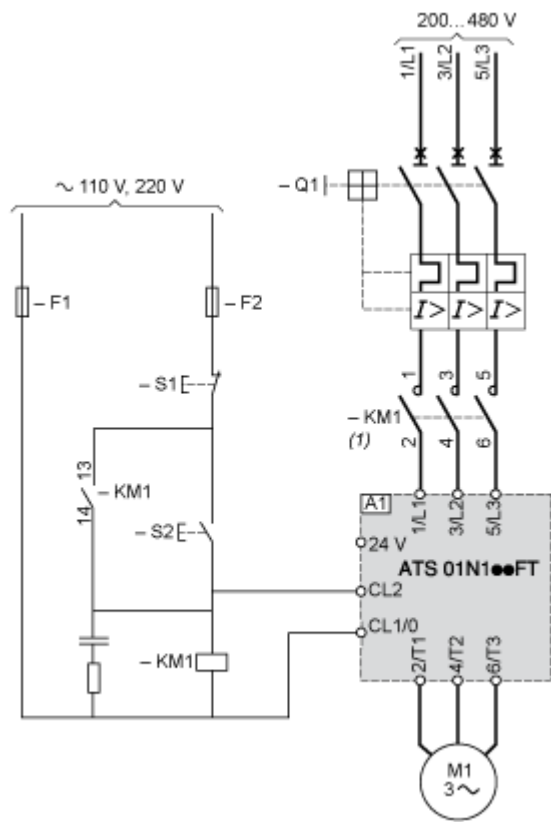

(1) A line contactor must be used in the sequence.

A1 : Soft starter

Q1 : Motor circuit-breaker


KM1 : Contactors

F1, F2 : Control protection fuses

S1, S2 : Pushbuttons

Technical Description

Function Diagram

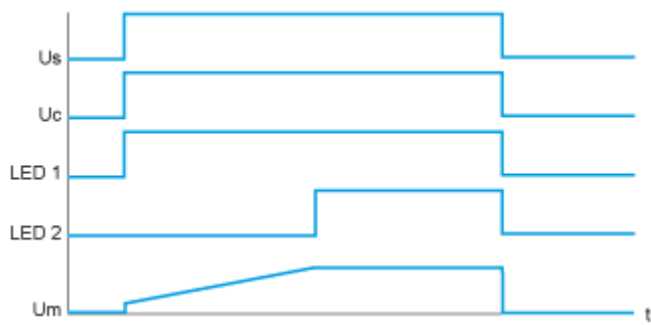

- Us : Power supply voltage
- Uc : Control supply voltage
- LED 1 : Green LED
- LED 2 : Yellow LED
- Um : Motor voltage