Product data sheet

Specification





variable speed drive, Altivar Machine ATV320, 5.5kW, 200 to 240V, 3 phases, compact

ATV320U55M3C

Product availability: Stock - Normally stocked in distribution

Price*: 1,009.20 USD

Main

Range Of Product	Altivar Machine ATV320
Product Or Component Type	Variable speed drive
Product Specific Application	Complex machines
Variant	Standard version
Format Of The Drive	Compact
Mounting Mode	Wall mount
Communication Port Protocol	Modbus serial CANopen
Option Card	communication module, CANopen communication module, EtherCAT communication module, Profibus DP V1 communication module, PROFINET communication module, Ethernet Powerlink communication module, EtherNet/IP communication module, DeviceNet
[Us] Rated Supply Voltage	200240 V - 1510 %
Nominal Output Current	27.5 A
Motor Power Kw	5.5 kW heavy duty
Emc Filter	Without EMC filter
Ip Degree Of Protection	IP20

Complementary

Discrete Input Number	7
Discrete Input Type	STO safe torque off, 24 V DC1.5 kOhm
	DI1DI6 logic inputs, 24 V DC 30 V)
	DI5 programmable as pulse input 030 kHz, 24 V DC 30 V)
Discrete Input Logic	Positive logic (source)
-	Negative logic (sink)
Discrete Output Number	3
Discrete Output Type	Open collector DQ+ 01 kHz 30 V DC 100 mA
	Open collector DQ- 01 kHz 30 V DC 100 mA
Analogue Input Number	3
Analogue Input Type	Al1 voltage 010 V DC 30 kOhm 10 bits
	Al2 bipolar differential voltage +/- 10 V DC 30 kOhm 10 bits
	Al3 current 020 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by
	configuration) 250 Ohm 10 bits
Analogue Output Number	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Relay output R1A, R1B, R1C, R2A, R2C inductive, os pin = 0.47 ms 2 A 30 V DC Relay output R2A, R2C resistive, cos pin = 1 5 A 30 V DC Relay output R2A, R2C resistive, cos pin = 1 5 A 30 V DC Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C 5 ma 24 V DC Method Of Access Slave CANopen 4 Quadrant Operation Possible True Asynchronous Motor Control Profile Voltage/frequency ratio, 5 points Fliux vector control without sensor, standard Voltage/frequency ratio, 5 points Fliux vector control without sensor - Ferrery Saving Voltage/frequency ratio, 2 points Synchronous Motor Control Profile Vector control without sensor Forfile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U S CUS Ramp switching Acceleration deceleration ramp adaptation Acceleration Acceleration deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 25.4 A 200 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Frequen		
Configurable relay logic RT 6 1 NC 100000 cycles Configurable relay logic RT 6 1 NC 100000 cycles Configurable relay logic RZ 6 1 NO 1000000 cycles Configurable relay logic RZ 6 1 NO 1000000 cycles Configurable relay logic RZ 6 1 NO 1000000 cycles Configurable relay logic RZ 6 1 NO 1000000 cycles Configurable relay logic RZ 6 1 NO 1000000 cycles Configurable relay logic RZ 6 Relay output RTA, R1B, R1C R2A, R2C inductive, cos phi = 1 3 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C inductive, cos phi = 0.4 7 ms 2 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C inductive, cos phi = 1 5 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C inductive, cos phi = 0.4 7 ms 2 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C resistive, cos phi = 1 5 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C resistive, cos phi = 1 5 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C resistive, cos phi = 1 5 A 30 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC Relay output RTA, R1B, R1C, R2A, R2C 5 mA 24 V DC R2A, R2C 7 ma 24 X V DC R2A,	Analogue Output Type	
Configurable relay logic RZC Relay output R1A, R1B, R1C resistive, cos phil = 13 A 250 V AC Relay output R1A, R1B, R1C resistive, cos phil = 13 A 30 V DC Relay output R1A, R1B, R1C resistive, cos phil = 13 A 30 V DC Relay output R1A, R1B, R1C, R2A, R2C inductive, cos phil = 0.47 ms 2 A 30 V DC Relay output R2A, R2C resistive, cos phil = 15 A 30 V DC Relay output R2A, R2C resistive, cos phil = 15 A 30 V DC Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C inductive, cos phil = 10.47 ms 2 A 30 V DC Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C os phil = 15 A 30 V DC Method Of Access Slave CANopen 4 Quadrant Operation Possible True Asynchronous Motor Control Profile Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Voltage/frequency ratio, 5 points Flux vector control without sensor - Energy Saving Voltage/frequency ratio, 5 points Synchronous Motor Control Profile Vector control without sensor - Energy Saving Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Profile Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Voltage/frequency ratio, 2 points Synchronous Motor Control Vector control without sensor Voltage/frequency Vo	Relay Output Type	Configurable relay logic R1B 1 NC 100000 cycles
Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phile = 0.4 7 ms 2.4 250 V A Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phile = 0.4 7 ms 2.4 30 V DC Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phile = 0.4 7 ms 2.4 30 V DC Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phile = 1.5 A 30 V DC Relay output R1A, R1B, R1C, R2A, R2C 5 mA 24 V DC Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C 5 mA 24 V DC Method Of Access Slave CANopen 1 True Asynchronous Motor Control Profile Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Voltage/frequency ratio, 5 points Flux vector control without sensor - Energy Saving, outpartic Uff Flux vector control without sensor - Energy Saving Voltage/frequency ratio, 2 points Synchronous Motor Control Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U S CUS Ramp switching Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) 29.8 A 240 V heavy duty) 39.8 A 240 V heavy duty) 39.8 A 240 V heavy duty) 30.8 A 240 V heavy duty) 31.8 A 240 V heavy duty) 32.8 A 240 V heavy duty) 33.8 A 240 V heavy duty) 34.8 A 240 V heavy duty) 35.8 A 240 V heavy duty) 36.8 A 240 V heavy duty) 37.5 A 38.8 A 240 V heavy duty 37.5 A 38.8 A 240 V heavy duty 38.8 A 240 V heavy duty 39.8 A 240 V heavy duty 39.8 A 240 V h		· · · · · · · · · · · · · · · · · · ·
Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phi = 0.4 7 ms 2 A 250 V A Relay output R1A, R1B, R1C, R2A, R2C Inductive, cos phi = 0.4 7 ms 2 A 30 V DC Relay output R2A, R2C resistive, cos phi = 1.5 A 250 V AC Relay output R2A, R2C resistive, cos phi = 1.5 A 250 V AC Relay output R2A, R2C resistive, cos phi = 1.5 A 250 V DC Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C S ma 24 V DC Method Of Access Slave CANopen True Asynchronous Motor Control Voltage/frequency ratio, 5 points Fliux vector control without sensor, standard Voltage/frequency ratio - Energy Saving, quadratic Urf Fliux vector control without sensor - Energy Saving Voltage/frequency ratio - Energy Saving, quadratic Urf Fliux vector control without sensor - Energy Saving Voltage/frequency ratio - Energy Saving Voltage/frequency Synchronous Motor Control Vector control without sensor - Energy Saving Voltage/frequency Vector control without sensor - Energy Saving Voltage/frequency Linear Linear U S S CUS Ramp switching Acceleration And Deceleration Acceleration/deceleration ramp adaptation Acceleration/deceleration ramp adaptation Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) Apparent Power 12.4 kVA 240 V heavy duty) Apparent Power 12.4 kVA 240 V heavy duty) Apparent Power 12.4 kVA 240 V heavy duty) Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fran 242.	Maximum Switching Current	
Minimum Switching Current Relay output R1A, R1B, R1C, R2A, R2C 5 ma 24 V DC Method Of Access Slave CANopen 4 Quadrant Operation Possible True Asynchronous Motor Control Profile Flux vector control without sensor, standard Voltage/frequency ratio, 5 points Flux vector control without sensor - Energy Saving, quadratic Uff Flux vector control without sensor - Energy Saving Voltage/frequency ratio, 2 points Synchronous Motor Control Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U		Relay output R1A, R1B, R1C, R2A, R2C inductive, cos phi = 0.4 7 ms 2 A 250 V AC Relay output R1A, R1B, R1C, R2A, R2C inductive, cos phi = 0.4 7 ms 2 A 30 V DC Relay output R2A, R2C resistive, cos phi = 1 5 A 250 V AC
Method Of Access Slave CANopen 4 Quadrant Operation Possible True Asynchronous Motor Control Profile Asynchronous Motor Control Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Voltage/frequency ratio, 2 points Synchronous Motor Control Profile Profile Profile Translant Overtorque Maximum Output Frequency Acceleration And Deceleration Ramps Cus Cus Ramp switching Acceleration ramp adaptation Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35 4 A 200 V heavy duty) 28 8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation in W Fan 242.0 W 200 V 4 kHz With Safety Function Safety Limited Speed (Sis)	Minimum Switching Current	
4 Quadrant Operation Possible Profile Asynchronous Motor Control Profile Asynchronous Motor Control Profile Asynchronous Motor Control Profile Flux vector control without sensor, standard Voltage/frequency ratio, 2 points Synchronous Motor Control Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U S Ramps witching Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 28.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 40 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safety Limited Speed (Sis)		
Fitax vector control without sensor, standard Voltage/frequency ratio. Energy Saving, quadratic U/f Fitax vector control without sensor. Energy Saving voltage/frequency ratio. 2 points Synchronous Motor Control Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U S CUS Ramp switching Acceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable on John Switching Frequency 216 kHz adjustable in voltage/frequency ratio (2 or 5 points) Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 28.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 40 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload With Safety Function Safely Limited Speed (Sis) False	4 Quadrant Operation Possible	·
Filix vector control without sensor, standard Voltage/frequency ratio. Energy Saving Voltage/frequency ratio. Energy Saving Voltage/frequency ratio. Energy Saving Voltage/frequency ratio. 2 points Synchronous Motor Control Vector control without sensor	Asynchronous Motor Control	Voltage/frequency ratio, 5 points
Synchronous Motor Control Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Ramps Linear U S S CUS Ramp switching Acceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency 102 kHz Relative Symmetric Network 5 % Frequency 70 lerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safey Limited Speed (Sls) With Safety Function Safey Linear U Linear Linear Linear Linear Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Brake Chopin advance in profile acceleration automatic stop wi	Profile	Flux vector control without sensor, standard Voltage/frequency ratio - Energy Saving, quadratic U/f
Profile Transient Overtorque 170200 % of nominal motor torque Maximum Output Frequency 0.599 kHz Acceleration And Deceleration Linear U S S CUS Ramps switching Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safe Brake False With Safety Function Safe Brake False		Voltage/frequency ratio, 2 points
Maximum Output Frequency Acceleration And Deceleration Ramps Linear U S CUS Ramp switching Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Frequency Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safety Limited Speed (Sis) With Safety Function Safe Brake False		Vector control without sensor
Acceleration And Deceleration Ramps Linear U S CUS Ramp switching Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 420 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safety Limited Speed (Sis) With Safety Function Safe Brake False	Transient Overtorque	170200 % of nominal motor torque
Ramps CUS Ramp switching Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sls) With Safety Function Safe Brake False	Maximum Output Frequency	0.599 kHz
CUS Ramp switching Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sls) With Safety Function Safe Brake False		U
Acceleration/deceleration ramp adaptation Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sls) With Safety Function Safe Brake False		
Acceleration/deceleration automatic stop with DC injection Motor Slip Compensation Automatic whatever the load Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sls) With Safety Function Safely Limited Speed (Sls) With Safety Function Safe Brake False		
Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Switching Frequency 216 kHz adjustable 416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sis) With Safety Function Safe Brake False		· ·
416 kHz with derating factor Nominal Switching Frequency 4 kHz Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (Sls) With Safety Function Safe Brake False	Motor Slip Compensation	Adjustable 0300 %
Braking To Standstill By DC injection Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Switching Frequency	•
Brake Chopper Integrated True Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Nominal Switching Frequency	4 kHz
Line Current 35.4 A 200 V heavy duty) 29.8 A 240 V heavy duty) Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Braking To Standstill	By DC injection
Maximum Input Current Per Phase 35.4 A Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network 5 % Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Brake Chopper Integrated	True
Maximum Output Voltage 240 V Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network 5 % Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Line Current	
Apparent Power 12.4 kVA 240 V heavy duty) Network Frequency 50-60 Hz Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Maximum Input Current Per Phase	35.4 A
Network Frequency 50-60 Hz Relative Symmetric Network 5 % Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Maximum Output Voltage	240 V
Relative Symmetric Network Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Apparent Power	12.4 kVA 240 V heavy duty)
Frequency Tolerance Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Network Frequency	50-60 Hz
Prospective Line Isc 22 kA Base Load Current At High 27.5 A Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False		5 %
Overload Power Dissipation In W Fan 242.0 W 200 V 4 kHz With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False	Prospective Line Isc	22 kA
With Safety Function Safely Limited Speed (SIs) With Safety Function Safe Brake False		27.5 A
Limited Speed (SIs) With Safety Function Safe Brake False		Fan 242.0 W 200 V 4 kHz
		True
,	With Safety Function Safe Brake Management (Sbc/Sbt)	False

With Safety Function Safe Operating Stop (Sos)	False
With Safety Function Safe Position (Sp)	False
With Safety Function Safe Programmable Logic	False
With Safety Function Safe Speed Monitor (Ssm)	False
With Safety Function Safe Stop 1 (Ss1)	True
With Sft Fct Safe Stop 2 (Ss2)	False
With Safety Function Safe Torque Off (Sto)	True
With Safety Function Safely Limited Position (SIp)	False
With Safety Function Safe Direction (Sdi)	False
Protection Type	Input phase breaks drive Overcurrent between output phases and earth drive Overheating protection drive Short-circuit between motor phases drive Thermal protection drive
Width	5.91 in (150 mm)
Height	9.13 in (232.0 mm)
Depth	7.01 in (178.0 mm)
Net Weight	7.72 lb(US) (3.5 kg)

Environment

Operating Position	Vertical +/- 10 degree
Product Certifications	CE ATEX NOM GOST EAC RCM KC
Marking	CE ATEX UL CSA EAC RCM
Standards	IEC 61800-5-1
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6 Voltage dips and interruptions immunity test IEC 61000-4-11
Environmental Class (During Operation)	Class 3C3 according to IEC 60721-3-3 Class 3S2 according to IEC 60721-3-3
Maximum Acceleration Under Shock Impact (During Operation)	150 m/s² at 11 ms
Maximum Acceleration Under Vibrational Stress (During Operation)	10 m/s² at 13200 Hz
Maximum Deflection Under Vibratory Load (During Operation)	1.5 mm at 213 Hz
Permitted Relative Humidity (During Operation)	Class 3K5 according to EN 60721-3
Volume Of Cooling Air	15850.61 Gal/hr(US) (60 m3/h)
Overvoltage Category	III

Regulation Loop	Adjustable PID regulator
Speed Accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
Pollution Degree	2
Ambient Air Transport Temperature	-13158 °F (-2570 °C)
Ambient Air Temperature For Operation	14122 °F (-1050 °C) without derating 122140 °F (5060 °C) with derating factor
Ambient Air Temperature For Storage	-13158 °F (-2570 °C)

Ordering and shipping details

Category	US1CP4B22152
Discount Schedule	CP4B
Gtin	3606480966675
Returnability	Yes
Country Of Origin	US

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7.68 in (19.500 cm)
Package 1 Width	8.66 in (22.000 cm)
Package 1 Length	12.99 in (33.000 cm)
Package 1 Weight	9.23 lb(US) (4.185 kg)
Unit Type Of Package 2	P06
Number Of Units In Package 2	10
Package 2 Height	29.53 in (75.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	121.83 lb(US) (55.260 kg)



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Resource performance



Upgraded Components Available

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Dimensions Drawings

Dimensions

Right and Front View


mm in.



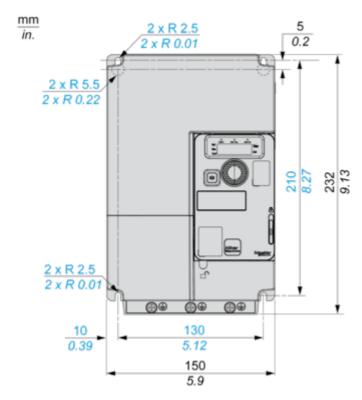


Right and Front View with EMC Plate

 $\frac{\text{mm}}{\text{in.}}$

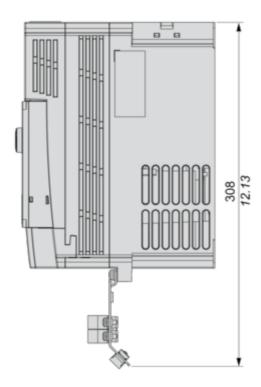


 $\frac{\text{mm}}{\text{in}}$

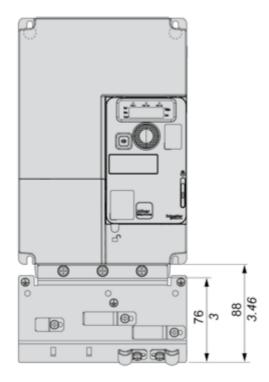

Mounting and Clearance


Mounting Types

Mounting Type A: Individual with Ventilation Cover

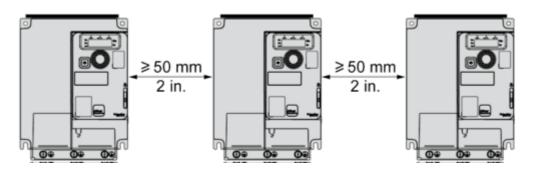


Only Possible at Ambient Temperature Less or Equal to 50 °C (122 °F)

Mounting Type B: Side by Side, Ventilation Cover Removed

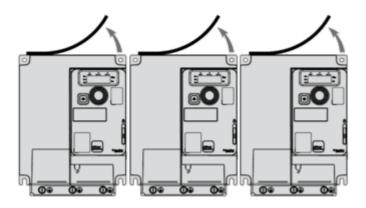

Mounting Type C: Individual, Ventilation Cover Removed

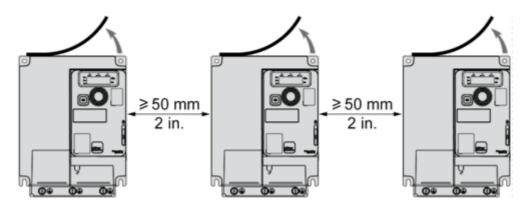

For Operation at Ambient Temperature Above 50 $^{\circ}\text{C}$ (122 $^{\circ}\text{F})$


ATV320U55M3C

Connections and Schema

Connection Diagrams

Diagram with Line Contactor

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

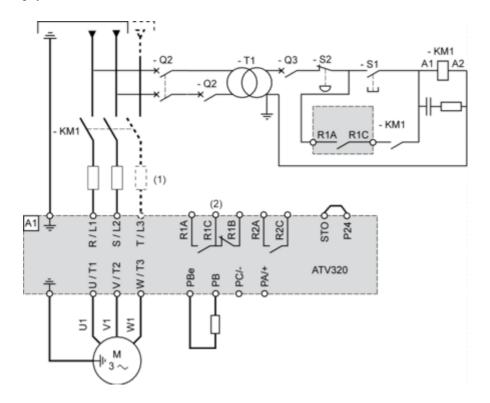


- (1) Line choke (if used)
- (2) Fault relay contacts, for remote signaling of drive status

Diagram with Switch Disconnect


Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

ATV320U55M3C

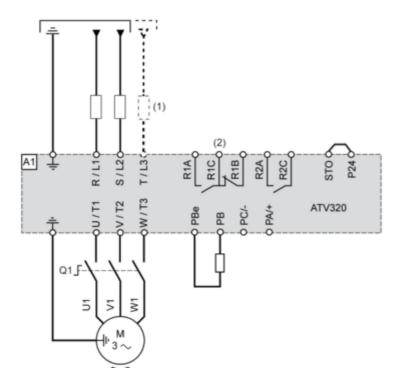

- (1) Line choke (if used)(2) Fault relay contacts, for remote signaling of drive status

Control Connection Diagram in Source Mode

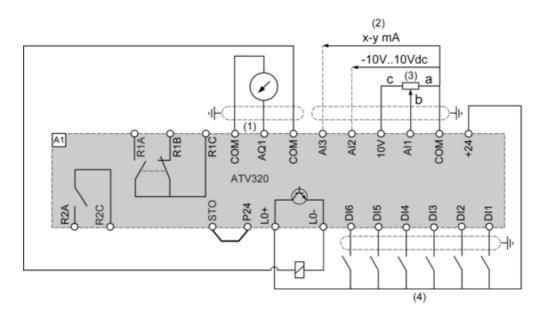


- (1) Analog output
- (2) Analog inputs
- (3) Reference potentiometer (10 kOhm maxi)
- (4) Digital inputs


Digital Inputs Wiring

The logic input switch (SW1) is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.


Switch SW1 set to "Source" position and use of the output power supply for the DIs.

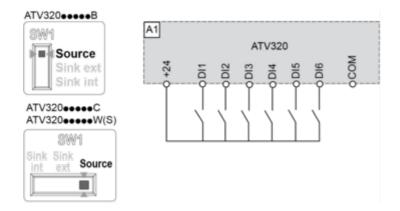

Switch SW1 set to "Source" position and use of an external power supply for the DIs.

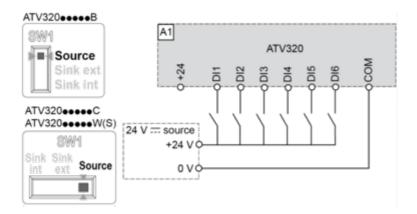


Switch SW1 set to "Sink Int" position and use of the output power supply for the DIs.

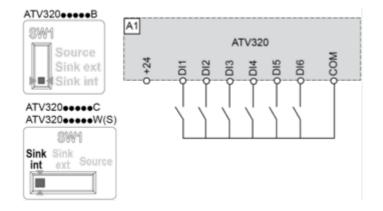

Switch SW1 set to "Sink Ext" position and use of an external power supply for the DIs.


Product data sheet

ATV320U55M3C

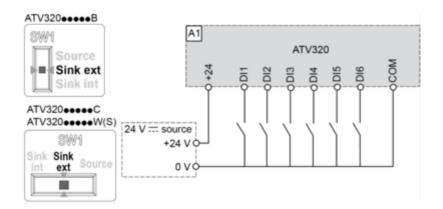

Performance Curves

Derating Curves

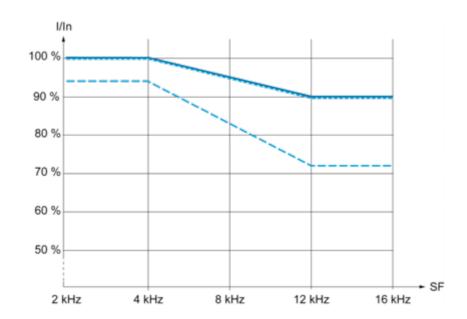

40 °C (104 °F) - Mounting type A, B and C 50 °C (122 °F) - Mounting type C 60 °C (140 °F) - Mounting type C

In: Nominal Drive Current SF: Switching Frequency