Specifications



① Discontinued

Main

mann	
Range Of Product	Zelio Time
Product Or Component Type	Industrial timing relay
Component Name	RE7
Time Delay Type	L Lt Li
Time Delay Range	0.05 s300 h

() Discontinued on: Jun 1, 2016

asymmetrical flashing relay - 0.05..1

s - 24 V AC DC - 10C

RE7CV11BU

Complementary

Relay
90/10 silver nickel contacts
0.89 in (22.5 mm)
110240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz 4248 V AC/DC 50/60 Hz
0.851.1 Us
Screw terminals, 2 x 1.5 mm² flexible with cable end Screw terminals, 2 x 2.5 mm² flexible without cable end
5.319.74 lbf.in (0.61.1 N.m)
+/- 10 % of full scale
+/- 0.2 %
< 0.07 %/°C
< 0.2 %/V
20 ms
50 ms
250 V AC/DC
2000000 cycles
8 A
2 A DC-13 24 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.1 A DC-13 250 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.2 A DC-13 115 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 3 A AC-15 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660
10 mA 12 V

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Input Voltage	< 60 V X1Z2
	< 60 V X2Z2
Maximum Switching Current	1 mA X1Z2)
	1 mA X2Z2)
Input Compatibility	3/4 wires sensors PNP/NPN without internal load <164.04 ft (50 m) X1Z2
	3/4 wires sensors PNP/NPN without internal load <164.04 ft (50 m) X2Z2
Potentiometer Characteristic	Linear 47 kOhm +/- 20 %), 0.2 W 82.02 ft (25 m) Z1Z2
Marking	CE
Overvoltage Category	III IEC 60664-1
[Ui] Rated Insulation Voltage	250 V between contact circuit and control inputs IEC
	250 V between contact circuit and power supply IEC
	300 V between contact circuit and control inputs CSA
	300 V between contact circuit and power supply CSA
Supply Disconnection Value	> 0.1 Uc
Operating Position	Any position without derating
Surge Withstand	2 kV IEC 61000-4-5 level 3
Power Consumption In Va	0.7 VA 24 V
	1.6 VA 48 V
	1.8 VA 110 V
	8.5 VA 240 V
Maximum Power Consumption In	0.5 W 24 V
W	1.2 W 48 V
Terminal Description	(B1-A2)CO
	ALT
	(15-16-18)OC_OFF
Height	3.07 in (78 mm)
Width	0.89 in (22.5 mm)
Depth	3.15 in (80 mm)
Net Weight	0.33 lb(US) (0.15 kg)

Environment

Immunity To Microbreaks	3 ms
Standards	EN/IEC 61812-1
Product Certifications	UL CSA GL
Ambient Air Temperature For Storage	-40185 °F (-4085 °C)
Ambient Air Temperature For Operation	-4140 °F (-2060 °C)
Relative Humidity	1585 % 3K3 IEC 60721-3-3
Vibration Resistance	0.35 mm 1055 Hz)IEC 60068-2-6
Shock Resistance	15 gn 11 ms IEC 60068-2-27
Ip Degree Of Protection	IP20 terminals) IP50 housing)
Pollution Degree	3 IEC 60664-1
Dielectric Strength	2.5 kV
Non-Dissipating Shock Wave	4.8 kV
Resistance To Electrostatic Discharge	6 kV in contact IEC 61000-4-2 level 3 8 kV in air IEC 61000-4-2 level 3

Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) IEC 61000-4-3 level 3
Resistance To Fast Transients	2 kV IEC 61000-4-4 level 3
Disturbance Radiated/Conducted	CISPR 22 - class A

CISPR 11 group 1 - class A

Ordering and shipping details

Category	22376-RELAYS-MEASUREMENT(RM4)
Discount Schedule	CP2
Gtin	00785901481416
Returnability	No
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

Contractual warranty


Warranty

18 months


Dimensions Drawings

Width 22.5 mm

Rail Mounting

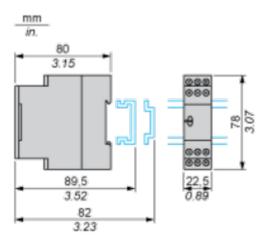

Screw Fixing




Connections and Schema

Internal Wiring Diagram

A1 Z1	15 Z3	B1 B2
<u>19</u>	<u>۶</u>	15
R	<u>و</u> ر –	l∎ T
X1	X2	Z2
18	16	A2

Recommended Application Wiring Diagram

Selection of Starting Phase






2 12...48 V

3 24 V

6 Start during the On-delay period: X2, Z2 linked.Start during the Off-delay period: X2, Z2 not linked.


Control of Several Relays

Control of several relays with a single external control contact

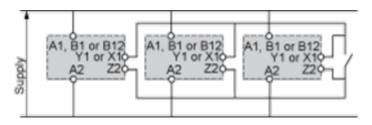


RE7CV11BU

Connection of an External Control Contact Without Using Terminal Z2



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection 3-Wire NPN or PNP Sensor




Connection 3-Wire NPN or PNP Sensor Without Using Terminal Z2

Connection NPN




It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection PNP



It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection of Potentiometer



7 Off-delay adjustment (tr) (contact 15/16 closed).8 On-delay adjustment (ta) (contact 15/18 closed).


Connection Precautions



UNEXPECTED EQUIPMENT OPERATION

No galvanic isolation between supply terminals and control inputs.

Failure to follow these instructions can result in death, serious injury, or equipment damage.




Performance Curves

Performance Curves

A.C. Load Curve 1

Electrical durability of contacts on resistive loading millions of operating cycles

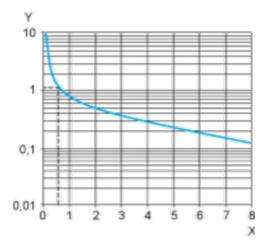


X Current broken in A

Y Millions of operating cycles

A.C. Load Curve 2


Reduction factor k for inductive loads (applies to values taken from durability curve 1).




X Power factor on breaking (cos ϕ)

Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For $\cos \phi = 0.3$: k = 0.6 The electrical durability therefore becomes:1.5 10^6 operating cycles x 0.6 = 900 000 operating cycles.



D. C. Load Limit Curve

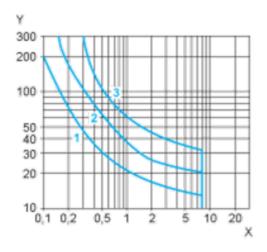

X Current in A

Y Voltage in V

- **1** L/R = 20 ms
- 2 L/R with load protection diode

3 Resistive load


Technical Description

Function L : Asymmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle comprises of two, independently adjustable timing periods Ta and Tr. Each timing period corresponds to a different state of the output R.

Function: 1 Output



Function Li : Asymmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle comprises of two, independently adjustable timing periods Ta and Tr. Each timing period corresponds to a different state of the output R.

Function: 1 Output



RE7CV11BU


Function Lt: Asymmetrical Flashing with Partial Stop of Timing

Description

Repetitive cycle comprises of two, independently adjustable timing periods Ta and Tr. Each timing period corresponds to a different state of the output R.

Gate control contact G can be operated to partially stop timing periods Ta and Tr.

Function: 1 Output



Tr = t1 + t2 + ... Ta = t'1 + t'2 +...

Legend

	Relay de-energised
	Relay energised
	Output open
	Output closed
с	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
т	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply