Specifications



() Discontinued

N

Main	
Range Of Product	Zelio Time
Product Or Component Type	Industrial timing relay
Contacts Type And Composition	2 C/O
Component Name	RE7
Time Delay Type	Qt A C H Qg W D D Di

time delay relay 8 functions - 0.05..1

s - 24 V AC DC - 20C

() Discontinued on: Jan 23, 2021

RE7MY13BU

Time Delay Range

0.05 s...300 h

Complementary

Discrete Output Type	Relay
Contacts Material	90/10 silver nickel contacts
Width Pitch Dimension	0.89 in (22.5 mm)
[Us] Rated Supply Voltage	110240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz 4248 V AC/DC 50/60 Hz
Voltage Range	0.851.1 Us
Connections - Terminals	Screw terminals, 2 x 1.5 mm² flexible with cable end Screw terminals, 2 x 2.5 mm² flexible without cable end
Tightening Torque	5.319.74 lbf.in (0.61.1 N.m)
Setting Accuracy Of Time Delay	+/- 10 % of full scale
Repeat Accuracy	+/- 0.2 %
Temperature Drift	< 0.07 %/°C
Voltage Drift	< 0.2 %/V
Minimum Pulse Duration	20 ms
Reset Time	50 ms
Maximum Switching Voltage	250 V AC/DC
Mechanical Durability	20000000 cycles
[Ith] Conventional Free Air Thermal Current	8 A

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Maximum [le] Rated Operational Current	2 A DC-13 24 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.1 A DC-13 250 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.2 A DC-13 115 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 3 A AC-15 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660
Minimum Switching Capacity	10 mA 12 V
Input Voltage	< 60 V Y1Z2
Maximum Switching Current	1 mA Y1Z2)
Input Compatibility	3/4 wires sensors PNP/NPN without internal load <164.04 ft (50 m) Y1Z2
Potentiometer Characteristic	Linear 47 kOhm +/- 20 %), 0.2 W 82.02 ft (25 m) Z1Z2
Marking	CE
Overvoltage Category	III IEC 60664-1
[Ui] Rated Insulation Voltage	250 V between contact circuit and control inputs IEC250 V between contact circuit and power supply IEC300 V between contact circuit and control inputs CSA300 V between contact circuit and power supply CSA
Supply Disconnection Value	> 0.1 Uc
Operating Position	Any position without derating
Surge Withstand	2 kV IEC 61000-4-5 level 3
Power Consumption In Va	2 VA 48 V 1.2 VA 24 V 12.5 VA 240 V 2.8 VA 110 V
Maximum Power Consumption In W	0.8 W 24 V 1.6 W 48 V
Terminal Description	ALT (Z2)UNUSED (B1-A2)CO (15-16-18)OC (25-26-28)OC (Y1)UNUSED (Z1)UNUSED
Height	3.07 in (78 mm)
Width	0.89 in (22.5 mm)
Depth	3.15 in (80 mm)
Net Weight	0.33 lb(US) (0.15 kg)

Environment

Immunity To Microbreaks	3 ms
Standards	EN/IEC 61812-1
Product Certifications	UL CSA GL
Ambient Air Temperature For Storage	-40185 °F (-4085 °C)
Ambient Air Temperature For Operation	-4140 °F (-2060 °C)
Relative Humidity	1585 % 3K3 IEC 60721-3-3
Vibration Resistance	0.35 mm 1055 Hz)IEC 60068-2-6
Shock Resistance	15 gn 11 ms IEC 60068-2-27
Ip Degree Of Protection	IP20 terminals) IP50 housing)
Pollution Degree	3 IEC 60664-1

Dielectric Strength	2.5 kV
Non-Dissipating Shock Wave	4.8 kV
Resistance To Electrostatic Discharge	6 kV in contact IEC 61000-4-2 level 3 8 kV in air IEC 61000-4-2 level 3
Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) IEC 61000-4-3 level 3
Resistance To Fast Transients	2 kV IEC 61000-4-4 level 3
Disturbance Radiated/Conducted	CISPR 11 group 1 - class A CISPR 22 - class A

Ordering and shipping details

Discount Schedule	070
	CP2
Gtin	00785901708902
Returnability	No
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

Contractual warranty


Warranty

18 months


Dimensions Drawings

Width 22.5 mm

Rail Mounting

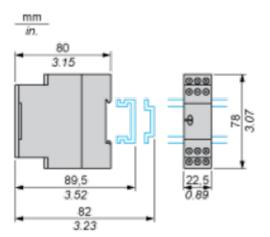

Screw Fixing




Connections and Schema

Internal Wiring Diagram

A1 Z1	15 25 (21)	B1 Y1
테	15	(21)
۲.	9 9 9 9 9	3333
28 (24)	26 (22)	Z2
18	16	A2

Recommended Application Wiring Diagram

Start on Energisation




1 Supply 2 12...48 V 3 24 V

Life Is On Schneider

Recommended Application Wiring Diagram


Start by External Control



1 Supply 2 12...48 V 3 24 V

Recommended Application Wiring Diagram


External Control of Partial Stop




1 Supply 2 12...48 V 3 24 V

Control of Several Relays

Control of several relays with a single external control contact

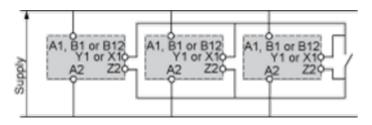


Connection of an External Control Contact Without Using Terminal Z2



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection 3-Wire NPN or PNP Sensor




Connection 3-Wire NPN or PNP Sensor Without Using Terminal Z2

Connection NPN




It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection PNP



It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection of Potentiometer




Connection Precautions



UNEXPECTED EQUIPMENT OPERATION

No galvanic isolation between supply terminals and control inputs.

Failure to follow these instructions can result in death, serious injury, or equipment damage.




Performance Curves

Performance Curves

A.C. Load Curve 1

Electrical durability of contacts on resistive loading millions of operating cycles

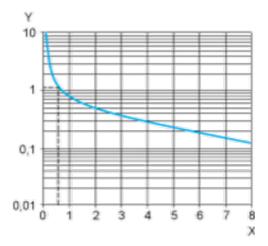


X Current broken in A

Y Millions of operating cycles

A.C. Load Curve 2


Reduction factor k for inductive loads (applies to values taken from durability curve 1).




X Power factor on breaking (cos ϕ)

Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For $\cos \phi = 0.3$: k = 0.6 The electrical durability therefore becomes:1.5 10^6 operating cycles x 0.6 = 900 000 operating cycles.



D. C. Load Limit Curve

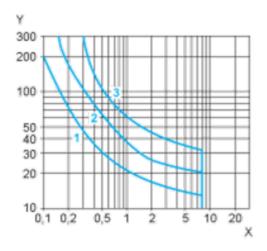

X Current in A

Y Voltage in V

- **1** L/R = 20 ms
- 2 L/R with load protection diode

3 Resistive load

Technical Description

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description


Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Function Di : Symmetrical Flasher Relay (Starting Pulse On)

Description


Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Function H : Interval Relay


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function Qg: Star-Delta Timing

Description

Timing for star-delta starter with contact for switching to star connection.

Function: 1 Output




Function Qt: Star-Delta Timing

Description

Timing for star-delta starter with double On-delay period.

Function: 1 Output




Function W : Interval Relay with Control Signal Off


Description

After power-up and opening of the control contact, the output(s) close(s) for a timing period T. At the end of this timing period the output(s) revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Legend

	Relay de-energised
	Relay energised
	Output open
	Output closed
с	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
т	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply