

controller, Modicon MCM, 8 inputs 2 outputs, monitors expansion modules, screw

XPSMCMCP0802

Product availability: Stock - Normally stocked in distribution facility

Price*: 576.00 USD

Main

| Range Of Product | Modicon Safety automation | |
|--|---|--|
| Product Or Component Type | Safety controller CPU | |
| Device Short Name | XPSMCM | |
| Electrical Connection | Screw terminal | |
| [Us] Rated Supply Voltage | 24 V - 2020 % DC | |
| Number Of Inputs | 8 digital input connection 2 digital interlock start/restart or external device monitoring | |
| Number Of Outputs | safety outputs OSSD contactor/drive connection test line control outputs configurable diagnostic connection | |
| Discrete Input Voltage | 24 V | |
| Discrete Output Current | 400 mA | |
| Discrete Input Current | 400 mA | |
| Discrete Input Type | Safety input PNP | |
| Discrete Output Type | PNP | |
| Function Of Module Emergency stop EN/ISO 13850 Guard monitoring EN/ISO 14119 Enabling switch monitoring EN/IEC 60947-5-1 Light curtain monitoring EN/IEC 61496-1 Foot switch monitoring EN/IEC 60947-5-1 Magnetic switch monitoring EN/ISO 14119 Two-hand control EN 574 Safety mat monitoring EN/ISO 14119 Enabling switch monitoring EN 61326-1 Muting function of light curtains EN/IEC 60947-5-1 Counter functions EN/IEC 61800-5-2 Speed monitoring EN/IEC 61800-5-2 | | |

Complementary

| Synchronisation Time Between Inputs | < 0.5 ms |
|---|---|
| Power Dissipation In W | 3 W |
| Maximum Number Of I/O Expansion Module | 14 128 input 14 16 output |
| Integrated Connection Type | Backplane expansion bus USB 2.0 port |
| Data Storage Equipment | SD card optional) |
| Inductive Load | 30 mH |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| 0.82 μF | |
|---|--|
| Can reach category 4 EN/ISO 13849-1 | |
| Can reach PL = e EN/ISO 13849-1 Type 4 EN/IEC 61496-1 | |
| SILCL 3 IEC 62061 | |
| CE | |
| 1 LED green PWR power ON | |
| 1 LED green RUN RUN (status) | |
| 1 LED red E IN internal error 1 LED red E EX external error | |
| 1 LED orange COM communication | |
| 1 LED blue EN master enable | |
| 8 LEDs yellow IN input status | |
| 2 LEDs green/red OUT output status | |
| 2 LEDs yellow RST restart signal | |
| 2 LEDs yellow STATUS output channel | |
| captive screw terminals, removable terminal block captive screw terminals, removable terminal block | |
| 0.000.00 in² (0.21.5 mm²) - AWG 24AWG 16 flexible without cable end | |
| 0.000.00 in² (0.22.5 mm²) - AWG 24AWG 14 flexible without cable end | |
| 0.000.00 in² (0.251 mm²) - AWG 23AWG 18 flexible with cable end, without | |
| bezel | |
| 0.000.00 in² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, with bezel | |
| 0.000.00 in² (0.251.5 mm²) - AWG 23AWG 16 flexible with cable end, without | |
| bezel | |
| 0.000.00 in² (0.51.5 mm²) - AWG 20AWG 16 flexible with cable end, with | |
| double bezel 0.00 | |
| 0.000.00 in² (0.21 mm²) - AWG 24AWG 18 solid without cable end 0.000.00 in² (0.22.5 mm²) - AWG 24AWG 14 solid without cable end | |
| Omega 35 mm DIN rail EN 50022 | |
| 4.51 in (114.5 mm) | |
| 3.90 in (99 mm) | |
| 0.89 in (22.5 mm) | |
| 0.55 lb(US) (0.25 kg) | |
| | |
| EN/IEC 61508 | |
| EN/ISO 13849-1 | |
| EN/IEC 61496-1 | |
| EN/IEC 61800-5-1 | |
| IEC 62061 | |
| cULus | |
| RCM | |
| TÜV | |
| IP20 | |
| 14131 °F (-1055 °C) | |
| -4185 °F (-2085 °C) | |
| 1095 % | |
| 2 | |
| 4 kV EN/IEC 61800-5-1 | |
| PFHd = 6.06E-9 1/h | |
| DC > 99 % MTTFd < 100 years high | |
| 250 V AC between power supply and housing EN/IEC 61800-5-1 | |
| 200 v no between power supply and nousing EIV/IEC 01000-3-1 | |
| II . | |
| | |

| Electromagnetic Compatibility | Electrostatic discharge immunity test - test level: 6 kV (on contact) conforming to EN/ IEC 61000-4-2 Electrostatic discharge immunity test - test level: 20 kV (on air) conforming to EN/IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (801000 MHz) conforming to EN/IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 30 V/m (1.4 GHz2 GHz) conforming to EN/IEC 61000-4-3 |
|-------------------------------|---|
| Vibration Resistance | +/-0.35 mm 1055 Hz)EN/IEC 61496-1 |
| Shock Resistance | 10 gn 16 ms) 1000 shocks on each axis EN/IEC 61496-1 |
| Service Life | 20 year(s) |

Ordering and shipping details

| Category | US1SAF222477 |
|-------------------|---------------|
| Discount Schedule | SAF2 |
| Gtin | 3606480748561 |
| Returnability | Yes |
| Country Of Origin | IT |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|-------------------------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 1.77 in (4.500 cm) |
| Package 1 Width | 4.92 in (12.500 cm) |
| Package 1 Length | 6.50 in (16.500 cm) |
| Package 1 Weight | 8.78 oz (249.000 g) |
| Unit Type Of Package 2 | S03 |
| Number Of Units In Package 2 | 26 |
| Package 2 Height | 11.81 in (30.000 cm) |
| Package 2 Width | 11.81 in (30.000 cm) |
| Package 2 Length | 15.75 in (40.000 cm) |
| Package 2 Weight | 15.23 lb(US) (6.908 kg) |

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >


Well-being performance

| Reach | Free Of Svhc | |
|-------------|-----------------------|---|
| ✓ Mercur | y Free | |
| Rohs E | exemption Information | Yes |
| ✓ Pvc Free | ee | |
| | | |
| Reach Regu | llation | REACh Declaration |
| Eu Rohs Dir | ective | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs | Regulation | China RoHS declaration |
| Weee | | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| (| | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

Dimensions Drawings

Dimensions

Screw Terminal

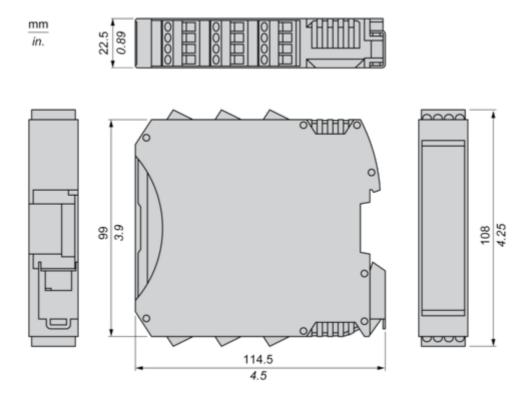



XPSMCMCP0802

Mounting and Clearance

Mounting Safety Controller CPU with Module(s)

Mount BackPlane Connector on Rail








- 1 : Connect as much Backplane Connector as module to be install.
- 2 : Fix the connectors to the rail (Top first).

Mount Safety Controller CPU with Other Module(s)








- 1 : Mount controller CPU and modules on rail.
- ${\bf 2}: {\sf Make \ sure \ that \ the \ controller \ CPU \ or \ the \ module(s) \ are \ plugged \ on \ the \ BackPlane \ connector.}$

XPSMCMCP0802

Connections and Schema

Wiring

Terminal Designation

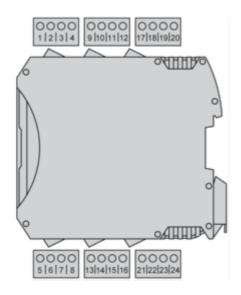


| Terminal | Signal | Description | |
|----------|----------------|-------------------------------|--|
| 1 | 24 VDC | 24 Vdc power supply | |
| 2 | MASTER_ENABLE1 | Master enable 1 | |
| 3 | MASTER_ENABLE2 | Master enable 2 | |
| 4 | 0 VDC | 0 Vdc power supply | |
| 5 | OSSD1_A | Statio output 1 | |
| 6 | OSSD1_B | Static output 1 | |
| 7 | RESTART1 | Feedback/Restart 1 | |
| 8 | OUT_STATUS 1 | Programmable digital output | |
| 9 | OSSD2_A | Statio autout 2 | |
| 10 | OSSD2_B | Static output 2 | |
| 11 | RESTART2 | Feedback/Restart 2 | |
| 12 | OUT_STATUS 2 | Programmable digital output | |
| 13 | OUT_TEST1 | | |
| 14 | OUT_TEST2 | Short aircuit datastad autaut | |
| 15 | OUT_TEST3 | Short circuit detected output | |
| 16 | OUT_TEST4 | | |

XPSMCMCP0802

| Terminal | Signal | Description |
|----------|--------|-----------------|
| 17 | INPUT1 | Digital input 1 |
| 18 | INPUT2 | Digital input 2 |
| 19 | INPUT3 | Digital input 3 |
| 20 | INPUT4 | Digital input 4 |
| 21 | INPUT5 | Digital input 5 |
| 22 | INPUT6 | Digital input 6 |
| 23 | INPUT7 | Digital input 7 |
| 24 | INPUT8 | Digital input 8 |

Wiring Example

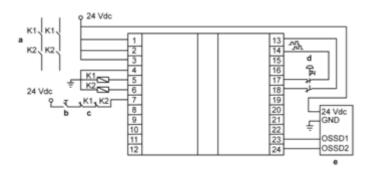

a : Contactorsb : Restartc : Feedbackd : Emergency stope : Light curtain