Specifications



variable speed drive, Altivar Machine ATV320, 1.5kW, 380 to 500V, 3 phases, enclosed, IP65

ATV320U15N4WS

Main

Range Of Product	Altivar Machine ATV320
Product Or Component Type	Variable speed drive
Product Specific Application	Complex machines
Variant	With disconnect switch
Format Of The Drive	Enclosed
Mounting Mode	Wall mount
Communication Port Protocol	Modbus serial CANopen
Option Card	Communication module, CANopen Communication module, EtherCAT Communication module, Profibus DP V1 Communication module, PROFINET Communication module, Ethernet Powerlink Communication module, EtherNet/IP Communication module, DeviceNet
[Us] Rated Supply Voltage	380500 V - 1510 %
Nominal Output Current	4.1 A
Motor Power Kw	1.5 kW for heavy duty
Emc Filter	Class C2 EMC filter integrated
Ip Degree Of Protection	IP65

Complementary

Discrete Input Number	7
Discrete Input Type	STO safe torque off, 24 V DC, impedance: 1.5 kOhm DI1DI6 logic inputs, 24 V DC (30 V) DI5 programmable as pulse input: 030 kHz, 24 V DC (30 V)
Discrete Input Logic	Positive logic (source) Negative logic (sink)
Discrete Output Number	3
Discrete Output Type	Open collector DQ+ 01 kHz 30 V DC 100 mA Open collector DQ- 01 kHz 30 V DC 100 mA
Analogue Input Number	3
Analogue Input Type	Al1 voltage: 010 V DC, impedance: 30 kOhm, resolution 10 bits Al2 bipolar differential voltage: +/- 10 V DC, impedance: 30 kOhm, resolution 10 bits Al3 current: 020 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by configuration), impedance: 250 Ohm, resolution 10 bits
Analogue Output Number	1

ware-configurable current AQ1: 020 mA impedance 800 Ohm, resolution 10 ware-configurable voltage AQ1: 010 V DC impedance 470 Ohm, resolution 10 figurable relay logic R1A 1 NO electrical durability 100000 cycles figurable relay logic R1B 1 NC electrical durability 100000 cycles figurable relay logic R1C figurable relay logic R2A 1 NO electrical durability 100000 cycles figurable relay logic R2A 1 NO electrical durability 100000 cycles figurable relay logic R2C ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 250 V AC ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 30 V DC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 30 V DC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC
figurable relay logic R1B 1 NC electrical durability 100000 cycles figurable relay logic R1C figurable relay logic R2A 1 NO electrical durability 100000 cycles figurable relay logic R2C ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 250 V AC ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 30 V DC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC re CANopen age/frequency ratio, 5 points
figurable relay logic R2A 1 NO electrical durability 100000 cycles figurable relay logic R2C ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 250 V AC ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 30 V DC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC re CANopen age/frequency ratio, 5 points
ay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 2 A at 30 V DC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC re CANopen age/frequency ratio, 5 points
ay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC re CANopen age/frequency ratio, 5 points
age/frequency ratio, 5 points
age/frequency ratio, 5 points
vector control without sensor, standard age/frequency ratio - Energy Saving, quadratic U/f vector control without sensor - Energy Saving age/frequency ratio, 2 points
tor control without sensor
200 % of nominal motor torque
9 kHz
ar p switching eleration/deceleration ramp adaptation eleration/deceleration automatic stop with DC injection
omatic whatever the load istable 0300 % available in voltage/frequency ratio (2 or 5 points)
6 kHz adjustable 6 kHz with derating factor
Iz
DC injection
A at 380 V (heavy duty) A at 500 V (heavy duty)
A
V
<va (heavy="" 500="" at="" duty)<="" td="" v=""></va>
60 Hz
х
4
-cooled: 56.0 W at 380 V, switching frequency 4 kHz
3

With Safety Function Safe Brake Management (Sbc/Sbt)	False
With Safety Function Safe Operating Stop (Sos)	False
With Safety Function Safe Position (Sp)	False
With Safety Function Safe Programmable Logic	False
With Safety Function Safe Speed Monitor (Ssm)	False
With Safety Function Safe Stop 1 (Ss1)	True
With Sft Fct Safe Stop 2 (Ss2)	False
With Safety Function Safe Torque Off (Sto)	True
With Safety Function Safely Limited Position (Slp)	False
With Safety Function Safe Direction (Sdi)	False
Protection Type	Input phase breaks: drive Overcurrent between output phases and earth: drive Overheating protection: drive Short-circuit between motor phases: drive Thermal protection: drive
Width	250 mm
Width Height	
	250 mm

Environment

Operating Position	Vertical +/- 10 degree
Product Certifications	CE
	ATEX
	NOM
	GOST
	EAC
	RCM
	КС
Marking	CE
	ATEX
	UL
	CSA
	EAC
	RCM
Standards	IEC 61800-5-1
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3
	Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4
	1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5
	Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6
	Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Environmental Class (During	Class 3C3 according to IEC 60721-3-3
Operation)	Class 3S2 according to IEC 60721-3-3
Maximum Acceleration Under Shock Impact (During Operation)	150 m/s² at 11 ms
Maximum Acceleration Under Vibrational Stress (During Operation)	10 m/s² at 13200 Hz
Maximum Deflection Under Vibratory Load (During Operation)	1.5 mm at 213 Hz
Permitted Relative Humidity	Class 3K5 according to EN 60721-3

Overvoltage Category	III
Regulation Loop	Adjustable PID regulator
Speed Accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
Pollution Degree	3
Ambient Air Transport Temperature	-2570 °C
Ambient Air Temperature For Operation	-1040 °C without derating 4060 °C with derating factor
Ambient Air Temperature For Storage	-2570 °C

Packing Units

-	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	25.8 cm
Package 1 Width	30.5 cm
Package 1 Length	45.0 cm
Package 1 Weight	8.4 kg
Unit Type Of Package 2	S06
Number Of Units In Package 2	4
Package 2 Height	73.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	46.6 kg

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Eà

Transparency RoHS/REACh

Resource performance

Upgraded Components Available

Well-being performance

Mercury Free

Rohs Exemption Information Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
weee Circularity Profile	


Dimensions Drawings

Dimensions

Front and Left View

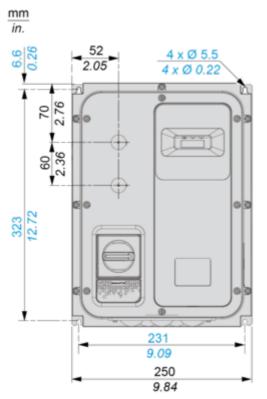




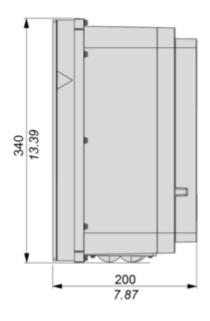

Mounting and Clearance

Mounting and Clearance

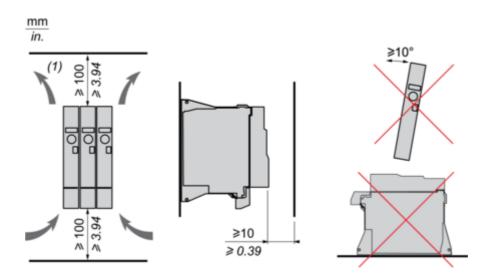

(1) Minimum value corresponding to thermal constraints.


ATV320U15N4WS

Connections and Schema

Connection Diagrams

Diagram with Line Contactor

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

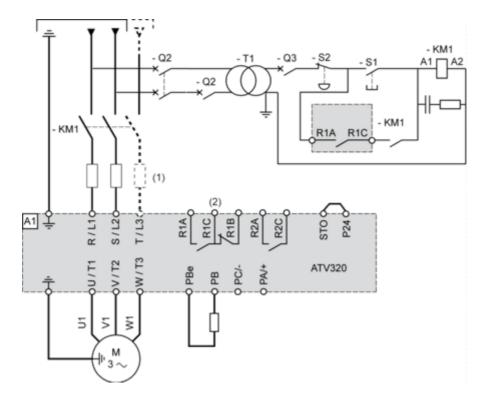


(1) Line choke (if used)

(2) Fault relay contacts, for remote signaling of drive status


Diagram with Switch Disconnect

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

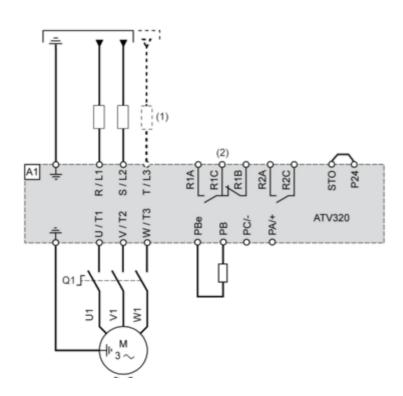

(1) Line choke (if used)(2) Fault relay contacts, for remote signaling of drive status

Control Connection Diagram in Source Mode

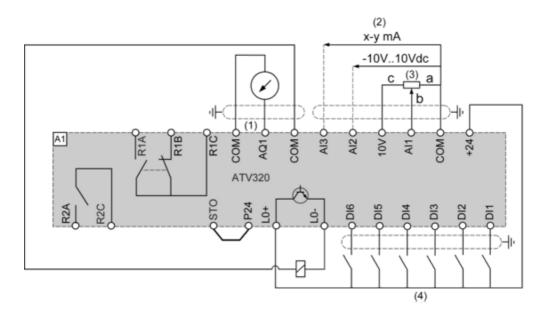

(1) Analog output


- (2) Analog inputs
- (3) Reference potentiometer (10 kOhm maxi)
- (4) Digital inputs

ATV320U15N4WS


Digital Inputs Wiring

The logic input switch (SW1) is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.


Switch SW1 set to "Source" position and use of the output power supply for the DIs.

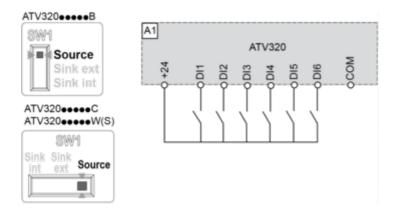


Switch SW1 set to "Source" position and use of an external power supply for the DIs.

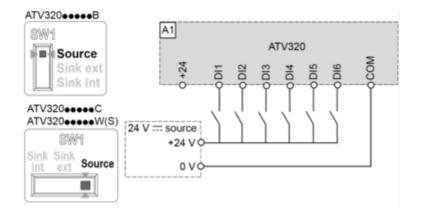

Switch SW1 set to "Sink Int" position and use of the output power supply for the DIs.

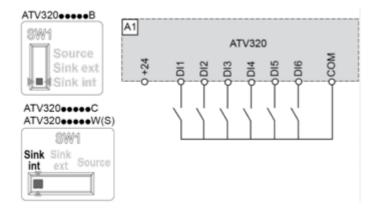

Switch SW1 set to "Sink Ext" position and use of an external power supply for the DIs.

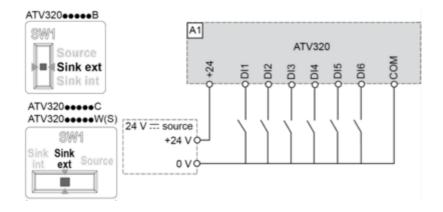

12