



(!) Discontinued

kw - 200 V - 1 phase - with heat sink

ATV32HU15M2

! Discontinued on: 31 Dec 2017

variable speed drive ATV32 - 1.5

! End-of-service on: 31 Dec 2018

Price: 13,827.27 ZAR

## Main

Range Of Product	Altivar 32
Product Or Component Type	Variable speed drive
Product Destination	Asynchronous motors Synchronous motors
Product Specific Application	Complex machines
Function Available	-
Assembly Style	With heat sink
Component Name	ATV32
Emc Filter	Class C2 EMC filter integrated
Network Number Of Phases	1 phase
[Us] Rated Supply Voltage	200240 V - 1510 %
Supply Voltage Limits	170264 V
Supply Frequency	5060 Hz - 55 %
Network Frequency	47.563 Hz
Motor Power Kw	1.5 kW at 200240 V
Motor Power Hp	2 hp at 200240 V

## Complementary

Line Current	14.8 A for 240 V 1 phase 1.5 kW / 2 hp 17.6 A for 200 V 1 phase 1.5 kW / 2 hp
Apparent Power	3.6 kVA at 240 V 1 phase 1.5 kW / 2 hp
Prospective Line Isc	1 kA for 1 phase
Nominal Output Current	8 A at 4 kHz 240 V 1.5 kW / 2 hp
Maximum Transient Current	12 A for 60 s 1.5 kW / 2 hp
Output Frequency	0.00050.599 kHz
Nominal Switching Frequency	4 kHz
Switching Frequency	216 kHz adjustable
Speed Range	1100 for asynchronous motor in open-loop mode
Speed Accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
Torque Accuracy	+/- 15 %

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Transient Overtorque	170200 %
Braking Torque	<= 170 % with braking resistor
Asynchronous Motor Control Profile	Voltage/frequency ratio, 5 points Flux vector control without sensor, standard Voltage/frequency ratio, 2 points
	Voltage/frequency ratio - Energy Saving, quadratic U/f Flux vector control without sensor - Energy Saving, NoLoad law
Synchronous Motor Control Profile	Vector control without sensor
Regulation Loop	Adjustable PID regulator
Motor Slip Compensation	Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points) Automatic whatever the load
Local Signalling	1 LED red for drive voltage 1 LED green for CANopen run 1 LED red for CANopen error 1 LED red for drive fault
Output Voltage	<= power supply voltage
Noise Level	43 dB conforming to 86/188/EEC
Insulation	Electrical between power and control
Electrical Connection	Screw terminal, clamping capacity: 0.51.5 mm², AWG 18AWG 14 (control) Removable screw terminals, clamping capacity: 1.52.5 mm², AWG 14AWG 12 (motor/braking resistor)  Screw terminal, clamping capacity: 2.54 mm², AWG 12AWG 10 (power supply)
Fightening Torque	0.5 N.m, 4.4 lb/ft (control) 0.7 N.m, 7.1 lb/ft (motor/braking resistor) 0.6 N.m, 5.3 lb/ft (power supply)
Supply	Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection
Analogue Input Number	3
Analogue Input Type	Al1 voltage: 010 V DC, impedance: 30000 Ohm, resolution 10 bits Al2 bipolar differential voltage: +/- 10 V DC, impedance: 30000 Ohm, resolution 10 bits Al3 current: 020 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by configuration), impedance: 250 Ohm, resolution 10 bits
Sampling Duration	2 ms (Al1, Al2, Al3) - analog input(s) 2 ms (AO1) - analog input(s)
Response Time	LI1LI6 8 ms, tolerance +/- 0.7 ms for logic output(s) R1A, R1B, R1C 2 ms for relay output(s) R2A, R2C 2 ms for relay output(s)
Accuracy	+/- 0.2 % (Al1, Al2, Al3) for a temperature of -1060 °C +/- 0.5 % (Al1, Al2, Al3) for a temperature of 25 °C +/- 1 % (AO1) for a temperature of 25 °C +/- 2 % (AO1) for a temperature of -1060 °C
inearity Error	+/- 0.20.5 % of maximum value (Al1, Al2, Al3) +/- 0.3 % (AO1)
Analogue Output Number	1
Analogue Output Type	AO1 software-configurable current 020 mA, impedance: 800 Ohm, resolution 10 bits AO1 software-configurable voltage 010 V, impedance: 470 Ohm, resolution 10 bits
Discrete Output Number	3
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles Logic: (LO)
Minimum Switching Current	5 mA at 24 V DC for configurable relay logic

Maximum Switching Current	R1: 3 A at 250 V AC resistive load, cos phi = 1 R1: 4 A at 30 V DC resistive load, cos phi = 1 R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 R2: 5 A at 250 V AC resistive load, cos phi = 1 R2: 5 A at 30 V DC resistive load, cos phi = 1
Discrete Input Number	7
Discrete Input Type	Programmable (sink/source) (LI1LI4)2430 V DC, with level 1 PLC Programmable as pulse input 20 kpps (LI5)2430 V DC, with level 1 PLC Switch-configurable PTC probe (LI6)2430 V DC Safe torque off (STO)2430 V DC - 1500 Ohm
Discrete Input Logic	Negative logic (sink) (LI1LI6), > 19 V (state 0), < 13 V (state 1) Positive logic (source) (LI1LI6), < 5 V (state 0), > 11 V (state 1)
Acceleration And Deceleration Ramps	Ramp switching CUS S Deceleration ramp automatic stop DC injection Linear Deceleration ramp adaptation U
Braking To Standstill	By DC injection
Protection Type	Input phase breaks: drive Overcurrent between output phases and earth: drive Overheating protection: drive Short-circuit between motor phases: drive Thermal protection: drive
Communication Port Protocol	CANopen Modbus
Connector Type	1 RJ45 (on front face) for Modbus/CANopen
Physical Interface	2-wire RS 485 for Modbus
Transmission Frame	RTU for Modbus
Type Of Polarization	No impedance for Modbus
Number Of Addresses	1127 for CANopen 1247 for Modbus
Method Of Access	Slave CANopen
Electromagnetic Compatibility	1.2/50 µs - 8/20 µs surge immunity test, level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test, level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test, level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test, level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test, level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Width	60 mm
Height	325 mm
Depth	245 mm
Net Weight	2.9 kg
Option Card	Communication card for CANopen daisy chain Communication card for CANopen open style Communication card for DeviceNet Communication card for EtherNet/IP Communication card for Profibus DP V1

## **Environment**

Standards EN 61800-3 environments 2 category C2

EN/IEC 61800-5-1

EN 61800-3 environments 1 category C2

EN/IEC 61800-3 EN 55011 class A group 1

Product Certifications	UL GOST NOM 117 CSA C-Tick
Marking	CE
Pollution Degree	2 conforming to EN/IEC 61800-5-1
Ip Degree Of Protection	IP20 conforming to EN/IEC 61800-5-1
Vibration Resistance	1 gn (f = 13200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f = 313 Hz) conforming to EN/IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3
Ambient Air Temperature For Operation	-1050 °C without derating 5060 °C with derating factor
Ambient Air Temperature For Storage	-2570 °C
Operating Altitude	<= 1000 m without derating 10002000 m with current derating 1 % per 100 m
Operating Position	Vertical +/- 10 degree

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

# Well-being performance



Mercury Free



Rohs Exemption Information

Yes


### **Certifications & Standards**

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

### **Dimensions Drawings**


# Size B

#### **Dimensions**

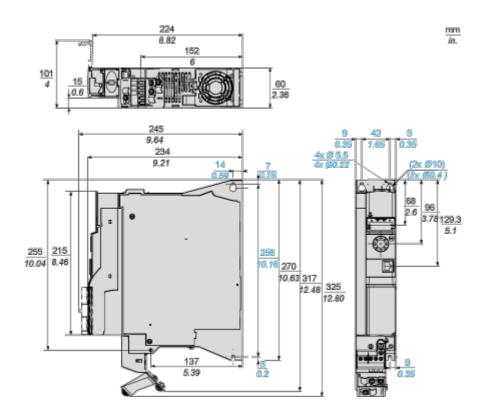

## Mounting and Clearance

### **Mounting and Clearance**

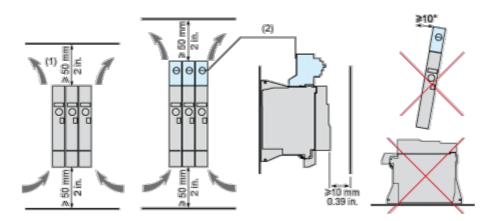


- (1) Minimum value corresponding to thermal constraints. A 150 mm clearance may help to connect the ground.
- (2) Optional GV2 circuit-breaker

### Option: Protection Device, GV2 circuit-breaker

The drive is prepared to be equipped with an optional GV2 circuit-breaker.

The GV2 circuit-breaker is directly mounted on the drive. Mechanical and electrical link are made using the optional adapter. The options are supplied with detailed mounting instruction sheet.

NOTE: The product overall dimension, including GV2 adapter and EMC plate mounted, becomes 424 mm (16.7 in.)

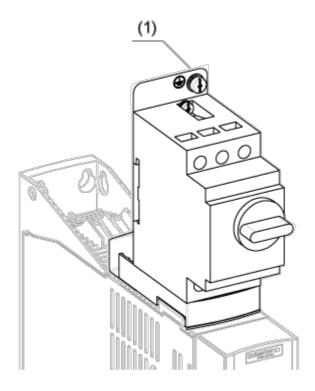


(1) Ground screw (HS type 2 - 5x12)

#### Connections and Schema

#### **Connection Diagrams**

### Single or Three-phase Power Supply - Diagram with Line Contactor


Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

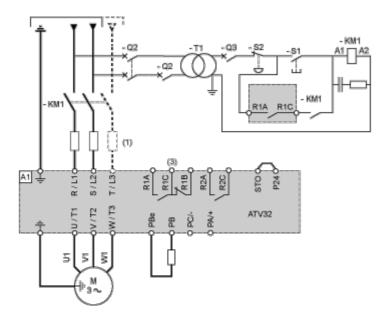

- (1) Line choke (if used)
- (3) Fault relay contacts, for remote signaling of drive status

#### Single or Three-phase Power Supply - Diagram with Switch Disconnect

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.



- (1) Line choke (if used)
- (3) Fault relay contacts, for remote signaling of drive status


#### Diagram with Preventa Safety Module (Safe Torque Off Function)

#### ATV32HU15M2

Connection diagrams conforming to standards EN 954-1 category 3 and IEC/EN 61508 capacity SIL2, stopping category 0 in accordance with standard IEC/EN 60204-1.

When the emergency stop is activated, the drive power supply is cut immediately and the motor stops in freewheel, according to category 0 of standard IEC/EN 60204-1.

A contact on the Preventa XPS AC module must be inserted in the brake control circuit to engage it safely when the STO (Safe Torque Off) safety function is activated.

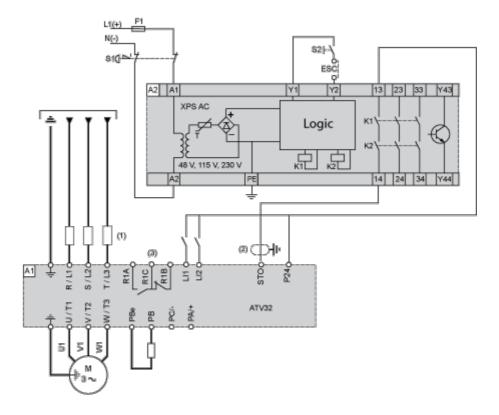

- (1) Line choke (if used)
- (2) It is essential to connect the shielding to the ground.
- (3) Fault relay contacts, for remote signaling of drive status

The STO safety function integrated into the product can be used to implement an "EMERGENCY STOP" (IEC 60204-1) for category 0 stops.

With an additional, approved EMERGENCY STOP module, it is also possible to implement category 1 stops.

#### STO function

The STO safety function is triggered via 2 redundant inputs. The circuits of the two inputs must be separate so that there are always two channels. The switching process must be simultaneous for both inputs (offset < 1 s).

The power stage is disabled and an error message is generated. The motor can no longer generate torque and coasts down without braking. A restart is possible after resetting the error message with a "Fault Reset".

The power stage is disabled and an error message is generated if only one of the two inputs is switched off or if the time offset is too great. This error message can only be reset by switching off the product.


#### **Diagram without Preventa Safety Module**

Connection diagrams conforming to standards EN 954-1 category 2 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

The connection diagram below is suitable for use with machines with a short freewheel stop time (machines with low inertia or high resistive torque).

When the emergency stop is activated, the drive power supply is cut immediately and the motor stops in freewheel, according to category 0 of standard IEC/EN 60204-1.


# ATV32HU15M2

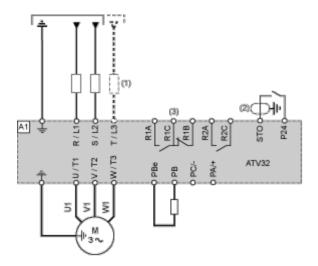

- (1) Line choke (if used)
- (2) It is essential to connect the shielding to the ground.
- (3) Fault relay contacts, for remote signaling of drive status

The STO safety function integrated into the product can be used to implement an "EMERGENCY STOP" (IEC 60204-1) for category 0 stops.

## **Control Connection Diagram in Source Mode**

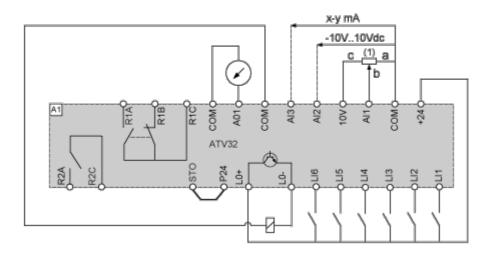


(1) Reference potentiometer SZ1RV1202 (2.2 k $\Omega$ ) or similar (10 k $\Omega$  maximum)

## ATV32HU15M2

#### Performance Curves

#### **Derating Curves**

Derating curve for the nominal drive current (In) as a function of temperature and switching frequency.

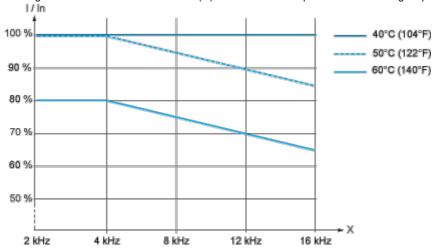

X Switching frequency


Above 4 kHz, the drive will reduce the switching frequency automatically in the event of an excessive temperature rise.

#### **Technical Description**


#### Sink / Source Switch Configuration (SW1)

The logic input switch (SW1) is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.


Switch SW1 set to "Source" position



Switch SW1 set to "Source" position and use of an external power supply for the LIs



Switch SW1 set to "Sink Int" position



Switch SW1 set to "Sink Ext" position

