# **Product datasheet**

Specification





# Unity Hot Standby processor with single mode Ethernet - 11 MB - 266 MHz

140CPU67861

! Discontinued on: 9 July 2018

! To be end-of-service on: 31 Dec 2026

## ① Discontinued - Service only

## Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	Unity processor

## Complementary

Mode Of Transmission	Single mode
Clock Frequency	266 MHz
Number Of Slots	10
	16
	4
	6
	2
Number Of Racks	2 - local rack(s)
Number Of Distributed I/O Station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number Of Remote I/O Station	31 - 2 rack(s) per S908 remote I/O
	31 - 2 rack(s) per ethernet Quantum remote I/O
	31 - 2 rack(s) per ethernet X80 remote I/O
Discrete I/O Number	31744 inputs, 31744 outputs - remote
	8000 inputs, 8000 outputs - distributed - per network Modbus Plus
	Unlimited (31 drops of 28 slots max) - ethernet remote I/O
	0 - local - forbidden in Hot Standby application
Analogue I/O Number	500 inputs, 500 outputs - distributed - per network Modbus Plus
_	Unlimited (31 drops of 28 slots max) - ethernet remote I/O
	1984 inputs,1984 outputs - remote
	0 - local - forbidden in Hot Standby application
Application Specific I/O	Serial link
	High-speed interrupt inputs
	Accurate time stamping
	Counter
Communication Service	Ethernet router
Number Of Optional Modules	6 (Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum Number Of	1 USB
Connections	2 AS-Interface - distributed
	4 AS-Interface - remote
	6 Ethernet TCP/IP - local
	6 Modbus Plus - local
	6 Profibus DP - local
	1 Modbus (RS232/485 Modbus/ASCII)
Integrated Connection Type	1 Modbus Plus with
	1 Modbus with
	1 USB with

26 Apr 2024 Life Is On Schneider

1 optic fibre with Hot Standby



Checks	Hot standby Process control
Memory Description	Expandable 8 MB - file storage with PCMCIA card Internal RAM 11264 kB - 1536 kB for data
Switch Function	Key switch memory port on/off
Application Structure	1 periodic fast task - forbidden in Hot Standby application 128 I/O interrupt tasks - forbidden in Hot Standby application 128 interrupt tasks - forbidden in Hot Standby application 32 timer interrupt tasks - forbidden in Hot Standby application 4 auxiliary tasks - forbidden in Hot Standby application 1 cyclic/periodic master task -
Number Of Instructions Per Ms	10.28 Kinst/ms 100 % Boolean 10.07 Kinst/ms 65 % Boolean and 35 % numerical
System Overhead	0.2 ms for fast task 1 ms for master task
Bus Current Requirement	2760 mA
Local Signalling	1 LED (green) for Ethernet activity (COM) 1 LED (red) for Ethernet collision
Electrical Connection	1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network     1 connector, connector type: RJ45 for connecting Modbus bus     1 connector, connector type: LC (single mode fiber optic) for interconnecting primary and secondary PLCs up to 16 km

## **Environment**

Protective Treatment	Conformal coating Humiseal 1A33
Product Certifications	UL
	CE
	CSA
	GOST
	Misc (Marine)
Standards	Hazi oc

## **Packing Units**

_	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	11.0 cm
Package 1 Width	18.5 cm
Package 1 Length	32.5 cm
Package 1 Weight	1.424 kg
Unit Type Of Package 2	S04
Number Of Units In Package 2	6
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	8.544 kg



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

#### **Certifications & Standards**

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


**EU RoHS Declaration** 

Circularity Profile End of Life Information

### **Dimensions Drawings**

## **Racks for Modules Mounting**

#### **Dimensions of Modules and Racks**

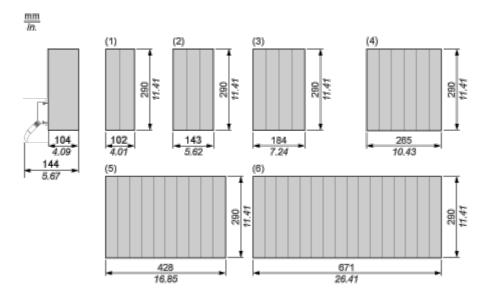

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots