Product datasheet

Specifications





Quantum RIO Drop E/IP 1CH

140CRA31200

Main

Range Of Product	Modicon Quantum	
Product Or Component Type	Ethernet RIO drop adaptor	
Number Of Port	3	
Integrated Connection Type	Ethernet IP/Modbus TCP for service port Ethernet IP/Modbus TCP for device network	
Communication Port Protocol	Ethernet IP/Modbus TCP	
Communication Service	The input data are collected and published to the remote I/O head adaptor Output modules are updated with the data received from remote I/O head adaptor	

Complementary

Тороlоду	Daisy chain loop
Local Signalling	1 LED (green/red) for module status (Mod Status) 1 LED (green/red) for network communication status (Net Status) 1 LED (green) for RUN 1 LED (red) for I/O
Product Compatibility	140CRP31200
Environmental Characteristic	Standard environment Hazardous location class I division 2 conforming to EN/IEC 61131-1
Width	167 mm
Height	50 mm
Net Weight	0.554 kg

Environment

Product Certifications	CE UL 508 C-Tick
Standards	IEC 55011 CSA C22.2 No 142 IEC 61000-4-16
Ip Degree Of Protection	IP20 conforming to IEC 61131-2 IP20 conforming to IEC 60527
Overvoltage Category	Class I conforming to IEC 61131-2
Ambient Air Temperature For Operation	060 °C conforming to IEC 60068-2-2 060 °C conforming to IEC 60068-2-2
Ambient Air Temperature For Storage	-4085 °C conforming to IEC 60068-2-2 -4085 °C conforming to IEC 60068-2-2
Vibration Resistance	3.5 mm constant amplitude (f= 0.58.4 Hz) conforming to IEC 61131-2 1 gn constant acceleration (f= 8.4150 Hz) conforming to IEC 61131-2

Operating Altitude	2000 m
Maximum Altitude Transport	3000 m
Relative Humidity	93 % conforming to IEC 60068

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.900 cm
Package 1 Width	16.400 cm
Package 1 Length	31.300 cm
Package 1 Weight	593.000 g
Unit Type Of Package 2	\$03
Number Of Units In Package 2	7
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.650 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

Reach Free Of Svhc

Mercury Free

Rohs Exemption Information Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

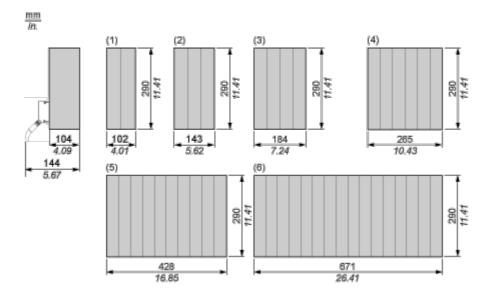

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots