Product datasheet

Specifications

Main





Ethernet network TCP/IP module - class C30 - FactoryCast configurable

140NOE77111C

! To be discontinued on: 31 Dec 2029

! To be end-of-service on: 31 Dec 2029

Discontinued - Service on

Mairi		
Range Of Product	Modicon Quantum automation platform	
Product Or Component Type	Ethernet network TCP/IP module	
Concept	Transparent Ready	
Web Server	Class C30	
Web Services	Data editor Rack viewer FactoryCast configurable	
Communication Service	Modbus TCP messaging SNMP network management Bandwidth management NTP time synchronization SMTP e-mail notification FDR server I/O scanning Global Data	
Communication Port Protocol	nunication Port Protocol Ethernet Modbus TCP/IP	
Physical Interface	MT/RJ - 100BASE-FX fiber optic RJ45 - 10BASE-T/100BASE-TX twisted pair	
Transmission Rate	10/100 Mbit/s	

Complementary

Redundancy	Yes hot standby redundant architecture	
Supply	Via the power supply of the rack	
Marking	CE	
Local Signalling	1 LED for 10 Mbps or 100 Mbps data rate (10 MB/100 MB)	
	1 LED for collision detection (Coll)	
	1 LED for download mode (Kernel)	
	1 LED for Ethernet module fault (Fault)	
	1 LED for Ethernet network status (RUN)	
	1 LED for full-duplex mode (Fduplex)	
	1 LED for module ready (Ready)	
	1 LED for network active (Link)	
	1 LED for rack operational (Active)	
	1 LED for transmission/reception activity (TxAct/RxAct)	
Current Consumption	750 mA at 5 V DC	
Module Format	Standard	
Net Weight	0.345 kg	

Environment

Ip Degree Of Protection	IP20	
Product Certifications	cUL UL 508	
Standards	CSA C22.2 No 142 FM Class 1 Division 2	
Protective Treatment	Conformal coating Humiseal 1A33	
Resistance To Electrostatic Discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2	
Resistance To Electromagnetic Fields	10 V/m 801000 MHz conforming to IEC 801-3	
Ambient Air Temperature For Operation	060 °C	
Ambient Air Temperature For Storage	-4085 °C	
Relative Humidity	95 % without condensation	
Operating Altitude	<= 4500 m	

Packing Units

•	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.0 cm
Package 1 Width	16.5 cm
Package 1 Length	31.0 cm
Package 1 Weight	599.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	7
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.593 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

②	Reach Free Of Svhc	
Ø	Mercury Free	
Ø	Rohs Exemption Information	Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

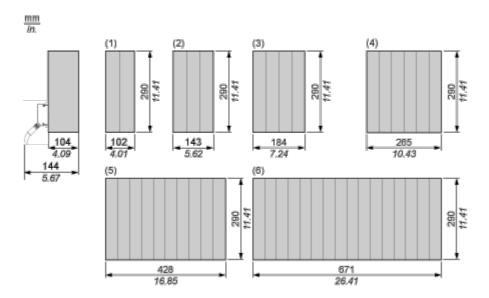

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots