# **Product datasheet**

Specifications





Harmony XB5, Antimicrobial Flush mounted push button head, plastic, recessed, green, Ø30, spring return, unmarked, dark grey bezel

ZB5FA36

#### Main

| Range Of Product                | Harmony XB5                          |
|---------------------------------|--------------------------------------|
| Product Or Component Type       | Head for non-illuminated push-button |
| Device Short Name               | ZB5                                  |
| Product Compatibility           | ZBYF<br>ZBZF32<br>ZBZF33<br>ZB5AZ    |
| Bezel Material                  | Dark grey plastic                    |
| Mounting Diameter               | 30.5 mm                              |
| Head Type                       | Built-in-flush                       |
| Sale Per Indivisible Quantity   | 1                                    |
| Shape Of Signaling Unit Head    | Round                                |
| Type Of Operator                | spring return                        |
| Operator Profile                | Green recessed, unmarked             |
| Operator Additional Information | High guard                           |

## Complementary

| Cad Overall Width           | 37 mm  |  |
|-----------------------------|--|--|
| Cad Overall Height          | 37 mm  |  |
| Cad Overall Depth           | 30 mm  |  |
| Net Weight                  | 0.03 kg  |  |
| Mechanical Durability       | rability 10000000 cycles   |  |
| Electrical Composition Code | C1 for <9 contacts using single blocks in front mounting C2 for <9 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting SF1 for <3 contacts using single blocks in front mounting |  |

#### **Environment**

| Protective Treatment                     | TH                               |
|--|----------------------------------|
| Ambient Air Temperature For Storage      | -4070 °C                         |
| Ambient Air Temperature For<br>Operation | -4070 °C                         |
| Overvoltage Category                     | Class II conforming to IEC 60536 |

| Ip Degree Of Protection               | IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 IP69 conforming to IEC 60529 IP69K conforming to ISO 20653 Type 13 conforming to UL 50 E Type 12 conforming to UL 50 E Type 4 conforming to UL 50 E Type 4X conforming to UL 50 E                   |
|---------------------------------------|---|
| Resistance To High Pressure<br>Washer | 7000000 Pa at 55 °C, distance : 0.1 m   |
| Ik Degree Of Protection               | IK03 conforming to IEC 50102  |
| Standards                             | EN/IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14<br>JIS C8201-5-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-1<br>JIS C8201-1   |
| Product Certifications                | UL listed LROS (Lloyds register of shipping) CSA GL BV DNV  |
| Shock Resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 25 gn (duration = 6 ms) for 1000 shocks on each axis conforming to IEC 60068-2-27 |
| Vibration Resistance                  | 5 gn (f= 10500 Hz) conforming to IEC 60068-2-6<br>2 mm peak to peak (f= 210 Hz) conforming to IEC 60068-2-6   |

# **Packing Units**

| Unit Type Of Package 1       | PCE     |
|------------------------------|---------|
| Number Of Units In Package 1 | 1       |
| Package 1 Height             | 5.45 cm |
| Package 1 Width              | 4.3 cm  |
| Package 1 Length             | 5.2 cm  |
| Package 1 Weight             | 22.0 g  |

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance


| <b>⊘</b> | Reach Free Of Svhc         |     |
|----------|----------------------------|-----|
| <b>⊘</b> | Mercury Free               |     |
| <b>⊘</b> | Rohs Exemption Information | Yes |

#### **Certifications & Standards**

| Reach Regulation         | REACh Declaration  |
|--------------------------|--|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs Regulation    | China RoHS declaration                                     |
| Environmental Disclosure | Product Environmental Profile                              |
| Circularity Profile      | End of Life Information                                    |

#### **Dimensions Drawings**

#### **Dimensions**

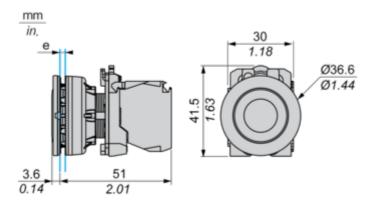


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

### ZB5FA36

#### Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

#### Connection by Screw Clamp Terminals or Plug-in Connectors



(1) Diameter on finished panel or support

(2) Ø30.75 mm recommended (Ø30.5  $_0^{+0.5}$ ) / Ø1.21 in. recommended (Ø1.20 in.  $_0^{+0.0196}$ )

| <b>o</b>                                      |         |          |         | 0        |
|---|---------|----------|---------|----------|
| Connections                                   | a in mm | a in in. | b in mm | b in in. |
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 40      | 1.57     |
| By Faston connectors                          | 45      | 1.77     | 40      | 1.57     |

25 Apr 2024

## ZB5FA36

**Technical Description** 

**Electrical Composition Corresponding to Code C1** 



**Electrical Composition Corresponding to Code C2** 



**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1** 



# ZB5FA36

#### **Electrical Composition Corresponding to Code C15**

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



#### Legend

Single contact



Double contact



Light block



Possible location

