

Product data sheet

Specifications



gearbox straight teeth GBX,
Lexium, 60mm, reduction 10:1 ,
10arc.min, 15N.m

GBX060010K

Main

Range Compatibility	Lexium 62 Lexium 28 Lexium 62 ILM Lexium 52 Lexium 32
Product Or Component Type	Planetary gearbox
Gear Box Type	Straight teeth
Device Short Name	GBX
Product Compatibility	BMH 2.76 in (70 mm), 1 BSH 2.17 in (55 mm), 1 BSH 2.17 in (55 mm), 3 BSH 2.76 in (70 mm), 1 BCH2 2.36 in (60 mm), 1 SH3 MH3 ILM
Gearbox External Diameter	2.36 in (60 mm)
Reduction Ratio	10:1

Complementary

Maximum Torsional Backlash	10 arc.min
Torsional Rigidity	2.3 N.m/arcmin
Housing Colour	Black
Housing Material	Black anodized aluminium
Shaft Material	C 45
Additional Information	Lubricated for life
Service Life In Hours	30000 h 100 rpm 86 °F (30 °C)
Mounting Position	Any position
Efficiency	96 %
Maximum Radial Force Fr	340 N 100 rpm, force applied at mid-distance from output shaft during 30000 hour at 30 °C
Maximum Axial Force Fa	450 N 100 rpm, during 30000 hour at 30 °C
Moment Of Inertia	0.064 kg.cm ²
Continuous Output Torque	132.76 lbf.in (15 N.m) 100 rpm 86 °F (30 °C)
Maximum Output Torque	212.42 lbf.in (24 N.m) 100 rpm 86 °F (30 °C)
Net Weight	1.98 lb(US) (0.9 kg)
Input Diameter	0.55 in (14.0 mm)

Environment

Noise Level	58 dB 1 m, no-load
Ip Degree Of Protection	Shaft output IP54
Ambient Temperature For Operation	-13...194 °F (-25...90 °C)

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.92 in (12.5 cm)
Package 1 Width	2.76 in (7.0 cm)
Package 1 Length	2.76 in (7.0 cm)
Package 1 Weight	29.35 oz (832.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	5
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	10.17 lb(US) (4.615 kg)

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Mercury Free

Rohs Exemption Information Yes

Pvc Free

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Product out of China RoHS scope. Substance declaration for your information

Environmental Disclosure


[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions Drawings

Dimensions with Servo Motor Adaptation Kit

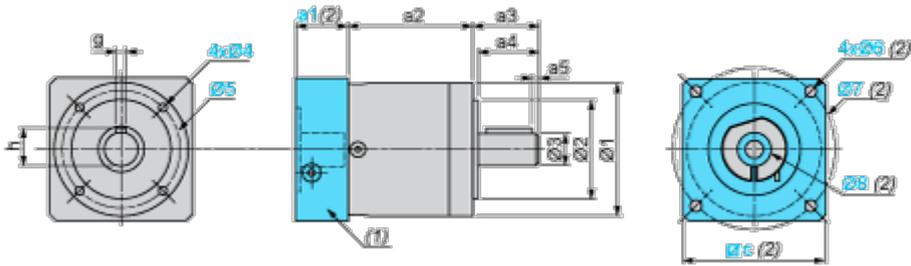

- (1) GBK adaptation kit
- (2) GBK adaptation kit related dimensions a1, c, Ø6, Ø7, Ø8 depend on the gearbox and servo motor combination
- Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
55	35	30	2.5	16	5	60	40 h7	14 h7	M5 x 8	52

Values in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
2.16	1.38	1.18	0.10	063	0.19	2.36	1.57 h7	0.55 h7	M5 x 0.31	2.05