Product data sheet

Specification





Touch panel screen, Harmony STO & STU, 3"4 monochrome W/P/R for Zelio

HMISTO501

! Discontinued on: Jan 26, 2021



Main

Range Of Product	Harmony STO & STU
Product Or Component Type	Touch panel screen
Software Designation	Vijeo Designer
Operating System	Harmony
Processor Name	CPU RISC

Complementary

3.4 inch				
Backlit monochrome STN LCD				
White, pink and red				
200 x 80 pixels				
Analogue				
10000 hours red 50000 hours pink 50000 hours white				
8 levels				
16 levels via touch panel				
Korean Japanese (ANK, Kanji) Taiwanese (traditional Chinese) Chinese (simplified Chinese) ASCII				
24 V DC +/- 20 %				
30 A				
Normal operation 1 LED green)				
5 W				
Limited by internal memory capacity				
333 MHz				
Application memory 16 MB Back up of data 128 kB				
1 USB 2.0 type mini B 1 USB 2.0 type A power supply - removable screw terminal block serial link - 9-pin terminal block - RS232C				
External source				

Realtime Clock	Access to the PLC real-time clock			
Downloadable Protocols	Zelio			
Range Compatibility	Zelio Logic			
Fixing Mode	By 2 spring clips 1.65 mm thick panel			
Enclosure Material	PPT			
Marking	CE			

Environment

Immunity To Microbreaks	3 ms				
Standards	IEC 61000-6-2 FCC Class A UL 508				
	UL 1604 EN 61131-2				
Product Certifications	CE UL Class 1 Division 2 T5 UL Class 1 Division 2 T4A C-Tick cULus				
Ambient Air Temperature For Operation	32122 °F (050 °C)				
Ambient Air Temperature For Storage	-4140 °F (-2060 °C)				
Relative Humidity	090 % without condensation				
Operating Altitude	<= 2000 m				
lp Degree Of Protection	IP20 IEC 60529 rear panel) IP65 IEC 60529 front panel)				
Nema Degree Of Protection	NEMA 4X front panel indoor use)				
Shock Resistance	15 gn 11 msIEC 60068-2-27				
Vibration Resistance	+/- 3.5 mm 59 Hz) IEC 60068-2-6 1 gn 9150 Hz) IEC 60068-2-6				
Electromagnetic Compatibility	Resistance to radiated electromagnetic fields - test level: 10 V/m conforming to 61000-4-3				

Packing Units

Unit Type Of Package 1	PCE				
Number Of Units In Package 1	1				
Package 1 Height	3.35 in (8.5 cm)				
Package 1 Width	5.12 in (13.0 cm)				
Package 1 Length	7.48 in (19.0 cm)				
Package 1 Weight	13.47 oz (382.0 g)				
Unit Type Of Package 2	S03				
Number Of Units In Package 2	12				
Package 2 Height	11.81 in (30.0 cm)				
Package 2 Width	11.81 in (30.0 cm)				
Package 2 Length	15.75 in (40.0 cm)				
Package 2 Weight	11.24 lb(US) (5.099 kg)				

Contractual warranty

Warranty

18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

✓ Reach Free Of Svhc
 ✓ Mercury Free
 ✓ Rohs Exemption Information


Certifications & Standards


Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

HMISTO501

Dimensions Drawings


Dimensions with Spring Clips

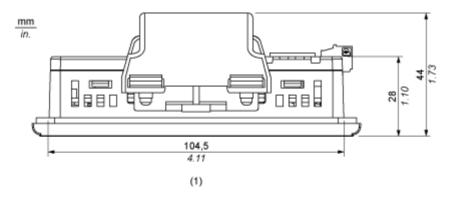

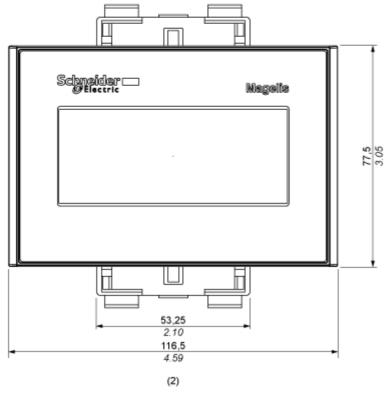

- **(1)** Top
- (2) Front

Dimensions without Spring Clips

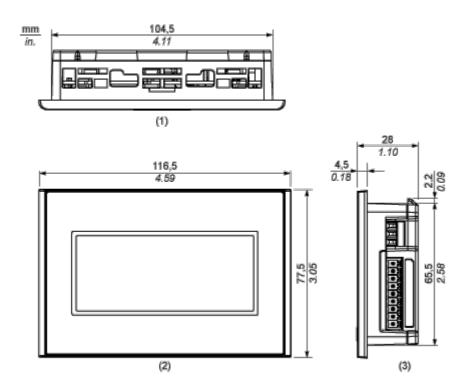

- **(1)** Top
- (2) Front
- (3) Right Side


Product data sheet


HMISTO501

Mounting and Clearance


Clearance

in.



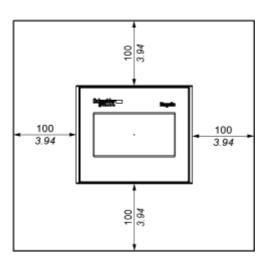

Panel Cut-out Dimensions

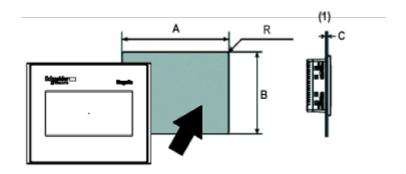

(1) Panel

A (mm)	A (in.)	B (mm)	B (in.)	C (mm) Spring Clips	C (in.) Spring Clips	R (mm)	R (in.)
+1 105 -0	+0.04 4.13 -0	+1 66 -0	+0.04 2.59 -0	1.5 to 6.0	0.059 to 0.236	2.0 to 3.0	0.078 to 0.118