Specifications





logic controller, Modicon M221, 24 IO, relay

TM221C24R

Main

Range Of Product	Modicon M221
Product Or Component Type	Logic controller
[Us] Rated Supply Voltage	100240 V AC
Discrete Input Number	14, discrete input conforming to IEC 61131-2 Type 1
Analogue Input Number	2 at 010 V
Discrete Output Type	Relay normally open
Discrete Output Number	10 relay
Discrete Output Voltage	5125 V DC 5250 V AC
Discrete Output Current	2 A

Complementary

Discrete I/O Number	24
Maximum Number Of I/O Expansion Module	7 (local I/O-Architecture) 14 (remote I/O-Architecture)
Supply Voltage Limits	85264 V
Network Frequency	50/60 Hz
Inrush Current	40 A
Maximum Power Consumption In Va	55 VA at 100240 V with max number of I/O expansion module 32 VA at 100240 V without I/O expansion module
Power Supply Output Current	0.52 A 5 V for expansion bus 0.16 A 24 V for expansion bus
Discrete Input Logic	Sink or source (positive/negative)
Discrete Input Voltage	24 V
Discrete Input Voltage Type	DC
Analogue Input Resolution	10 bits
Lsb Value	10 mV
Conversion Time	1 ms per channel + 1 controller cycle time for analogue input analog input
Permitted Overload On Inputs	+/- 30 V DC for 5 min (maximum) for analog input +/- 13 V DC (permanent) for analog input
Voltage State 1 Guaranteed	>= 15 V for input
Voltage State 0 Guaranteed	<= 5 V for input
Discrete Input Current	7 mA for discrete input 5 mA for fast input

Input Impedance	3.4 kOhm for discrete input
	100 kOhm for analog input 4.9 kOhm for fast input
Response Time	35 μs turn-off, I2I5 terminal(s) for input
	10 ms turn-on for output 10 ms turn-off for output
	5 μs turn-on, I0, I1, I6, I7 terminal(s) for fast input
	35 µs turn-on, other terminals terminal(s) for input
	5 μs turn-off, I0, I1, I6, I7 terminal(s) for fast input 100 μs turn-off, other terminals terminal(s) for input
Configurable Filtering Time	0 ms for input
	3 ms for input 12 ms for input
Output Voltage Limits	125 V DC 277 V AC
Maximum Current Per Output Common	4 A at COM 2
	7 A at COM 0 7 A at COM 1
Absolute Accuracy Error	+/- 1 % of full scale for analog input
Electrical Durability	100000 cycles AC-12, 120 V, 240 VA, resistive
	100000 cycles AC-12, 240 V, 480 VA, resistive
	300000 cycles AC-12, 120 V, 80 VA, resistive 300000 cycles AC-12, 240 V, 160 VA, resistive
	100000 cycles AC-15, cos phi = 0.35, 120 V, 60 VA, inductive
	100000 cycles AC-15, cos phi = 0.35, 240 V, 120 VA, inductive
	300000 cycles AC-15, cos phi = 0.35, 120 V, 18 VA, inductive
	300000 cycles AC-15, cos phi = 0.35, 240 V, 36 VA, inductive
	100000 cycles AC-14, cos phi = 0.7, 120 V, 120 VA, inductive 100000 cycles AC-14, cos phi = 0.7, 240 V, 240 VA, inductive
	300000 cycles AC-14, cos phi = 0.7, 120 V, 36 VA, inductive
	300000 cycles AC-14, cos phi = 0.7, 240 V, 72 VA, inductive
	100000 cycles DC-12, 24 V, 48 W, resistive
	300000 cycles DC-12, 24 V, 16 W, resistive 100000 cycles DC-13, 24 V, 24 W, inductive (L/R = 7 ms)
	300000 cycles DC-13, 24 V, 7.2 W, inductive (L/R = 7 ms)
Switching Frequency	20 switching operations/minute with maximum load
Mechanical Durability	20000000 cycles for relay output
Minimum Load	1 mA at 5 V DC for relay output
Protection Type	Without protection at 5 A
Reset Time	1s
	15
Memory Capacity	256 kB for user application and data RAM with 10000 instructions 256 kB for internal variables RAM
Data Backed Up	256 kB built-in flash memory for backup of application and data
Data Storage Equipment	2 GB SD card (optional)
Battery Type	BR2032 or CR2032X lithium non-rechargeable
Backup Time	1 year at 25 $^\circ\text{C}$ (by interruption of power supply)
Execution Time For 1 Kinstruction	0.3 ms for event and periodic task
Execution Time Per Instruction	0.2 μs Boolean
Exct Time For Event Task	60 µs response time
Maximum Size Of Object Areas	255 %C counters
	8000 %MW memory words
	512 %M memory bits
	512 %KW constant words 255 %TM timers
Realtime Clock	With
Clock Drift	<= 30 s/month at 25 °C
Regulation Loop	Adjustable PID regulator up to 14 simultaneous loops

4 fast input (HSC mode) at 100 kHz 32 bits A/B Single phase Pulse/direction USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with RJ45 connector and RS485 interface Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for RUN 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD) 1 LED (red) for BAT
Single phase Pulse/direction USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with RJ45 connector and RS485 interface Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA
Pulse/direction USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with RJ45 connector and RS485 interface Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA
USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with RJ45 connector and RS485 interface Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (green) for RUN 1 LED (green) for SD card access (SD)
Non isolated serial link serial 1 with RJ45 connector and RS485 interface Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA
Non isolated serial link serial 2 with RJ45 connector and RS232/RS485 interface (serial)serial link supply: 5 V, <200 mA
(serial)serial link supply: 5 V, <200 mA 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
480 Mbit/s for USB USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD)
1 LED (green) for SD card access (SD)
1 LED (red) for BAT
1 LED (green) for SL1
1 LED (green) for SL2
1 LED per channel (green) for I/O state
removable screw terminal block for inputs
removable screw terminal block for outputs
terminal block, 3 terminal(s) for connecting the 24 V DC power supply
connector, 4 terminal(s) for analogue inputs
Mini B USB 2.0 connector for a programming terminal
Shielded cable: <10 m for fast input
Unshielded cable: <30 m for output
Unshielded cable: <30 m for digital input
Unshielded cable: <1 m for analog input
Between input and internal logic at 500 V AC
Non-insulated between analogue input and internal logic
Non-insulated between analogue inputs
Between supply and ground at 1500 V AC
Between sensor power supply and ground at 500 V AC
Between input and ground at 500 V AC
Between output and ground at 1500 V AC
Between supply and internal logic at 2300 V AC
Between sensor power supply and internal logic at 500 V AC
Between output and internal logic at 2300 V AC
Between Ethernet terminal and internal logic at 500 V AC Between supply and sensor power supply at 2300 V AC
СЕ
24 V DC at 250 mA supplied by the controller
Top hat type TH35-15 rail conforming to IEC 60715
Top hat type TH35-7.5 rail conforming to IEC 60715
plate or panel with fixing kit
90 mm
70 mm
110 mm
0.395 kg

Environment

Standards

IEC 61131-2 UL 508 CAN/CSA C22.2 No. 213 IACS E10 ANSI/ISA 12-12-01

Product Certifications	LR	
	ABS	
	DNV-GL RCM	
	cULus	
	EAC	
	CE	
	UKCA	
	cULus HazLoc	
Environmental Characteristic	Ordinary and hazardous location	
Resistance To Electrostatic	8 kV in air conforming to IEC 61000-4-2	
Discharge	4 kV on contact conforming to IEC 61000-4-2	
Resistance To Electromagnetic	10 V/m 80 MHz1 GHz conforming to IEC 61000-4-3	
Fields	3 V/m 1.4 GHz2 GHz conforming to IEC 61000-4-3	
	1 V/m 22.7 GHz conforming to IEC 61000-4-3	
Resistance To Magnetic Fields	30 A/m 50/60 Hz conforming to IEC 61000-4-8	
Resistance To Fast Transients	2 kV (power lines) conforming to IEC 61000-4-4	
	2 kV (relay output) conforming to IEC 61000-4-4	
	1 kV (I/O) conforming to IEC 61000-4-4	
	1 kV (Ethernet line) conforming to IEC 61000-4-4	
	1 kV (serial link) conforming to IEC 61000-4-4	
Surge Withstand	2 kV power lines (AC) common mode conforming to IEC 61000-4-5	
-	2 kV relay output common mode conforming to IEC 61000-4-5	
	1 kV I/O common mode conforming to IEC 61000-4-5	
	1 kV shielded cable common mode conforming to IEC 61000-4-5	
	0.5 kV power lines (DC) differential mode conforming to IEC 61000-4-5	
	1 kV power lines (AC) differential mode conforming to IEC 61000-4-5	
	1 kV relay output differential mode conforming to IEC 61000-4-5	
	0.5 kV power lines (DC) common mode conforming to IEC 61000-4-5	
Resistance To Conducted	10 V 0.1580 MHz conforming to IEC 61000-4-6	
Disturbances	3 V 0.180 MHz conforming to Marine specification (LR, ABS, DNV, GL)	
	10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to	
	Marine specification (LR, ABS, DNV, GL)	
Electromagnetic Emission	Conducted emissions - test level: 79 dBµV/m QP/66 dBµV/m AV (power lines (AC))	
	at 0.150.5 MHz conforming to IEC 55011	
	Conducted emissions - test level: 73 dBµV/m QP/60 dBµV/m AV (power lines (AC))	
	at 0.5300 MHz conforming to IEC 55011	
	Conducted emissions - test level: 12069 dBµV/m QP (power lines) at 10150 kHz	
	conforming to IEC 55011	
	Conducted emissions - test level: 63 dBµV/m QP (power lines) at 1.530 MHz	
	conforming to IEC 55011 Radiated emissions - test level: 40 dBµV/m QP class A (10 m) at 30…230 MHz	
	conforming to IEC 55011	
	Conducted emissions - test level: 7963 dBµV/m QP (power lines) at 1501500	
	kHz conforming to IEC 55011	
	Radiated emissions - test level: 47 dBµV/m QP class A (10 m) at 2001000 MHz	
	conforming to IEC 55011	
Immunity To Microbreaks	10 ms	
Ambient Air Temperature For Operation	-1055 °C (horizontal installation) -1035 °C (vertical installation)	
Ambient Air Temperature For	-2570 °C	
Storage		
Relative Humidity	1095 %, without condensation (in operation) 1095 %, without condensation (in storage)	
Ip Degree Of Protection	IP20 with protective cover in place	
Pollution Degree	<= 2	
Operating Altitude	02000 m	
Storage Altitude	03000 m	
Vibration Resistance	3.5 mm at 5 8.4 Hz on symmetrical rail	
VISIALION RESISTANCE	3.5 mm at 5…8.4 Hz on symmetrical rail 3.5 mm at 5…8.4 Hz on panel mounting	
	1 gn at 8.4150 Hz on symmetrical rail	
	1 gn at 8.4150 Hz on panel mounting	

Shock Resistance

98 m/s² for 11 ms

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	11.116 cm
Package 1 Width	14.219 cm
Package 1 Length	15.643 cm
Package 1 Weight	640.0 g
Unit Type Of Package 2	CAR
Number Of Units In Package 2	20
Package 2 Height	29.1 cm
Package 2 Width	39.5 cm
Package 2 Length	56.3 cm
Package 2 Weight	13.87 kg
Unit Type Of Package 3	P12
Number Of Units In Package 3	240
Package 3 Height	120.0 cm
Package 3 Width	105.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	164 kg

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance




Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information


Dimensions Drawings


Dimensions

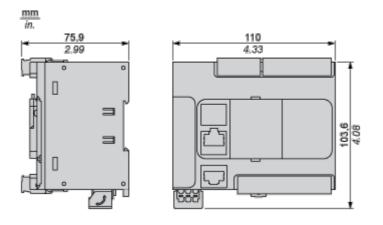

Mounting and Clearance


Mounting on a Rail






(1) Install a mounting strip

Mounting Hole Layout

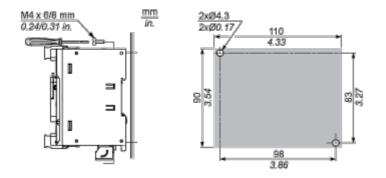


Mounting

Correct Mounting Position

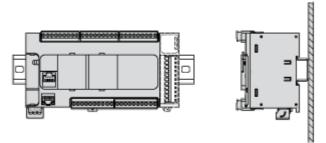


Acceptable Mounting Position



Incorrect Mounting Position









26 Apr 2024

Clearance

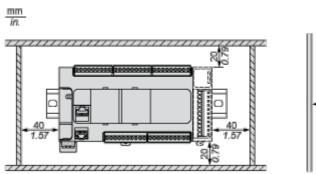




Connections and Schema


Digital Inputs

Wiring Diagram (Positive Logic)

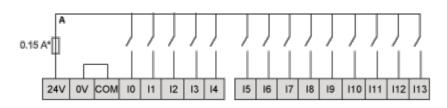

(*) Type T fuse

Wiring Diagram (Negative Logic)

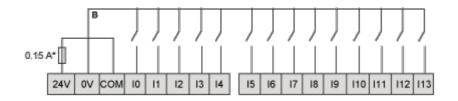

(*) Type T fuse


Connection of the Fast Inputs



10, 11, 16, 17

Relay Outputs

Negative Logic (Sink)

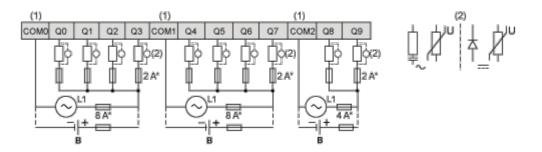


(*) Type T fuse

(1) The COM0, COM1 and COM2 terminals are not connected internally.

(2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load

B Sink wiring (negative logic)

Positive Logic (Source)

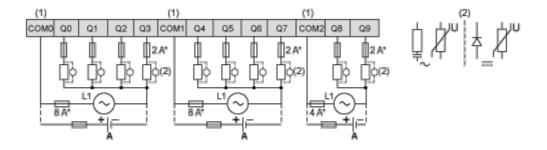


(*) Type T fuse


(1) The COM0, COM1 and COM2 terminals are not connected internally.

(2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load

A Source wiring (positive logic)

Analog Inputs




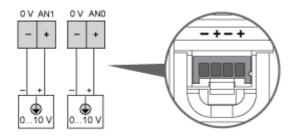

The (-) poles are connected internally.

Pin	Wire Color
0 V	Black
AN1	Red
0 V	Black
AN0	Red

USB Mini-B Connection

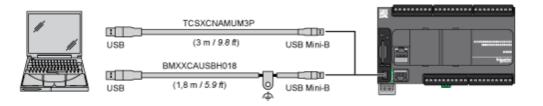


SL1 Connection




SL1		
Ν°	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1
5	N.C.	D0
6	стѕ	N.C.
7	N.C*.	5 Vdc
8	Common	Common

N.C.: not connected

 * : 5 Vdc delivered by the controller. Do not connect.

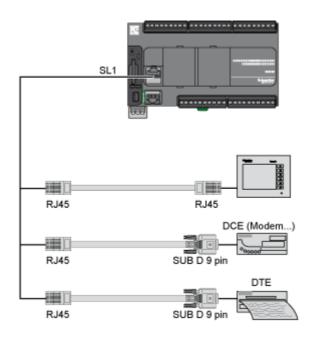




N°	RS 485
1	N.C.
2	N.C.
3	N.C.
4	D1
5	D0
6	N.C.
7	N.C.
8	Common

N.C.: not connected

Performance Curves


Derating Curves

Embedded Digital Inputs (No Cartridge)

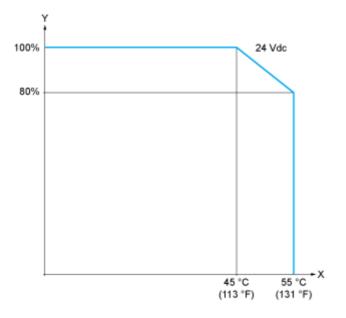

- X: Ambient temperature
- Y: Input simultaneous ON ratio

Embedded Digital Inputs (with Cartridge)

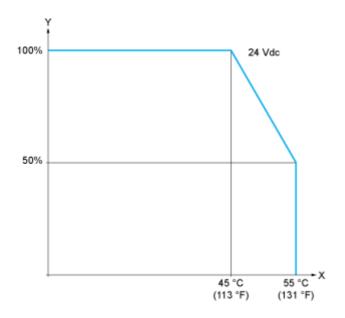

- X: Ambient temperature
- Y: Input simultaneous ON ratio