



## Commercial status

Discontinued on: 23 January 2021

To be end-of-service on: 31 December 2026

140CPU67861C has not been replaced. Please contact your customer care centre for more information.

⚠ Discontinued - Service only

## Main

Range of product	Modicon Quantum automation platform
Product or component type	Unity processor

## Complementary

Mode of transmission	Single mode
Clock frequency	266 MHz
Number of slots	16 6 2 10 4
Number of racks	2 - local rack(s)
Number of distributed I/O station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number of remote I/O station	31 - 2 rack(s) per S908 remote I/O 31 - 2 rack(s) per ethernet Quantum remote I/O 31 - 2 rack(s) per ethernet X80 remote I/O
Discrete I/O number	31744 inputs, 31744 outputs - remote 8000 inputs, 8000 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 0 - local - forbidden in Hot Standby application
Analogue I/O number	500 inputs, 500 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 1984 inputs, 1984 outputs - remote 0 - local - forbidden in Hot Standby application
Application specific I/O	High-speed interrupt inputs Counter Serial link Accurate time stamping
Communication service	Ethernet router
Number of optional modules	6 (Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum number of connections	1 USB 2 AS-Interface - distributed

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	4 AS-Interface - remote 6 Ethernet TCP/IP - local 6 Modbus Plus - local 6 Profibus DP - local 1 Modbus (RS232/485 Modbus/ASCII)
Integrated connection type	1 Modbus Plus with 1 Modbus with 1 USB with 1 optic fibre with Hot Standby
Checks	Hot standby Process control
Memory description	Expandable 7168 kB - program with PCMCIA card Expandable 8 MB - file storage with PCMCIA card Internal RAM 3072 kB - 1536 kB for data
Switch function	Key switch memory port on/off
Application structure	1 periodic fast task - forbidden in Hot Standby application 128 I/O interrupt tasks - forbidden in Hot Standby application 128 interrupt tasks - forbidden in Hot Standby application 32 timer interrupt tasks - forbidden in Hot Standby application 4 auxiliary tasks - forbidden in Hot Standby application 1 cyclic/periodic master task -
Number of instructions per ms	10.28 Kinst/ms 100 % Boolean 10.07 Kinst/ms 65 % Boolean and 35 % numerical
System overhead	0.2 ms for fast task 1 ms for master task
Bus current requirement	2760 mA
Local signalling	1 LED (green) for Ethernet activity (COM) 1 LED (red) for Ethernet collision
Electrical connection	1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network 1 connector, connector type: RJ45 for connecting Modbus bus 1 connector, connector type: LC (single mode fiber optic) for interconnecting primary and secondary PLCs up to 16 km

## Environment

Protective treatment	Conformal coating Humiseal 1A33
Product certifications	UL Misc (Marine) CSA CE GOST
Standards	HazLoc

## Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.424 kg
Package 1 Height	11 cm
Package 1 width	18.5 cm
Package 1 Length	32.5 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

Racks for Modules Mounting

Dimensions of Modules and Racks

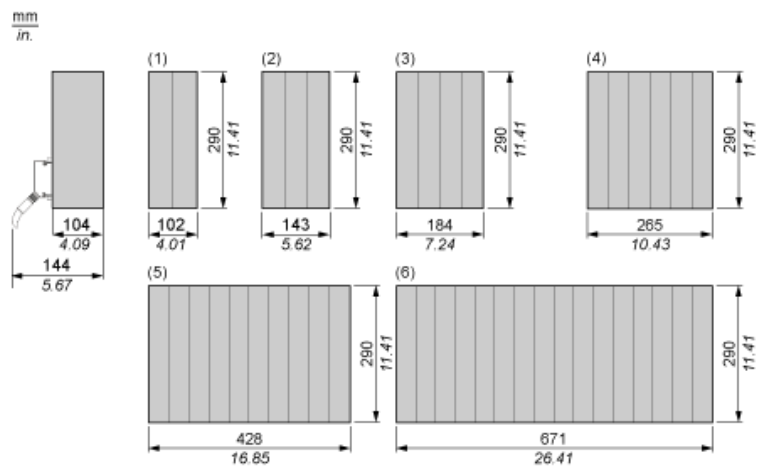

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots