

Product datasheet

Specifications



empty control station - XB2-S - metal - 30 openings in 6 columns

XB2SL65007

⚠ Discontinued on: 29-Jan-2021

⚠ End-of-service on: 20-Nov-2023

⚠ Discontinued

Main

Range Of Product	Harmony XAP
Product Or Component Type	Empty control station
Device Short Name	XB2SL
Product Destination	For Ø 22 mm control and signalling units
Product Front Plate Size	260 x 320 mm
Usable Depth	115 mm
Number Of Cut-Out	30 cut-outs
Material	Sheet steel
Product Mounting	Flush mounting
Ip Degree Of Protection	IP54 conforming to IEC 60529 IP547 conforming to NF C 20-010

Complementary

Number Of Vertical Rows	6
Net Weight	5.5 kg

Environment

Protective Treatment	TC
Ambient Air Temperature For Storage	-40...70 °C
Ambient Air Temperature For Operation	-25...70 °C
Electrical Shock Protection Class	Class I conforming to IEC 60536 Class I conforming to NF C 20-030

Contractual warranty

Warranty	18 months
----------	-----------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Sustainability





Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

Well-being performance

	Reach Free Of Svhc	
	Toxic Heavy Metal Free	
	Mercury Free	
	Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration	
China Rohs Regulation	China RoHS declaration	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	No need of specific recycling operations	

Dimensions Drawings

Dimensions

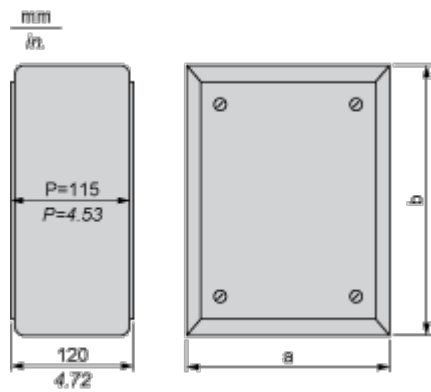


P Usable depth

a		b	
mm	in.	mm	in.
260	10.24	320	12.6

Refer to the product characteristics to get the number of cut-outs.

Cut-out interaxis dimensions (vertical mounting)



- b1 Vertical interaxis: 40 mm/1.57 in.
- b2 Horizontal interaxis: 30 mm/1.18 in.