



Pulsteller 60x50 24VDC

XBKT80000U00M

! Utgikk: 27. juni 2022

EAN: 3389110739763

! Utgått

Teknisk informasjon

Produktspekter	Zelio Count
Produkt Eller Type Komponent	Totalising counter
Skjermtype	Mekanisk
Størrelse	50 x 60 mm
Display Sifre	8 siffer - 4 mm
Maximum Counting Frequency	25 Hz
Tilbakestille	Uten
Tellerkapasitet	0...9 999 999
Teknologi	Mekanisk

Komplementær

[Us] Merkespenning	24 V DC Us +/- 10 %
Strømforbruk I W	2,5 W
Backup-Tid	Permanent
Tellermodus	Adding
Inngangsfunksjon	Telling
Inngangstype	Kontakt
Mekanisk Levetid	200000000 sykluser
Monteringsmetode	Innfelt montering
Montering	Montering i panel
Tilkoblingsklemmer	AMP kabelsko (koplingsboks)
Høyde	50 mm
Vekt	0,15 kg
Bredde	60 mm
Bredde	60 mm
Høyde	50 mm
Dybde	94 mm

Miljø

Standarder	EN/IEC 50081-2 EN/IEC 50082-2
------------	----------------------------------

Ansvarsfraskrivelse: Dokumentasjonen erstatter ikke opplysninger om produktene, og skal ikke brukes til å fastslå produktenes egnethet eller driftssikkerhet for bestemte bruksområder.

Produktsertifikater	cURus
Ip-Grad	IP40 i samsvar med EN/IEC 60529
Omgivelsestemperatur Drift	-10...50 °C
Omgivelsestemperatur For Lagring	-20...60 °C
Vibrasjonsmotstand	5 gn (f= 10...150 Hz) i samsvar med EN/IEC 60068-2-6
Støtmotstand	30 gn for 6 ms i samsvar med EN/IEC 60068-2-27
Beskyttelsesgrad Mot Elektrisk Støt	Klasse II i samsvar med IEC 60536

Forpakkingsinformasjon

Enhetsstype Pakke 1	PCE
Antall Enheter I Pakke 1	1
Pakke 1 Høyde	7,8 cm
Pakke 1 Bredde	15,6 cm
Pakke 1 Vekt	11,8 cm
Package 1 Weight	188 g

Garantiperiode

Garanti	18 months
---------	-----------

Bærekraft

Green Premium™-merket er Schneider Electrics forpliktelse til å levere produkter med den beste miljøytelsen i sin klasse. Green Premium lover samsvar med de nyeste forskriftene, åpenhet om miljøpåvirkning samt sirkulære og lite CO₂-produkter.

Veiledning til vurdering av produktets bærekraft er en innsiktsrapport som klargjør globale miljømerkestandarder og hvordan du tolker miljøerklæringer.

[Les mer om Green Premium >](#)

[Veiledning i vurdering av bærekraften til et produkt >](#)

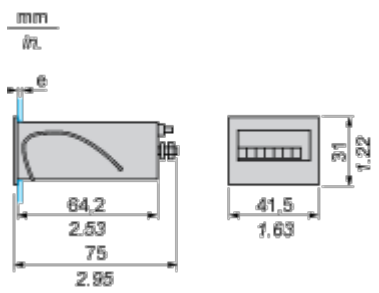

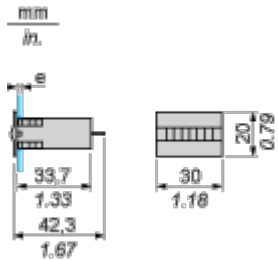

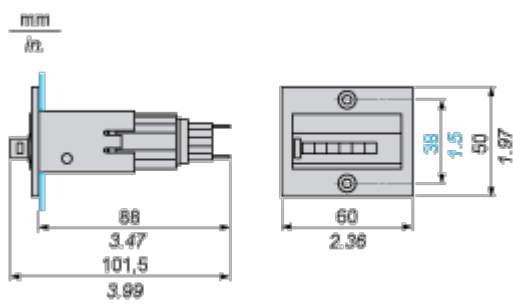
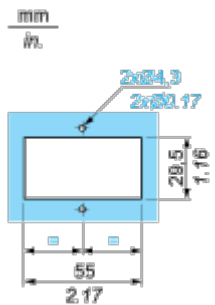
Tilfredshetsresultater





	Kvikksølvfri	
	Informasjon Om Rohs-Unntak	Ja
Eu Rohs-Direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)	
Kinas Rohs-Forskrift	Kinas RoHS-erklæring	
Weee	Innen EU må produktet avhendes i henhold til bestemte regler for avfallshåndtering og aldri kastes som husholdningsavfall.	

Dimensions Drawings

Electromechanical and Electronic Totalizing Counters

Dimensions, Flush-Mounting

Counters Dimensions	Flush-Mounting
XBKT50000U••M, XBKT70000U••M	
 Technical drawing of XBKT50000U••M and XBKT70000U••M showing front and side views with dimensions in mm and inches. Front view dimensions (mm/in): 64.2/2.53, 75, 2.95, 41.5/1.63, 31/1.22. Side view dimensions (mm/in): 31/1.22, 41.5/1.63.	 Technical drawing of XBKT50000U••M and XBKT70000U••M showing flush-mounting dimensions in mm and inches. Flush-mounting dimensions (mm/in): 38.5/1.52, 27/1.06.
XBKT60000U00M	
 Technical drawing of XBKT60000U00M showing front and side views with dimensions in mm and inches. Front view dimensions (mm/in): 33.7/1.33, 42.3/1.67, 30/1.18, 20/0.79. Side view dimensions (mm/in): 20/0.79, 30/1.18.	 Technical drawing of XBKT60000U00M showing flush-mounting dimensions in mm and inches. Flush-mounting dimensions (mm/in): 27/1.06, 14.2/0.56.
XBKT60000U1•M	
 Technical drawing of XBKT60000U1•M showing front and side views with dimensions in mm and inches. Front view dimensions (mm/in): 68, 3.47, 101.5, 3.99, 60, 2.36, 38, 1.5, 50, 1.97. Side view dimensions (mm/in): 38, 1.5, 50, 1.97.	 Technical drawing of XBKT60000U1•M showing flush-mounting dimensions in mm and inches. Flush-mounting dimensions (mm/in): 28.5/1.16, 55, 2.17, 2x24.3, 2x22.17.
XBKT80000U00M	

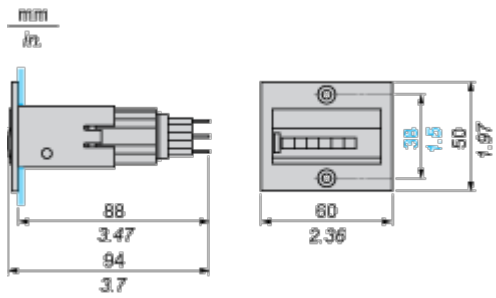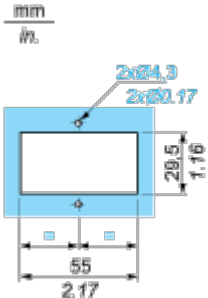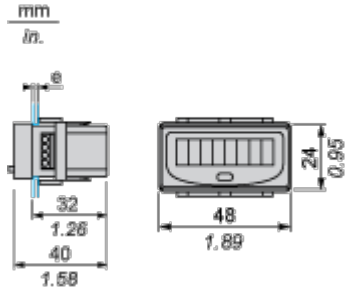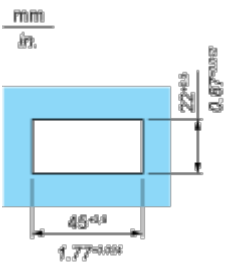
Counters Dimensions	Flush-Mounting
 Technical drawings of the XBKT80000U00M device showing side, front, and flush-mounting views with dimensions in mm and in. Side view dimensions: 88 mm (3.47 in.), 94 mm (3.7 in.), 3.7 mm. Front view dimensions: 60 mm (2.36 in.), 38 mm (1.5 in.), 50 mm (1.97 in.), 2.36 mm. Flush-mounting view dimensions: 2x24.3 mm, 2x22.17 mm, 29.5 mm (1.16 in.), 55 mm (2.17 in.), 2.17 mm.	 Technical drawing of the XBKT80000U00M device showing the flush-mounting view with dimensions in mm and in. Dimensions: 2x24.3 mm, 2x22.17 mm, 29.5 mm (1.16 in.), 55 mm (2.17 in.), 2.17 mm.
XBKT81030U33E	
 Technical drawings of the XBKT81030U33E device showing side, front, and flush-mounting views with dimensions in mm and in. Side view dimensions: 32 mm (1.26 in.), 40 mm (1.58 in.), 1.58 mm. Front view dimensions: 48 mm (1.89 in.), 24 mm (0.95 in.), 0.95 mm. Flush-mounting view dimensions: 45 mm (1.77 in.), 22 mm (0.87 in.), 0.87 mm.	 Technical drawing of the XBKT81030U33E device showing the flush-mounting view with dimensions in mm and in. Dimensions: 45 mm (1.77 in.), 22 mm (0.87 in.), 0.87 mm.
e: panel thickness, 1 mm < e < 2.5 mm / 0.039 in. < e < 0.098	

Connections and Schema


Wiring Diagrams of Electromechanical and Electronic Totalizing Counters

Counters with Mechanical Display

XBKT50000U•M, XBKT70000U00M




XBKT60000U1•M, XBKT80000U00M

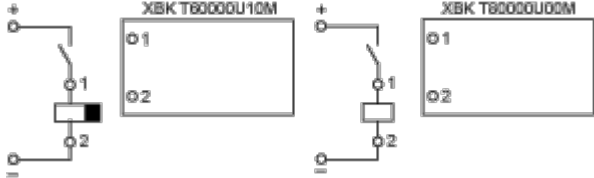

Counters with LCD Display, Lithium Battery Supply

XBKT181030U33E

PNP Transistor, NPN Transistor




- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset

Reset Key Locking Facility



- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset

Volt-free Contact



- 1: Keylock
- 2: 0 V
- 3: Count
- 4: Reset

