Product data sheet

Specification





Backplane, Modicon X80 automation platform, 4 slots, panel, plate or DIN rail mounting

BMXXBP0400

Main

Range Of Product	Modicon X80
Product Or Component Type	Backplane

Complementary

,		
Number Of Slots	4 bus X	
Product Compatibility	BMXP34 processor BMXCPS power supply I/O module Specific application module	
Power Consumption In W	1.12 W	
Electrical Connection	1 connector (XBE) expansion module	
Fixing Mode	By 4 M4/M5/M6 screws, mounting on panel By 4 M4/M5/M6 screws, mounting on mounting plate By clips, mounting on 35 mm symmetrical DIN rail	
Height	103.7 mm	
Width	242.4 mm	
Depth	19 mm	
Net Weight	0.63 kg	

Environment

Ip Degree Of Protection	IP20		
Ambient Air Temperature For Operation	060 °C		
Relative Humidity	1095 % without condensation		
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility		
Product Certifications	CE UL CSA RCM EAC UKCA Merchant Navy		
Standards	EN/IEC 61131-2 EN/IEC 61010-2-201 UL 61010-2-201		

IACS E10 EN/IEC 61000

EN/IEC 61000-6-5, interface type 1 and type 2

EN/IEC 61850-3, location G

CSA C22.2 No 61010-2-201

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.600 cm
Package 1 Width	15.200 cm
Package 1 Length	32.500 cm
Package 1 Weight	681.000 g
Unit Type Of Package 2	S04
Number Of Units In Package 2	13
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	9.651 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	78
Package 3 Height	105.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	66.600 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Reach Regulation	Pro-active compliance (Product out of EU RoHS legal scope)	
Eu Rohs Directive		
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Product data sheet

BMXXBP0400

Dimensions Drawings

Dimensions

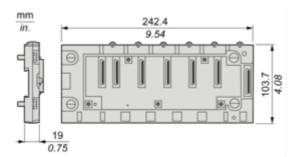


BMXXBP0400

Mounting and Clearance

Minimum Clearance

Minimum Clearance of a typical installation in a cabinet with ducts

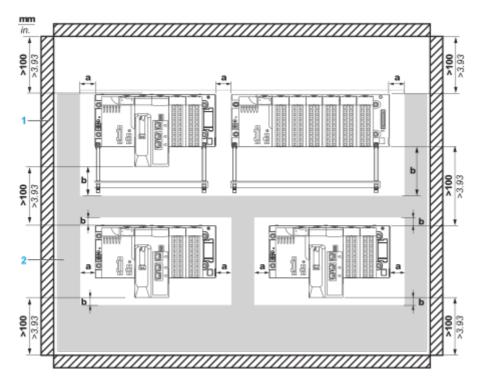


- a Side clearance: > 40 mm (1.57 in.)
- **b** Top and bottom clearance with surrounding objects: > 20 mm (0.79 in.)
- 1 Installation or casing
- 2 Wiring duct or tray

Mounting on DIN rail

Symmetric DIN rail		S S. S	
Type A	Туре В	Double-profile DIN rail	
35.0 12.20 12.20 15.20 1	mm in 51.0 88.1 7.2 0.28	7.2 0.28 98.1 0.59	


NOTE: When mounted on a type B symmetric DIN rail, the rack withstands less mechanical stress.

Mounting on panels

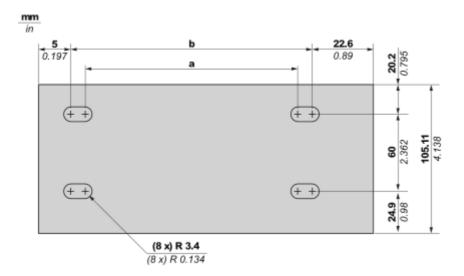

Rack Type	а	b	
	BMXXBP0400	202.1 mm	214.8 mm
	BMXXBP0400H	(7.957 in)	(8.457 in)
V Door works	BMXXBP0600	267.5 mm	280 mm
	BMXXBP0600H	(10.531 in)	(11.023 in)
X Bus racks	BMXXBP0800	332.5 mm	345.2 mm
	BMXXBP0800H	(13.091 in)	(13.591 in)
	BMXXBP1200	462.9 mm	475.6 mm
	BMXXBP1200H	(18.224 in)	(18.724 in)

Mounting on Telequick mounting plate

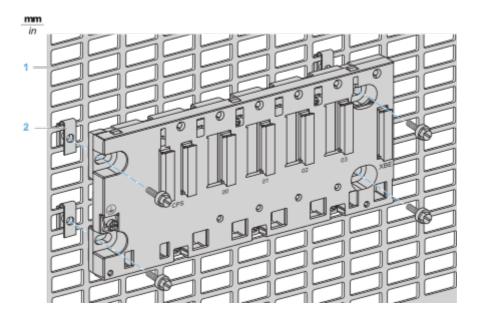

1 Telequick plate 2 Clip-on nuts

NOTE: The two right side screws are accessible until there is no rack extender module installed