Product datasheet





discrete input module Modicon Quantum - 16 I - 115 V AC - 16 channels

Local distributor code: 395516131

140DAI54000

! To be discontinued on: 31 Dec 2030

! To be end-of-service on: 31 Dec 2030

EAN Code: 3595861126916

Main

| Range Of Product | Modicon Quantum automation platform |
|---------------------------|-------------------------------------|
| Product Or Component Type | VAC discrete input modules |
| Software Name | Concept ProWORX 32 Unity Pro |
| Discrete Input Number | 16 |

Complementary

| Group Of Channels | 16 |
|------------------------------------|--|
| Addressing Requirement | 1 input word |
| Discrete Input Voltage | 115 V AC |
| Input Current | 11.1 mA at 5763 Hz 13.2 mA at 4753 Hz |
| Voltage State 1 Guaranteed | 79132 V AC at 5763 Hz 85132 V AC at 4753 Hz |
| Voltage State 0 Guaranteed | 020 V AC at 5763 Hz 020 V AC at 4753 Hz |
| Input Impedance | 12000 Ohm capacitive at 5763 Hz 14400 Ohm capacitive at 4753 Hz |
| Network Frequency Limits | 4763 Hz |
| Maximum Leakage Current | 2.1 mA |
| Absolute Maximum Input | 132 V continuous 156 V 10 s 200 V 1 cycle |
| Response Time | 4.90.75 ms x line cycle Off-On 7.312.3 ms On-Off |
| Isolation Between Channels | 1780 Vrms for 1 minute |
| Isolation Between Channels And Bus | 1780 Vrms for 1 minute |
| Bus Current Requirement | 180 mA |
| Maximum Power Dissipation In W | 5.5 W |
| Local Signalling | LED (green) for bus communication is present (Active) LED (red) for external fault detected (F) 16 LEDs (green) for input status |
| Marking | CE |

Life Is On Schneider 19 Apr 2024

| Module Format | Standard | |
|---------------|----------|--|
| Net Weight | 0.31 kg | |

Environment

| Standards | UL 508 CSA C22.2 No 142 |
|--|---|
| Product Certifications | FM Class 1 Division 2 cUL |
| Resistance To Electrostatic Discharge | 4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2 |
| Resistance To Electromagnetic Fields | 10 V/m 802000 MHz conforming to IEC 801-3 |
| Ambient Air Temperature For Operation | 060 °C |
| Ambient Air Temperature For Storage | -4085 °C |
| Relative Humidity | 95 % without condensation |
| Operating Altitude | <= 5000 m |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|----------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 16.3 cm |
| Package 1 Width | 4.5 cm |
| Package 1 Length | 31.2 cm |
| Package 1 Weight | 438.0 g |
| Unit Type Of Package 2 | S03 |
| Number Of Units In Package 2 | 7 |
| Package 2 Height | 30.0 cm |
| Package 2 Width | 30.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 2.968 kg |

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

| | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| ⊘ | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |


Certifications & Standards

| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
|-----------------------|---|
| | EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | End of Life Information |

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

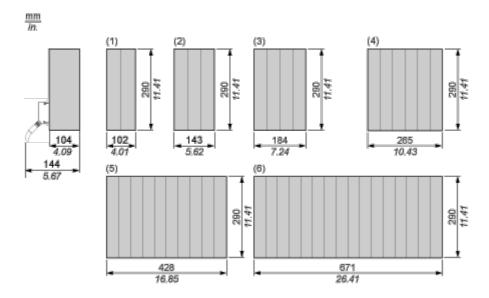


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

115 Vac Discrete Input Module

Wiring Diagram

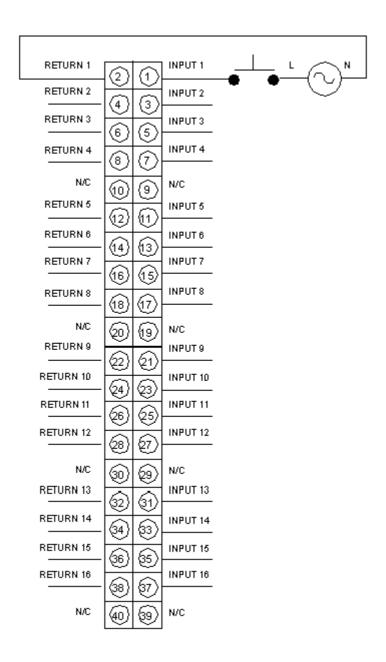

N/C Not Connected