

Product datasheet

Specifications



redundancy module - 40A - for regulated SMPS

Local distributor code:
389706672 ABL8RED24400

EAN Code: 3389119406871

Main

Range Of Product	Phaseo
Product Or Component Type	Redundancy module
Input Voltage	24...28.8 V DC
Output Voltage	(Uin-0.2) V DC
Maximum Output Current	40 A

Complementary

Input Voltage Limits	22...30 V
Input Current	20 A
Number Of Output Channels	1
Output Protection Type	Against overload, protection technology: external protection by power supply Against short-circuits, protection technology: external protection by power supply
Connections - Terminals	For output connection: screw type terminals, connection capacity: 2 x 0.5...2 x 10 mm² AWG 20...AWG 8 For input connection: screw type terminals, connection capacity: 4 x 0.5...4 x 10 mm² AWG 20...AWG 8 For diagnostic relay: removable screw terminal block, connection capacity: 1 x 2.5 mm² AWG 14
Fixing Mode	By clips on 35 mm symmetrical DIN rail, operating position: horizontal By clips on 35 mm symmetrical DIN rail, operating position: vertical
Output Coupling	Parallel
Operating Altitude	2000 m
Marking	CE
Name Of Test	Electrostatic discharges conforming to IEC 61000-4-2 Emission conforming to IEC 61000-6-3 Induced electromagnetic field conforming to IEC 61000-4-6 level 3 Radiated electromagnetic field conforming to IEC 61000-4-3 level 3 Rapid transient conforming to IEC 61000-4-4 level 3 Surge conforming to IEC 61000-4-5 level 2 Conducted/radiated emissions conforming to EN 55022 class B Emission conforming to EN 50081-1
Local Signalling	1 LED per input (green) for power supply status 1 relay for power supply status
Net Weight	0.7 kg

Environment

Product Certifications	EAC RCM
Standards	CSA C22.2 No 60950-1 UL 508

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Operation	-25...60 °C
Ambient Air Temperature For Storage	-40...85 °C
Environmental Characteristic	EMC conforming to IEC 61000-6-3 EMC conforming to IEC 61000-6-2 Safety conforming to IEC 60950-1 Safety conforming to EN/IEC 61204
Ip Degree Of Protection	IP20 conforming to IEC 60529
Dielectric Strength	500 V between input and ground 500 V between output and ground
Overvoltage Category	Class II conforming to VDE 0106-1
Relative Humidity	0...90 % during operation 0...95 % during storage
Mtbf Reliability	2488391 H at 24 V DC with UTE C80-810 calculation method
Vibration Resistance	2 gn (f= 11.9...150 Hz) conforming to IEC 61131-2 3.5 mm (f= 3...11.9 Hz) conforming to IEC 61131-2

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.5 cm
Package 1 Width	16.5 cm
Package 1 Length	16.0 cm
Package 1 Weight	594.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	10
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	5.94 kg
Unit Type Of Package 3	PAL
Number Of Units In Package 3	80
Package 3 Height	77.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	61.724 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability




Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)


Well-being performance

 Mercury Free	
 Rohs Exemption Information	Yes
 Pvc Free	
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration

Dimensions Drawings

Redundancy Module

Dimensions

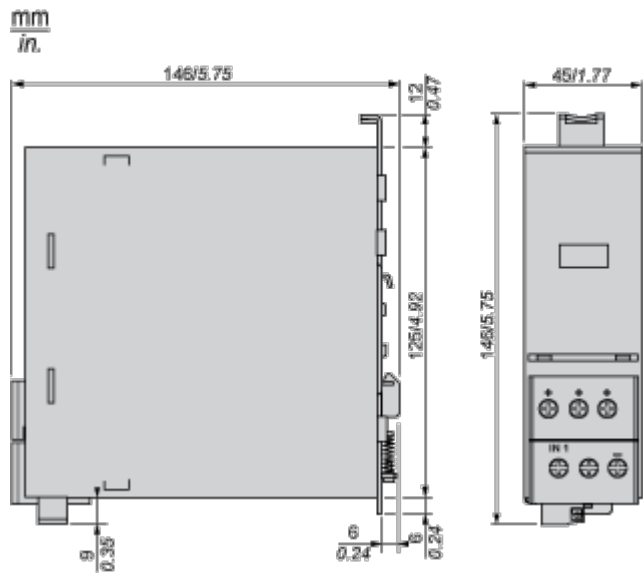


Mounting and Clearance

Redundancy Module

Mounting

Redundancy modules can be installed on a DIN rail. The graphic below provides the characteristics and references of the compatible DIN rails for the mounting of the module.

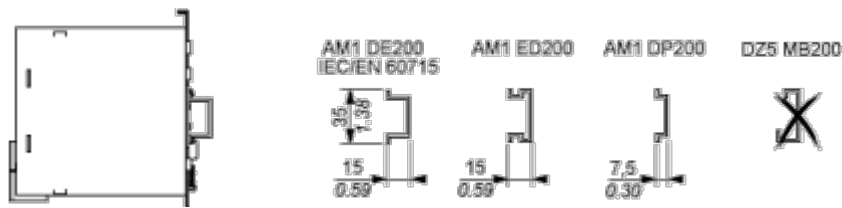


Wiring Requirements

Cable Types and Wire Sizes


 $\varnothing \leq 4 \text{ mm}^2$ $\varnothing \leq 12 \text{ AWG}$	 $\varnothing > 4 \text{ mm}^2$ $\varnothing > 12 \text{ AWG}$	ABL	8RPS24030	8RPS24050 8RPS24100	8RPM24200 8WPS24200/24400
+ In -	mm ² /AWG		1...4/16...12		
+ Out -	mm ² /AWG		1...4/16...12 4...10/12...6		
 mm/in	mm/in		4/0,16		
11...14	mm ² /AWG	-	0,2...2,5/24...14		

Internal Wiring Diagram

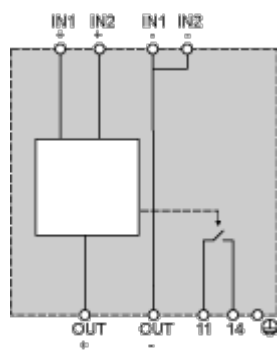

Scheme of Use with Power Supplies

Wiring Diagram with $I_n \leq 20\text{mA}$

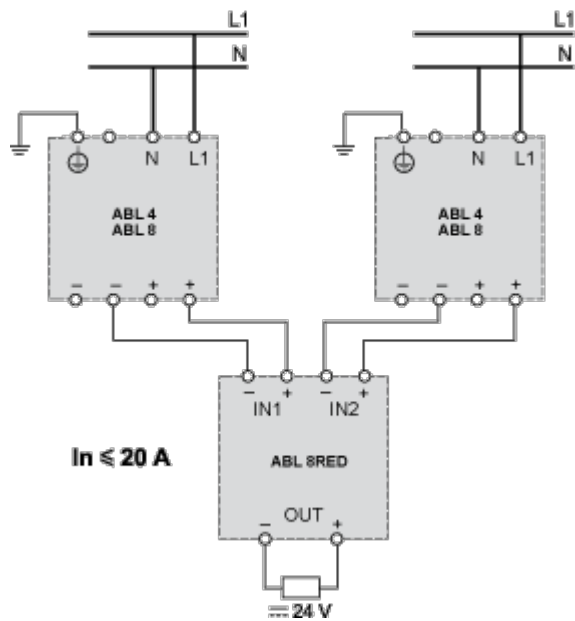

Wiring Diagram with $I_n \leq 40\text{mA}$

