Product datasheet

Specification





TeSys GV4 - thermal magnetic circuit breaker - 25A 3P - with Everlink

Local distributor code:

407810738 GV4PE25B

EAN Code: 3606481310071

Main

Range Of Product	TeSys GV4
Range	TeSys Deca TeSys Deca
Device Short Name	GV4PE
Product Name	TeSys GV4 TeSys Deca
Product Or Component Type	Motor circuit breaker
Device Application	Motor protection
Trip Unit Technology	Electronic Thermal-magnetic

Complementary

Poles Description	3P
Utilisation Category	Category A conforming to IEC 60947-2 AC-3 conforming to IEC 60947-4-1
Operating Position	Any position
Motor Power Kw	7.5 kW at 660690 V AC 50/60 Hz 5.5 kW at 400415 V AC 50/60 Hz 7.5 kW at 500 V AC 50/60 Hz 9 kW at 660690 V AC 50/60 Hz 11 kW at 660690 V AC 50/60 Hz 7.5 kW at 400415 V AC 50/60 Hz 9 kW at 400415 V AC 50/60 Hz 11 kW at 400415 V AC 50/60 Hz 11 kW at 400415 V AC 50/60 Hz 11 kW at 500 V AC 50/60 Hz 11 kW at 500 V AC 50/60 Hz 15 kW at 660690 V AC 50/60 Hz 15 kW at 660690 V AC 50/60 Hz
Breaking Capacity	50 kA Icu at 220240 V AC 50/60 Hz conforming to IEC 60947-2 25 kA Icu at 380415 V AC 50/60 Hz conforming to IEC 60947-2 20 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 10 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 35 kA at 208Y/120 V AC 50/60 Hz conforming to UL 60947 35 kA at 240 V AC 50/60 Hz conforming to UL 60947 18 kA at 480Y/277 V AC 50/60 Hz conforming to UL 60947 14 kA at 600Y/347 V AC 50/60 Hz conforming to UL 60947
Control Type	Toggle
[In] Rated Current	25 A
Magnetic Tripping Current	425 A
[Ue] Rated Operational Voltage	690 V AC 50/60 Hz conforming to IEC 60947-2
[Ui] Rated Insulation Voltage	800 V AC 50/60 Hz conforming to IEC 60947-2

115 A conforming to IEC 60947-4-1
8 kV conforming to IEC 60947-2
4.6 W
40000 cycles
40000 cycles for AC-3 at 440 V In/2 20000 cycles for AC-3 at 440 V In
25 cyc/h
Continuous conforming to IEC 60947-4-1
EverLink BTR screw connectors (top) 1 cable(s) 1.570 mm² - solid EverLink BTR screw connectors (top) 1 cable(s) 1.550 mm² - flexible EverLink BTR screw connectors (bottom) 1 cable(s) 2.595 mm² - solid EverLink BTR screw connectors (bottom) 1 cable(s) 2.570 mm² - flexible
9 N.m for cable 1695 mm² 5 N.m for cable 1.510 mm²
Vibrations: +/- 1 mm 213.2 Hz conforming to IEC 60068-2-6 Vibrations: 0.7 gn 13.2100 Hz conforming to IEC 60068-2-6 Shocks: 15 gn 11 ms conforming to IEC 60068-2-27
Yes conforming to IEC 60947-4-1
155 mm
81 mm
116 mm
1.45 kg
Grey (RAL 7016)
Yes conforming to IEC 60947-1
CSA C22.2 No 60947-4-1 UL 60947-4-1 EN/IEC 60947-4-1 EN/IEC 60947-2
IEC UL CSA CCC EAC ATEX EU-RO MR
conforming to IACS E10
IK07 conforming to IEC 62262
3
IP40 conforming to IEC 60529
-5085 °C
960 °C conforming to IEC 60695-2-11
5000 m
-2570 °C

115 A conforming to IEC 60947-4-1

[Ith] Conventional Free Air

Unit Type Of Package 1

PCE

Number Of Units In Package 1	1
Package 1 Height	16.8 cm
Package 1 Width	11.0 cm
Package 1 Length	22.0 cm
Package 1 Weight	1.6 kg
Unit Type Of Package 2	S03
Number Of Units In Package 2	5
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	9 kg

Contractual warranty

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Ø	Mercury Free
Ø	Rohs Exemption Information Yes
Ø	Pvc Free
②	Halogen Free Plastic Parts Product


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Performance Curves

Thermal-Magnetic Tripping Curves for GV4P, GV4PE, GV4PEM

Average Operating Times at 20 $^{\circ}\text{C}$ Related to Multiples of the Setting Current Hot state

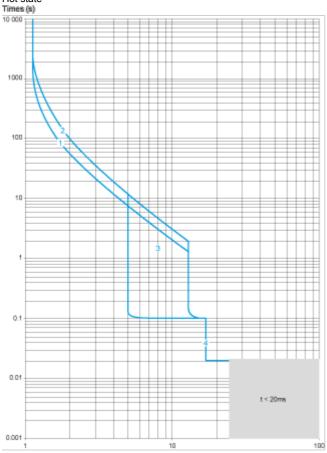


X the setting current in

- 1 Class 10
- 2 Class 20
- 3 lsd = 5...13x lr
- 4 li = 17 ln

Cold state

Product datasheet

GV4PE25B

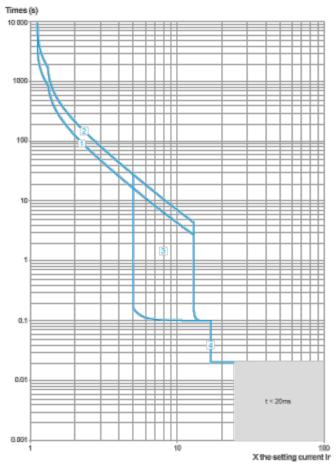


- 1 Class 10
- 2 Class 20
- 3 Isd = 5...13x Ir
- 4 li = 17 ln

Current Limitation on Short-Circuit for GV4P, GV4PE, GV4PEM (3-Phase 400/415 V)

Dynamic Stress

I peak = f (prospective lsc) at 1.05 Ue = 435 V

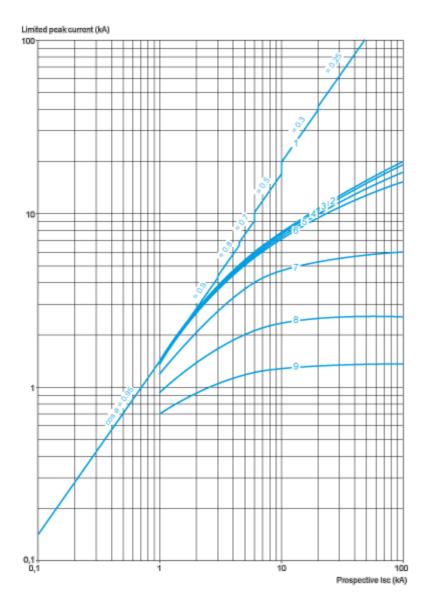

- 1 Maximum peak current
- 2 GV4P115
- 3 GV4P80
- 4 GV4P50
- 5 GV4P25
- 6 GV4P12
- 7 GV4P07
- 8 GV4P03
- 9 GV4P02


Thermal Limit on Short-Circuit for GV4P, GV4PE, GV4PEM

Thermal Limit in kA²2s in the Magnetic Operating Zone

Sum of I^2 dt = f (prospective lsc) at 1.05 Ue = 435 V

Product datasheet

GV4PE25B

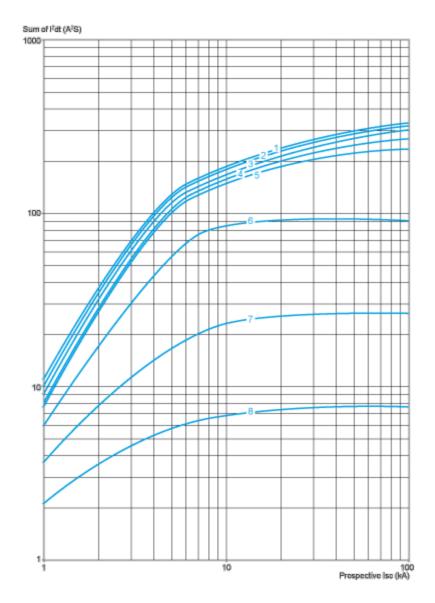


- GV4P115 1
- GV4P80 2
- GV4P50 3
- 4 GV4P25
- GV4P12 5
- GV4P07 6
- GV4P03 7
- GV4P02 8


Dimensions Drawings

GV4 with Toggle: GV4LE, GV4PE, GV4PEM

With EverLink® Connector

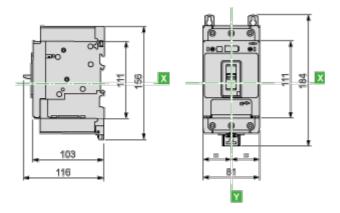


With Crimp Lug Connector



GV4 with Rotary Handle: GV4L, GV4P, or GV4LE, GV4PE, GV4PEM with GV4ADN01, GV4ADN02 Direct Mounting Rotary Handle


Dimensions

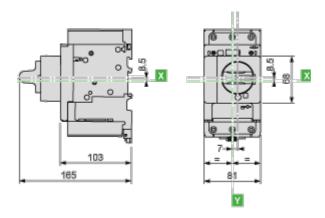


GV4L, GV4P, GV4LE, GV4PE, GV4PEM

Panel Mounting with M4 Screws


GV4PE25B



Door Cut-Out for Rotary Handle



Minimum Safety Clearance




Toggle-type, rotary handle-type: identical clearance values.

Safety Clearance (mm)							
	Painted She	Bare Sheet Metal					
	Α	В	С	Α	В	С	
No accessory	30	0	0	40	0	5	
Interphase barriers	0	0	0	0	0	5	
Long terminal shield	0	0	0	0	0	5	

Connections and Schema

Magnetic Motor Circuit Breakers GV4P, GV4PE, GV4PEM



11