Product datasheet

Specification





TeSys GV4 - thermal magnetic circuit breaker - 25A 3P - with Everlink

Local distributor code:

407810767 GV4PE25N

EAN Code: 3606481310279

Main

| Range Of Product | TeSys GV4 |
|---------------------------|-----------------------------|
| Range | TeSys Deca TeSys Deca |
| Device Short Name | GV4PE |
| Product Name | TeSys GV4 TeSys Deca |
| Product Or Component Type | Motor circuit breaker |
| Device Application | Motor protection |
| Trip Unit Technology | Electronic Thermal-magnetic |

Complementary

| Poles Description | 3P |
|--------------------------------|--|
| Utilisation Category | Category A conforming to IEC 60947-2 |
| | AC-3 conforming to IEC 60947-4-1 |
| Operating Position | Any position |
| Motor Power Kw | 7.5 kW at 660690 V AC 50/60 Hz |
| | 5.5 kW at 400415 V AC 50/60 Hz |
| | 7.5 kW at 500 V AC 50/60 Hz |
| | 9 kW at 660690 V AC 50/60 Hz |
| | 11 kW at 660690 V AC 50/60 Hz |
| | 7.5 kW at 400415 V AC 50/60 Hz |
| | 9 kW at 400415 V AC 50/60 Hz |
| | 11 kW at 400415 V AC 50/60 Hz |
| | 9 kW at 500 V AC 50/60 Hz |
| | 11 kW at 500 V AC 50/60 Hz |
| | 15 kW at 500 V AC 50/60 Hz |
| | 15 kW at 660690 V AC 50/60 Hz |
| | 18.5 kW at 660690 V AC 50/60 Hz |
| Breaking Capacity | 100 kA Icu at 220240 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 50 kA Icu at 380415 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 50 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 15 kA Icu at 525 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 65 kA at 208Y/120 V AC 50/60 Hz conforming to UL 60947 |
| | 65 kA at 240 V AC 50/60 Hz conforming to UL 60947 |
| | 35 kA at 480Y/277 V AC 50/60 Hz conforming to UL 60947 |
| | 8 kA Icu at 660690 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 25 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 |
| | 18 kA at 600Y/347 V AC 50/60 Hz conforming to UL 60947 |
| Control Type | Toggle |
| [In] Rated Current | 25 A |
| Magnetic Tripping Current | 425 A |
| [Ue] Rated Operational Voltage | 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ui] Rated Insulation Voltage | 800 V AC 50/60 Hz conforming to IEC 60947-2 |

| [Ith] Conventional Free Air Thermal Current | 115 A conforming to IEC 60947-4-1 |
|--|---|
| [Uimp] Rated Impulse Withstand Voltage | 8 kV conforming to IEC 60947-2 |
| Power Dissipation Per Pole | 4.6 W |
| Mechanical Durability | 40000 cycles |
| Electrical Durability | 40000 cycles for AC-3 at 440 V In/2 20000 cycles for AC-3 at 440 V In |
| Maximum Operating Rate | 25 cyc/h |
| Rated Duty | Continuous conforming to IEC 60947-4-1 |
| Connections - Terminals | EverLink BTR screw connectors (top) 1 cable(s) 1.570 mm² - solid EverLink BTR screw connectors (top) 1 cable(s) 1.550 mm² - flexible EverLink BTR screw connectors (bottom) 1 cable(s) 2.595 mm² - solid EverLink BTR screw connectors (bottom) 1 cable(s) 2.570 mm² - flexible |
| Tightening Torque | 9 N.m for cable 1695 mm ² 5 N.m for cable 1.510 mm ² |
| Mechanical Robustness | Vibrations: +/- 1 mm 213.2 Hz conforming to IEC 60068-2-6 Vibrations: 0.7 gn 13.2100 Hz conforming to IEC 60068-2-6 Shocks: 15 gn 11 ms conforming to IEC 60068-2-27 |
| Phase Failure Sensitivity | Yes conforming to IEC 60947-4-1 |
| Height | 155 mm |
| Width | 81 mm |
| Depth | 116 mm |
| Net Weight | 1.45 kg |
| Colour | Grey (RAL 7016) |
| Suitability For Isolation | Yes conforming to IEC 60947-1 |
| Environment | |
| Standards | CSA C22.2 No 60947-4-1 UL 60947-4-1 EN/IEC 60947-4-1 EN/IEC 60947-2 |
| Product Certifications | IEC UL CSA CCC EAC ATEX EU-RO MR |
| Climatic Withstand | conforming to IACS E10 |
| Ik Degree Of Protection | IK07 conforming to IEC 62262 |
| Pollution Degree | 3 |
| Ip Degree Of Protection | IP40 conforming to IEC 60529 |
| Ambient Air Temperature For Storage | -5085 °C |
| Fire Resistance | 960 °C conforming to IEC 60695-2-11 |
| Operating Altitude | 5000 m |
| Ambient Air Temperature For Operation | -2570 °C |
| Packing Units | |
| | |

PCE

Unit Type Of Package 1

| Number Of Units In Package 1 | 1 |
|------------------------------|---------|
| Package 1 Height | 17.0 cm |
| Package 1 Width | 11.0 cm |
| Package 1 Length | 22.0 cm |
| Package 1 Weight | 1.67 kg |
| Unit Type Of Package 2 | S03 |
| Number Of Units In Package 2 | 5 |
| Package 2 Height | 30.0 cm |
| Package 2 Width | 30.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 9.0 kg |

Contractual warranty

Warranty 18 months

Sustainability Green Premium*

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

| ⊘ | Mercury Free |
|----------|------------------------------------|
| ② | Rohs Exemption Information Yes |
| ② | Pvc Free |
| ⊘ | Halogen Free Plastic Parts Product |


Certifications & Standards

| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Compliant with Exemptions |
| China Rohs Regulation | China RoHS declaration Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | End of Life Information |

Performance Curves

Thermal-Magnetic Tripping Curves for GV4P, GV4PE, GV4PEM

Average Operating Times at 20 $^{\circ}\text{C}$ Related to Multiples of the Setting Current Hot state

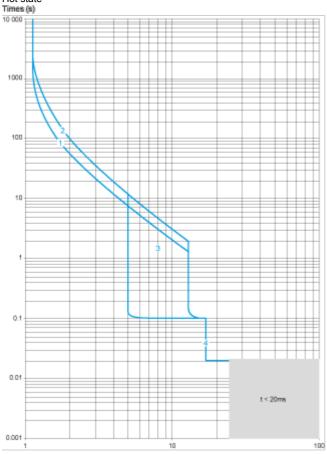


X the setting current in

- 1 Class 10
- 2 Class 20
- 3 lsd = 5...13x lr
- 4 li = 17 ln

Cold state

Product datasheet

GV4PE25N

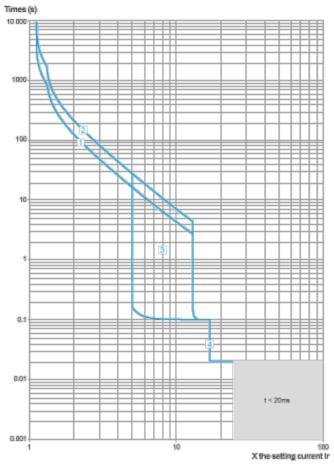


- 1 Class 10
- 2 Class 20
- 3 Isd = 5...13x Ir
- 4 li = 17 ln

Current Limitation on Short-Circuit for GV4P, GV4PE, GV4PEM (3-Phase 400/415 V)

Dynamic Stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V

GV4PE25N

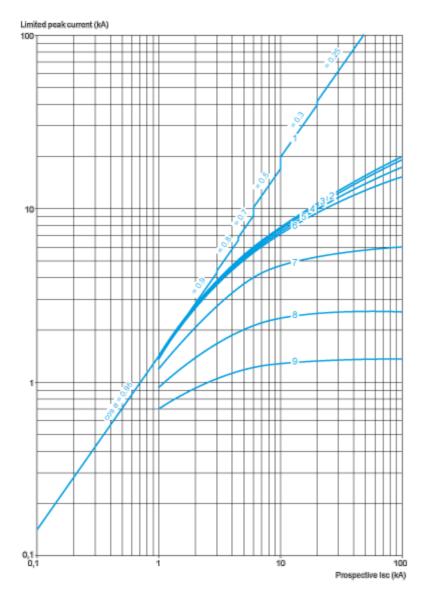

- 1 Maximum peak current
- 2 GV4P115
- 3 GV4P80
- 4 GV4P50
- 5 GV4P25
- 6 GV4P12
- 7 GV4P07
- 8 GV4P03
- 9 GV4P02


Thermal Limit on Short-Circuit for GV4P, GV4PE, GV4PEM

Thermal Limit in kA²2s in the Magnetic Operating Zone

Sum of I^2 dt = f (prospective lsc) at 1.05 Ue = 435 V

Product datasheet

GV4PE25N

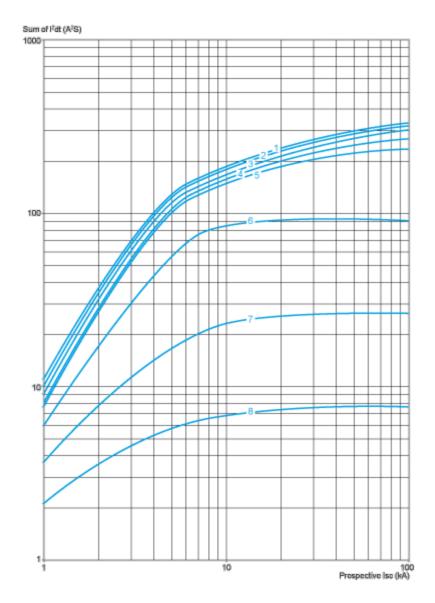


- GV4P115 1
- GV4P80 2
- GV4P50 3
- 4 GV4P25
- GV4P12 5
- GV4P07 6
- GV4P03 7
- GV4P02 8


Dimensions Drawings

GV4 with Toggle: GV4LE, GV4PE, GV4PEM

With EverLink® Connector

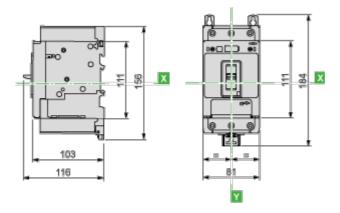


With Crimp Lug Connector



GV4 with Rotary Handle: GV4L, GV4P, or GV4LE, GV4PE, GV4PEM with GV4ADN01, GV4ADN02 Direct Mounting Rotary Handle


Dimensions

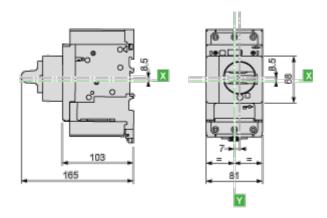


GV4L, GV4P, GV4LE, GV4PE, GV4PEM

Panel Mounting with M4 Screws


GV4PE25N



Door Cut-Out for Rotary Handle



Minimum Safety Clearance



Toggle-type, rotary handle-type: identical clearance values.

| Safety Clearance (mm) | | | | | | |
|-----------------------|-------------|------------------|---|----|---|---|
| | Painted She | Bare Sheet Metal | | | | |
| | Α | В | С | Α | В | С |
| No accessory | 30 | 0 | 0 | 40 | 0 | 5 |
| Interphase barriers | 0 | 0 | 0 | 0 | 0 | 5 |
| Long terminal shield | 0 | 0 | 0 | 0 | 0 | 5 |

Connections and Schema

Magnetic Motor Circuit Breakers GV4P, GV4PE, GV4PEM

