Product datasheet

Specifications





Solid state modular relay, 6 A, random switching, input 200...265 V AC, output 24...280 V AC

SSM1A16P7R

() Discontinued on: 1 Oct 2020

① Discontinued

EAN Code: 3606480579431

Main

Range Of Product	Harmony Relay
Product Or Component Type	Solid state relay
Device Short Name	SSM
Number Of Channels	1
Number Of Phases	1 phase

Complementary

Complementary	
Mounting Support	Symmetrical DIN rail
[In] Rated Current	6 A
Output Voltage	24280 V AC
[Uc] Control Circuit Voltage	200265 V AC
Contacts Type And Configuration	1 NO
Tightening Torque	0.50.8 N.m for input 0.50.8 N.m for output
Connections - Terminals	Screw terminals: 1 x 0.31 x 1.5 mm ² , (AWG 22AWG 16) for input Screw terminals: 1 x 0.31 x 2.5 mm ² , (AWG 22AWG 14) for output
Maximum Capacitance	10 pF for input/output
Insulation Resistance	1000 MOhm at 500 V DC
Local Signalling	LED (green) for input status
Minimum Switching Voltage	200 V AC turn-on
Maximum Switching Voltage	90 V AC turn-off
Input Current	2.53.5 mA
Solid State Output Type	SCR output Random voltage switching
Load Current	0.156 A
Transient Overvoltage	600 V
Surge Current	285 A for 16.6 ms 300 A for 20 ms
Maximum Voltage Drop	<1.3 V on-state
Motor Power Hp	0.16 hp 40 °C 240 V AC
Maximum I ² T For Fusing	410 A ² .s for 10 ms at 50 Hz 375 A ² .s for 8.33 ms at 60 Hz
Maximum Leakage Current	0.1 mA off-state

Dv/Dt	500 V/µs off-state at maximum voltage	
Response Time	30 ms (turn-off) 20 ms (turn-on)	
Power Factor	0.5 (with maximum load)	
Overvoltage Category	III	
Width	11 mm	
Height	90.3 mm	
Depth	83.7 mm	
Net Weight	0.05 kg	

Environment

Flame Retardance	V0 conforming to UL 94
Dielectric Strength	4 kV AC for input/output 4 kV AC for input or output to case
Pollution Degree	2
Standards	IEC 61000 IEC 60950-1 IEC 62314
Product Certifications	UL CSA
Marking	CE
Ip Degree Of Protection	IP20
Ambient Air Temperature For Operation	-3080 °C
Ambient Air Temperature For Storage	-30100 °C

Packing Units

-	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2 cm
Package 1 Width	9 cm
Package 1 Length	9 cm
Package 1 Weight	74 g

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc
Mercury Free
Rohs Exemption Information Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Product datasheet


Dimensions Drawings

Dimensions

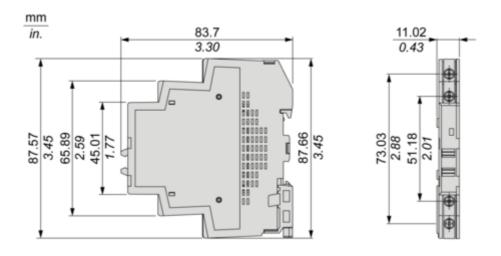

Performance Curves

Derating Curves

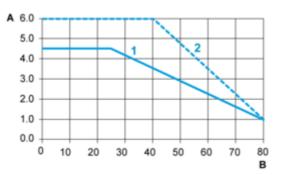

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 11 mm