
Product data sheet

Specifications

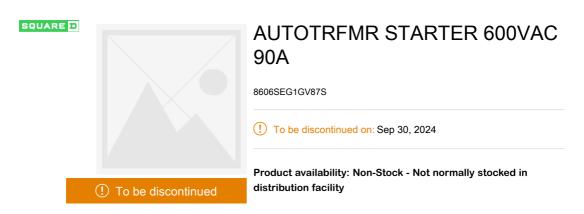

Main

Device Short Name

Complementary

s

[Ue] Rated Operational Voltage	480 V AC
[Uc] Control Circuit Voltage	240 V AC
Depth	16 in (406.40 mm)
Device Mounting	Surface
Height	70 in (1778.00 mm)
Maximum Horse Power Rating	30 hp
Nema Size	3
Number Of Poles	3
Number Of Thermal Units Required	3
Net Weight	490 lb(US) (222.26 kg)
Width	32 in (812.80 mm)

Environment

Nema Degree Of Protection	NEMA 1
Product Certifications	UL listed file E70074 CCN NLDX

Ordering and shipping details

Category	21231 - 8606 (NOT S*K)
Discount Schedule	CP1
Returnability	No
Country Of Origin	MX

Packing Units

Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	70.00 in (177.8 cm)	
Package 1 Width	32.01 in (81.3 cm)	
Package 1 Length	15.98 in (40.6 cm)	

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Package 1 Weight

525.00 lb(US) (238.136 kg)

2

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Eu Rohs Directive	Not compliant
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov