Product data sheet

Specifications





backplane rack, Modicon X80, 6 slots, redundant Ethernet backplane

BMEXBP0602

Product availability: Stock - Normally stocked in distribution facility

Main

Range Of Product	Modicon X80
Accessory / Separate Part Type	Rack

Complementary

Number Of Slots 6 bus X + Ethernet		
Product Compatibility	Specific application module	
	BMX processor	
	I/O module	
	BME processor	
	BMXCPS4002	
Power Consumption In W	191 mW 3.3 V DC	
·	3.6 W 24 V DC	
Electrical Connection	1 connector (XBE) expansion module	
Fixing Mode	By 4 screws 0.170.25 in (4.326.35 mm) panel	
	By 4 M6 screws plate	
	By clips 35 mm symmetrical DIN rail	
Current Consumption	152 mA 24 V DC	
	58 mA 3.3 V DC	
Mtbf Reliability	1353797 H	
Net Weight	2.25 lb(US) (1.02 kg)	

Environment

Ip Degree Of Protection	IP20	
Ambient Air Temperature For Operation	32140 °F (060 °C)	
Relative Humidity	595 % without condensation	
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility	

Ordering and shipping details

Category	US1PC3418160	
Discount Schedule	PC34	
Gtin	3606480911743	
Returnability	Yes	
Country Of Origin	US	

Packing Units

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	2.64 in (6.700 cm)	
Package 1 Width	5.98 in (15.200 cm)	
Package 1 Length	17.95 in (45.600 cm)	
Package 1 Weight	2.22 lb(US) (1.007 kg)	
Unit Type Of Package 2	S04	
Number Of Units In Package 2	9	
Package 2 Height	11.81 in (30.000 cm)	
Package 2 Width	15.75 in (40.000 cm)	
Package 2 Length	23.62 in (60.000 cm)	
Package 2 Weight	22.07 lb(US) (10.010 kg)	

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free


Rohs Exemption Information
Yes

Certifications & Standards

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	
Weee Circularity Profile		

Dimensions Drawings

Dimensions

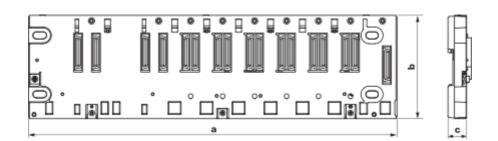

Dimensions in mm

а			
Empty Rack	Rack With Extender Module Mounted	b	с
375.80		^{105.11} NOTE: Overall height is 134.6 with a CPU mounted.	19

Dimensions in in.

а			
Empty Rack	Rack With Extender Module Mounted	b	с
14.80		^{4.14} NOTE: Overall height is 5.30 with a CPU mounted.	0.75


Product data sheet

BMEXBP0602

Mounting and Clearance

Minimum Clearance

Minimum Clearance of a typical installation in a cabinet with ducts

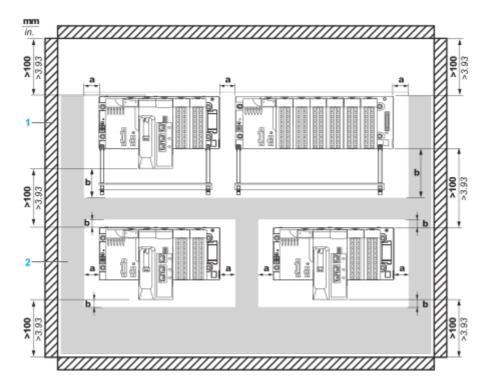


a Side clearance: > 40 mm (1.57 in.)

b Top and bottom clearance with surrounding objects: > 20 mm (0.79 in.)


1 Installation or casing

2 Wiring duct or tray

Mounting a Rack on a DIN rail



Mounting and Fastening the Rack on Panels

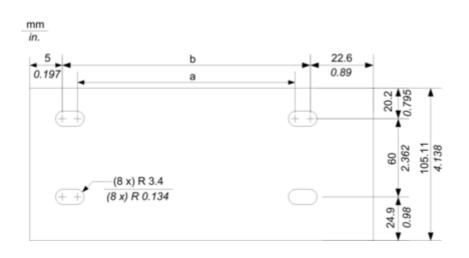


NOTE: You can use M4, M5, M6, or UNC #6 screws in the fastening holes.

Dimensions in mm		
а	b	
332.5	345.2	

Dimensions in in.

а	b
13.09	13.59

Mounting on Telequick Grid AM1-PA and AM3-PA Mounting Grids

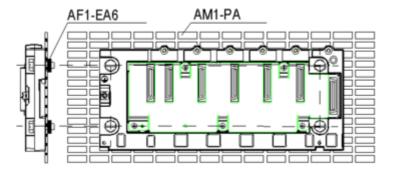

Fasten the rack with four M4, M5, M6 or UNC #6 screws