Product data sheet

Specification





AC servo motor BSH, Lexium 05, 3.39N.m, 4000rpm, keyed shaft, with brake, IP65

BSH1001T32F1A

! Discontinued on: Jun 30, 2023

! Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

| Product Or Component Type | Servo motor |
|---------------------------|--|
| Device Short Name | BSH |
| Maximum Mechanical Speed | 6000 rpm |
| Continuous Stall Torque | 29.21 lbf.in (3.3 N.m) LXM32.D30M2 10 A, 115 V, single phase |
| | 30.00 lbf.in (3.39 N.m) LXM15LD28M3, 230 V, three phase |
| | 30.09 lbf.in (3.4 N.m) LXM05AD28F1, 110120 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05AD28M2, 200240 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05AD42M3X, 200240 V, three phase |
| | 30.09 lbf.in (3.4 N.m) LXM05BD28F1, 110120 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05BD28M2, 200240 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05BD42M3X, 200240 V, three phase |
| | 30.09 lbf.in (3.4 N.m) LXM05CD28F1, 110120 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05CD28M2, 200240 V, single phase |
| | 30.09 lbf.in (3.4 N.m) LXM05CD42M3X, 200240 V, three phase |
| | 23.90 lbf.in (2.7 N.m) LXM32.D18M2 6 A, 230 V, single phase |
| Peak Stall Torque | 55.76 lbf.in (6.3 N.m) LXM32.D30M2 10 A, 115 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05AD28F1, 110120 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05AD28M2, 200240 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05BD28F1, 110120 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05BD28M2, 200240 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05CD28F1, 110120 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM05CD28M2, 200240 V, single phase |
| | 66.38 lbf.in (7.5 N.m) LXM32.D18M2 6 A, 230 V, single phase |
| | 75.23 lbf.in (8.5 N.m) LXM15LD28M3, 230 V, three phase |
| | 75.23 lbf.in (8.5 N.m) LXM05AD42M3X, 200240 V, three phase |
| | 75.23 lbf.in (8.5 N.m) LXM05BD42M3X, 200240 V, three phase |
| | 75.23 lbf.in (8.5 N.m) LXM05CD42M3X, 200240 V, three phase |
| Nominal Output Power | 700 W LXM32.D30M2 10 A, 115 V, single phase |
| | 900 W LXM32.D18M2 6 A, 230 V, single phase |
| | 500 W LXM05AD28F1, 110120 V, single phase |
| | 500 W LXM05BD28F1, 110120 V, single phase |
| | 500 W LXM05CD28F1, 110120 V, single phase |
| | 900 W LXM05AD28M2, 200240 V, single phase |
| | 900 W LXM05BD28M2, 200240 V, single phase |
| | 900 W LXM05CD28M2, 200240 V, single phase |
| | 1150 W LXM15LD28M3, 230 V, three phase 900 W LXM05AD42M3X, 200240 V, three phase |
| | 900 W LXM05BD42M3X, 200240 V, three phase |
| | 900 W LXM05CD42M3X, 200240 V, three phase |
| Name to all Tamasa | · |
| Nominal Torque | 24.34 lbf.in (2.75 N.m) LXM32.D30M2 10 A, 115 V, single phase |
| | 25.67 lbf.in (2.9 N.m) LXM05AD28M2, 200240 V, single phase |
| | 25.67 lbf.in (2.9 N.m) LXM05BD28M2, 200240 V, single phase |
| | 25.67 lbf.in (2.9 N.m) LXM05CD28M2, 200240 V, single phase |
| | 27.97 lbf.in (3.16 N.m) LXM05AD28F1, 110120 V, single phase 27.97 lbf.in (3.16 N.m) LXM05BD28F1, 110120 V, single phase |
| | · · · · · · · · · · · · · · · · · · · |
| | 27.97 lbf.in (3.16 N.m) LXM05CD28F1, 110120 V, single phase 19.47 lbf.in (2.2 N.m) LXM32.D18M2 6 A, 230 V, single phase |
| | 24.34 lbf.in (2.75 N.m) LXM15LD28M3, 230 V, three phase |
| | 24.34 Ibi.in (2.75 N.m) LXM15LD26M3, 230 V, tiffee priase 25.67 lbf.in (2.9 N.m) LXM05AD42M3X, 200240 V, three phase |
| | 25.67 lbf.in (2.9 N.m) LXM05BD42M3X, 200240 V, three phase |
| | 25.67 lbf.in (2.9 N.m) LXM05CD42M3X, 200240 V, three phase |
| | 20.0 (2.0 14.11) Extito 00 12.1107, 200270 V, till 00 pilado |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Apr 19, 2024 Life Is On Schneider

| - | |
|--|--|
| Nominal Speed Product Compatibility | 2500 rpm LXM32.D30M2 10 A, 115 V, single phase 3000 rpm LXM05AD28M2, 200240 V, single phase 3000 rpm LXM05BD28M2, 200240 V, single phase 3000 rpm LXM05CD28M2, 200240 V, single phase 3000 rpm LXM05AD42M3X, 200240 V, three phase 3000 rpm LXM05AD42M3X, 200240 V, three phase 3000 rpm LXM05CD42M3X, 200240 V, three phase 3000 rpm LXM05CD42M3X, 200240 V, three phase 4000 rpm LXM05CD42M3X, 200240 V, single phase 1500 rpm LXM05AD28F1, 110120 V, single phase 1500 rpm LXM05BD28F1, 110120 V, single phase 1500 rpm LXM05CD28F1, 110120 V, single phase 4000 rpm LXM15LD28M3, 230 V, three phase LXM05AD28F1 110120 V single phase LXM05AD28M2 200240 V single phase LXM05BD28M2 200240 V single phase LXM05BD28M2 110120 V single phase LXM05BD28M1 200240 V single phase LXM05BD28M1 200240 V single phase LXM05CD28F1 110120 V single phase |
| | LXM05CD28M2 200240 V single phase LXM32.D30M2 115 V single phase LXM32.D18M2 230 V single phase LXM05AD42M3X 200240 V three phase LXM05BD42M3X 200240 V three phase LXM05CD42M3X 200240 V three phase LXM05CD42M3X 200240 V three phase LXM15LD28M3 230 V three phase |
| Shaft End | Keyed |
| Ip Degree Of Protection | IP65 standard IP67 with IP67 kit |
| Speed Feedback Resolution | 131072 points/turn x 4096 turns |
| Holding Brake | With |
| Mounting Support | International standard flange |
| Electrical Connection | Straight connectors |
| Complementary | |
| | |
| Range Compatibility | Lexium 15 Lexium 05 Lexium 32 |
| Range Compatibility Supply Voltage Max | Lexium 05 |
| | Lexium 05 Lexium 32 |
| Supply Voltage Max | Lexium 05 Lexium 32 480 V |
| Supply Voltage Max Phase | Lexium 05 Lexium 32 480 V Three phase |
| Supply Voltage Max Phase Continuous Stall Current | Lexium 05 Lexium 32 480 V Three phase 7.3 A |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05AD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency Second Shaft | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X 25.1 A LXM05CD42M3X |
| Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency Second Shaft Shaft Diameter | Lexium 05 Lexium 32 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X 25.1 A 8 kHz Without second shaft end 0.75 in (19 mm) |

| Holding Torque | 79.66 lbf.in (9 N.m) holding brake | | | | | |
|---------------------------------------|--|--|--|--|--|--|
| Motor Flange Size | 3.94 in (100 mm) | | | | | |
| Number Of Motor Stacks | 1 | | | | | |
| Torque Constant | 0.45 N.m/A 248 °F (120 °C) | | | | | |
| Back Emf Constant | 29 V/krpm 248 °F (120 °C) | | | | | |
| Number Of Motor Poles | 8 | | | | | |
| Rotor Inertia | 2.018 kg.cm ² | | | | | |
| Stator Resistance | 0.87 Ohm 68 °F (20 °C) | | | | | |
| Stator Inductance | 4 mH 68 °F (20 °C) | | | | | |
| Stator Electrical Time Constant | 4.6 ms 68 °F (20 °C) | | | | | |
| Maximum Radial Force Fr | 530 N 5000 rpm 570 N 4000 rpm 630 N 3000 rpm 720 N 2000 rpm 900 N 1000 rpm | | | | | |
| Maximum Axial Force Fa | 0.2 x Fr | | | | | |
| Brake Pull-In Power | 18 W | | | | | |
| Type Of Cooling | Natural convection | | | | | |
| Length | 7.85 in (199.5 mm) | | | | | |
| Centring Collar Diameter | 3.74 in (95 mm) | | | | | |
| Centring Collar Depth | 0.14 in (3.5 mm) | | | | | |
| Number Of Mounting Holes | 4 | | | | | |
| Mounting Holes Diameter | 0.35 in (9 mm) | | | | | |
| Circle Diameter Of The Mounting Holes | 4.53 in (115 mm) | | | | | |
| Net Weight | 10.58 lb(US) (4.8 kg) | | | | | |

Ordering and shipping details

| Category | US1PC5318282 |
|-------------------|---------------|
| Discount Schedule | PC53 |
| Gtin | 3389118138759 |
| Returnability | No |
| Country Of Origin | DE |

Packing Units

| Unit Type Of Package 1 | PCE | | | | | |
|------------------------------|------------------------|--|--|--|--|--|
| Number Of Units In Package 1 | 1 | | | | | |
| Package 1 Height | 6.06 in (15.4 cm) | | | | | |
| Package 1 Width | 6.42 in (16.3 cm) | | | | | |
| Package 1 Length | 16.02 in (40.7 cm) | | | | | |
| Package 1 Weight | 10.91 lb(US) (4.95 kg) | | | | | |

Contractual warranty

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


| Reach Regulation | REACh Declaration | | | | | |
|---------------------------|---|--|--|--|--|--|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) | | | | | |
| China Rohs Regulation | China RoHS declaration | | | | | |
| Environmental Disclosure | Product Environmental Profile | | | | | |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. | | | | | |
| Circularity Profile | No need of specific recycling operations | | | | | |
| California Proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov | | | | | |

BSH1001T32F1A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

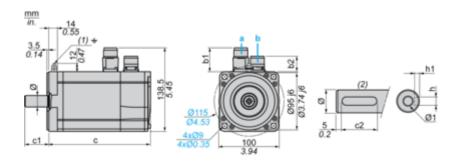

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

| Straight connectors | | Rotatable angled connectors | | c (without | c (with | c1 | c2 | h | h1 | Ø | Ø1 for |
|---------------------|------|-----------------------------|------|------------|---------|----|----|---------|----------------------------------|----------|---------|
| b1 | b2 | b1 | b2 | brake) | brake) | | | | | | screws |
| 39.5 | 25.5 | 39.5 | 39.5 | 169 | 200 | 40 | 30 | 6 N9 | 3.5 ^{+0.1} ₀ | 19 k6 | M6 x 16 |

Dimensions in in.

| Straight connectors | | Rotatable angled connectors | | c (without | c (with | c1 | c2 | h | h1 | Ø | Ø1 for |
|---------------------|------|-----------------------------|------|------------|---------|------|------|------------|------------------------|------------|--------------|
| b1 | b2 | b1 | b2 | brake) | brake) | | | | | | screws |
| 1.55 | 1.00 | 1.55 | 1.55 | 6.65 | 7.87 | 1.57 | 1.18 | 0.24 N9 | 0.14 ^{+0.1} 0 | 0.75 k6 | M6 x 0.63 |


BSH1001T32F1A

Performance Curves

115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive




- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque