Product data sheet

Specifications





servo motor BSH, Lexium 05, 7.8N.m, 2500rpm, 100mm, keyed shaft, Sincos single turn, without brake, IP50, straight

BSH1003P11A1A

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 1,690.00 USD

Main

Mann							
Product Or Component Type	Servo motor						
Device Short Name	BSH						
Maximum Mechanical Speed	6000 rpm						
Continuous Stall Torque	70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 400 V, three phase						
	70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05CD28M2, 200240 V, single phase						
	69.04 lbf.in (7.8 N.m) LXM05AD28M2, 200240 V, single phase						
	69.04 lbf.in (7.8 N.m) LXM05BD28M2, 200240 V, single phase						
	69.04 lbf.in (7.8 N.m) LXM05BD34N4, 380480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05BD42M3X, 200240 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05CD34N4, 380480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05CD42M3X, 200240 V, three phase						
	59.30 lbf.in (6.7 N.m) LXM15LD21M3, 230 V, three phase						
	59.30 lbf.in (6.7 N.m) LXM15LD17N4, 230 V, three phase						
	59.30 lbf.in (6.7 N.m) LXM15LD17N4, 400 V, three phase						
	59.30 lbf.in (6.7 N.m) LXM15LD17N4, 480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM15LD28M3, 230 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM15MD28N4, 400 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM15MD28N4, 480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM15MD40N4, 400 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM15MD40N4, 480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05AD34N4, 380480 V, three phase						
	69.04 lbf.in (7.8 N.m) LXM05AD42M3X, 200240 V, three phase						
Peak Stall Torque	250.48 lbf.in (28.3 N.m) LXM32.D30N4 10 A, 400 V, three phase						
	250.48 lbf.in (28.3 N.m) LXM32.D30N4 10 A, 480 V, three phase						
	174.27 lbf.in (19.69 N.m) LXM05AD28M2, 200240 V, single phase						
	174.27 lbf.in (19.69 N.m) LXM05BD28M2, 200240 V, single phase						
	174.27 lbf.in (19.69 N.m) LXM05CD28M2, 200240 V, single phase						
	137.19 lbf.in (15.5 N.m) LXM15LD21M3, 230 V, three phase						
	110.63 lbf.in (12.5 N.m) LXM15LD17N4, 230 V, three phase						
	110.63 lbf.in (12.5 N.m) LXM15LD17N4, 400 V, three phase						
	110.63 lbf.in (12.5 N.m) LXM15LD17N4, 480 V, three phase						
	174.27 lbf.in (19.69 N.m) LXM15LD28M3, 230 V, three phase						
	174.27 lbf.in (19.69 N.m) LXM15MD28N4, 400 V, three phase						
	174.27 lbf.in (19.69 N.m) LXM15MD28N4, 480 V, three phase						
	205.07 lbf.in (23.17 N.m) LXM15MD40N4, 400 V, three phase						
	205.07 lbf.in (23.17 N.m) LXM15MD40N4, 480 V, three phase						
	203.66 lbf.in (23.01 N.m) LXM05AD34N4, 380480 V, three phase						
	205.07 lbf.in (23.17 N.m) LXM05AD42M3X, 200240 V, three phase						
	203.66 lbf.in (23.01 N.m) LXM05BD34N4, 380480 V, three phase						
	205.07 lbf.in (23.17 N.m) LXM05BD42M3X, 200240 V, three phase						
	203.66 lbf.in (23.01 N.m) LXM05CD34N4, 380480 V, three phase						
	205.07 lbf.in (23.17 N.m) LXM05CD42M3X, 200240 V, three phase						

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Life Is On Schneider

000 W LXM32.D30N4 10 A, 400 V, three phase 600 W LXM32.D30N4 10 A, 480 V, three phase 100 W LXM05AD28M2, 200240 V, single phase 100 W LXM05BD28M2, 200240 V, single phase 100 W LXM05CD28M2, 200240 V, single phase 100 W LXM05AD42M3X, 200240 V, three phase 100 W LXM05BD42M3X, 200240 V, three phase 100 W LXM05CD42M3X, 200240 V, three phase								
100 W LXM05AD28M2, 200240 V, single phase 100 W LXM05BD28M2, 200240 V, single phase 100 W LXM05CD28M2, 200240 V, single phase 100 W LXM05AD42M3X, 200240 V, three phase 100 W LXM05BD42M3X, 200240 V, three phase								
100 W LXM05BD28M2, 200240 V, single phase 100 W LXM05CD28M2, 200240 V, single phase 100 W LXM05AD42M3X, 200240 V, three phase 100 W LXM05BD42M3X, 200240 V, three phase								
100 W LXM05CD28M2, 200240 V, single phase 100 W LXM05AD42M3X, 200240 V, three phase 100 W LXM05BD42M3X, 200240 V, three phase								
100 W LXM05AD42M3X, 200240 V, three phase 100 W LXM05BD42M3X, 200240 V, three phase								
100 W LXM05BD42M3X, 200240 V, three phase								
100 W LXM05CD42M3X, 200240 V, three phase								
300 W LXM15LD28M3, 230 V, three phase								
700 W LXM15LD17N4, 230 V, three phase								
700 W LXM15LD21M3, 230 V, three phase								
800 W LXM05AD34N4, 380480 V, three phase								
800 W LXM05BD34N4, 380480 V, three phase								
800 W LXM05CD34N4, 380480 V, three phase								
000 W LXM15MD28N4, 400 V, three phase								
000 W LXM15MD40N4, 400 V, three phase								
200 W LXM15LD17N4, 400 V, three phase								
200 W LXM15MD28N4, 480 V, three phase								
200 W LXM15MD40N4, 480 V, three phase								
300 W LXM15LD17N4, 480 V, three phase								
5.76 lbf.in (6.3 N.m) LXM32.D30N4 10 A, 400 V, three phase								
5.76 lbf.in (6.3 N.m) LXM32.D30N4 10 A, 480 V, three phase								
2.75 lbf.in (3.7 N.m) LXM15LD17N4, 480 V, three phase								
9.57 lbf.in (6.73 N.m) LXM05AD28M2, 200240 V, single phase								
9.57 lbf.in (6.73 N.m) LXM05BD28M2, 200240 V, single phase								
9.57 lbf.in (6.73 N.m) LXM05CD28M2, 200240 V, single phase								
0.71 lbf.in (4.6 N.m) LXM15MD28N4, 480 V, three phase								
40.71 lbf.in (4.6 N.m) LXM15MD40N4, 480 V, three phase 41.60 lbf.in (4.7 N.m) LXM15LD17N4, 400 V, three phase 44.25 lbf.in (5 N.m) LXM15LD28N4, 400 V, three phase								
								4.25 lbf.in (5 N.m) LXM15MD40N4, 400 V, three phase
								0.45 lbf.in (5.7 N.m) LXM05AD34N4, 380480 V, three phase
0.45 lbf.in (5.7 N.m) LXM05BD34N4, 380480 V, three phase								
0.45 lbf.in (5.7 N.m) LXM05CD34N4, 380480 V, three phase								
3.10 lbf.in (6 N.m) LXM15LD17N4, 230 V, three phase								
3.10 lbf.in (6 N.m) LXM15LD21M3, 230 V, three phase								
5.76 lbf.in (6.3 N.m) LXM15LD28M3, 230 V, three phase								
9.57 lbf.in (6.73 N.m) LXM05AD42M3X, 200240 V, three phase								
9.57 lbf.in (6.73 N.m) LXM05BD42M3X, 200240 V, three phase								
9.57 lbf.in (6.73 N.m) LXM05CD42M3X, 200240 V, three phase								
000 rpm LXM32.D30N4 10 A, 400 V, three phase								
000 rpm LXM32.D30N4 10 A, 480 V, three phase								
500 rpm LXM15LD17N4, 400 V, three phase								
000 rpm LXM15LD17N4, 480 V, three phase								
500 rpm LXM05AD28M2, 200240 V, single phase								
500 rpm LXM05BD28M2, 200240 V, single phase								
500 rpm LXM05CD28M2, 200240 V, single phase								
500 rpm LXM05AD42M3X, 200240 V, three phase								
500 rpm LXM05BD42M3X, 200240 V, three phase								
500 rpm LXM05CD42M3X, 200240 V, three phase								
UUU IDIII LAIVI IDLDZOIVID. ZOU V. UIIEE DIIASE								
000 rpm LXM15LD28M3, 230 V, three phase 500 rpm LXM15LD17N4_230 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase 000 rpm LXM05BD34N4, 380480 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase 000 rpm LXM05BD34N4, 380480 V, three phase 000 rpm LXM05CD34N4, 380480 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase 000 rpm LXM05BD34N4, 380480 V, three phase 000 rpm LXM05CD34N4, 380480 V, three phase 000 rpm LXM15MD28N4, 400 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase 000 rpm LXM05BD34N4, 380480 V, three phase 000 rpm LXM05CD34N4, 380480 V, three phase 000 rpm LXM15MD28N4, 400 V, three phase 000 rpm LXM15MD40N4, 400 V, three phase								
500 rpm LXM15LD17N4, 230 V, three phase 500 rpm LXM15LD21M3, 230 V, three phase 000 rpm LXM05AD34N4, 380480 V, three phase 000 rpm LXM05BD34N4, 380480 V, three phase 000 rpm LXM05CD34N4, 380480 V, three phase 000 rpm LXM15MD28N4, 400 V, three phase								

Product Compatibility	LXM05AD28M2 200240 V single phase
	LXM05BD28M2 200240 V single phase
	LXM05CD28M2 200240 V single phase
	LXM15LD21M3 230 V three phase
	LXM05AD42M3X 200240 V three phase
	LXM05BD42M3X 200240 V three phase
	LXM05CD42M3X 200240 V three phase
	LXM15LD17N4 230 V three phase
	LXM15LD17N4 400 V three phase
	LXM15LD17N4 480 V three phase
	LXM15LD28M3 230 V three phase
	LXM05AD34N4 380480 V three phase
	LXM05BD34N4 380480 V three phase
	LXM05CD34N4 380480 V three phase
	LXM15MD28N4 400 V three phase
	LXM15MD28N4 480 V three phase
	LXM15MD40N4 400 V three phase
	LXM15MD40N4 480 V three phase
	LXM32.D30N4 400 V three phase
	LXM32.D30N4 480 V three phase
Shaft End	Keyed
Ip Degree Of Protection	IP50 standard
Speed Feedback Resolution	131072 points/turn
Holding Brake	Without
Mounting Support	International standard flange
Electrical Connection	Straight connectors

Complementary

Range Compatibility	Lexium 32						
	Lexium 15						
	Lexium 05						
	Lexium 05						
Supply Voltage Max	480 V						
Phase	Three phase						
Continuous Stall Current	6.6 A						
Maximum Continuous Power	3.14 W						
Maximum Current Irms	28.3 A LXM15LD21M3						
	28.3 A LXM15LD28M3						
	28.3 A LXM15LD17N4						
	28.3 A LXM15MD28N4						
	28.3 A LXM15MD40N4						
	28.3 A LXM05AD28M2						
	28.3 A LXM05AD42M3X						
	28.3 A LXM05AD34N4						
	28.3 A LXM05BD28M2						
	28.3 A LXM05BD42M3X						
	28.3 A LXM05BD34N4						
	28.3 A LXM05CD28M2						
	28.3 A LXM05CD42M3X						
	28.3 A LXM05CD34N4						
	28.3 A LXM32.D30N4						
Maximum Permanent Current	28.3 A						
	20.07						
Switching Frequency	8 kHz						
Second Shaft	Without second shaft end						
Shaft Diameter	0.75 in (19 mm)						
Shaft Length	1.57 in (40 mm)						
Key Width	1.18 in (30 mm)						
Feedback Type	Single turn SinCos Hiperface						
Motor Flange Size	3.94 in (100 mm)						

Number Of Motor Stacks	3						
Torque Constant	1.22 N.m/A 248 °F (120 °C)						
Back Emf Constant	77 V/krpm 248 °F (120 °C)						
Number Of Motor Poles	8						
Rotor Inertia	3.22 kg.cm ²						
Stator Resistance	1.43 Ohm 68 °F (20 °C)						
Stator Inductance	8.8 mH 68 °F (20 °C)						
Stator Electrical Time Constant	6.15 ms 68 °F (20 °C)						
Maximum Radial Force Fr	1050 N 1000 rpm 660 N 4000 rpm 730 N 3000 rpm 830 N 2000 rpm						
Maximum Axial Force Fa	0.2 x Fr						
Type Of Cooling	Natural convection						
Length	9.47 in (240.5 mm)						
Centring Collar Diameter	3.74 in (95 mm)						
Centring Collar Depth	0.14 in (3.5 mm)						
Number Of Mounting Holes	4						
Mounting Holes Diameter	0.35 in (9 mm)						
Circle Diameter Of The Mounting Holes	4.53 in (115 mm)						
Net Weight	16.31 lb(US) (7.4 kg)						

Ordering and shipping details

Category	US1PC5318282
Discount Schedule	PC53
Gtin	3389118140219
Returnability	No
Country Of Origin	DE

Packing Units

U	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.27 in (21 cm)
Package 1 Width	7.20 in (18.3 cm)
Package 1 Length	22.44 in (57 cm)
Package 1 Weight	17.55 lb(US) (7.96 kg)
Unit Type Of Package 2	P06
Number Of Units In Package 2	12
Package 2 Height	30.31 in (77 cm)
Package 2 Width	31.50 in (80 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	229.33 lb(US) (104.02 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free
Rohs Exemption Information Yes
Pvc Free


Certifications & Standards

Reach Regulation	REACh Declaration						
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)						
China Rohs Regulation	China RoHS declaration						
Environmental Disclosure	Product Environmental Profile						
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.						
Circularity Profile	No need of specific recycling operations						
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov						

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

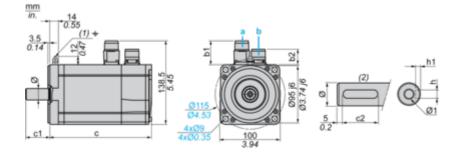

a: Power supply for servo motor brake

b: Power supply for servo motor encoder

(1) M4 screw

(2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without	c (with	c1	c2	h	h1	ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
39.5	25.5	39.5	39.5	241	272	40	30	6 N9	3.5 ^{+0.1} 0	19 k6	M6 x 16

Dimensions in in.


Straight Rotatable angled connectors connectors		c (without c (with	c1 (c2	h	h1	ø	Ø1 for			
b1	b2	b1	b2	brake)	brake)						screws
1.55	1.00	1.55	1.55	9.48	10.70	1.57	1.18	0.24 N9	0.14 ^{+0.1} 0	0.75 k6	M6 x 0.63

Performance Curves

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive



 \boldsymbol{X} Speed in rpm

Y Torque in Nm


1 Peak torque

2 Continuous torque

480 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive



X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque