Product data sheet

Specifications



Transformer, dry type, DOE 2016, 112.5kVA, 3 phase, 480V delta primary, 208Y/120V secondary, 22K, 80C rise

EX112T3HB

() Discontinued on: Nov 22, 2021

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range Of Product	Square D
Product Or Component Type	Transformer
Device Short Name	DOE 2016
Transformer Type	Energy efficient
Device Application	Low voltage electrical distribution

Complementary

Box Number	22К
Phase	3 phase
Rated Operational Power In Va	112.5 kVA
Network Frequency	60 Hz
Type Of Cooling	Natural convection
Primary Voltage	480 V delta
Number Of Tap-Offs	2 2.5 % FCAN 4 2.5 % FCBN
Secondary Voltage	208Y/120 V
Coil Material	Aluminium
Basic Imp Level (Bil)	10 kV
Temperature Rise	80 °C 220 °C insulated
Doe Efficiency	99.05 % at 35 % load factor , 167 °F (75.0 °C)
Sound Level	47 dB 3 dB NEMA ST-20
%lz	3.30 %
%lx	0.027 %
X/R Ratio	1.37
Let Through Current	9.3 kA
Transformer Losses	210.0 no load (core loss) 1460.0 load loss (coil loss)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Transformer Btu/Hr	853.8262980299199 16.6 %	
	1027.9077774999998 25 %	
	1961.98165 50 %	
	3518.7714374999996 75 %	
	5698.277139999999 100 %	
Height	49.09 in (1247 mm)	
Depth	28.46 in (723 mm)	
Width	33.66 in (855 mm)	
Net Weight	1100.00 lb(US) (498.95 kg)	
Mounting Support	Floor	
	Floor, with 7400FMB	
	Ceiling, with 7400CMB22K	
Degree Of Protection	UL type 1	-
	UL type 2, with 7400DS22K	
	UL type 3R, with 7400WS22K	
Electrical Connection	4 Hole Nema Pad primary 0.44 in (11.1 mm)	
	4 Hole Nema Pad secondary 0.44 in (11.1 mm)	
	6 Hole Nema Pad sec - XO 0.44 in (11.1 mm)	

Environment

Ambient Air Temperature For Operation	104 °F (40 °C)
Average Ambient Air Temperature For Operation	30 °C
Standards	UL 1561 CSA C22.2 No 47 NEMA ST-20

Ordering and shipping details

Category	US1PE2X16250
Discount Schedule	PE2X
Gtin	785901476566
Returnability	No
Country Of Origin	MX

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	43.50 in (110.5 cm)
Package 1 Width	30.98 in (78.7 cm)
Package 1 Length	32.99 in (83.8 cm)
Package 1 Weight	1369.24 lb(US) (621.076 kg)

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes
Pvc Free
Halogen Free Plastic Parts Product

Certifications & Standards

Eu Rohs Directive	Compliant
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
California Proposition 65	WARNING: This product can expose you to chemicals including: Phenyl Glycidyl Ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Approximate Dimensions

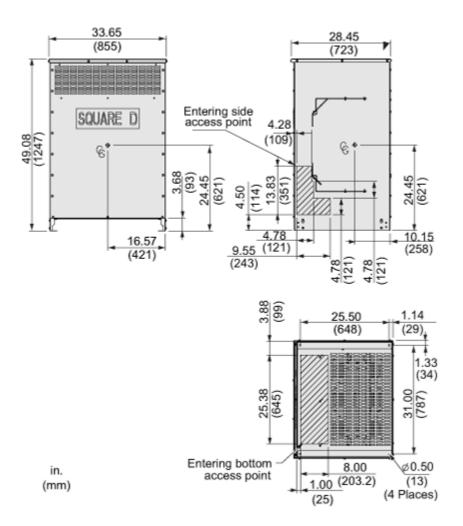

4