
Product data sheet

Specifications

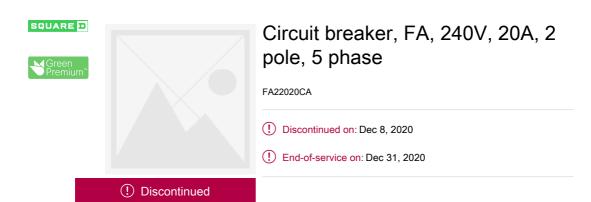

Main

Product Or Component Type	Circuit breaker
Trip Unit Technology	Thermal-magnetic

Complementary

Line Rated Current20 ANumber Of Poles2PBreaking Capacity CodeAMounting ModeI-LineMagnetic Hold Current275 AMagnetic Tripping Current600 AElectrical ConnectionLugs, load I-Line connection, lineTerminal IdentifierAL50FAPhase ConnectionCAHeight6.4 in (162.56 mm)Width3 in (76.20 mm)Depth4.13 in (104.90 mm)	
Breaking Capacity Code A Mounting Mode I-Line Magnetic Hold Current 275 A Magnetic Tripping Current 600 A Electrical Connection Lugs, load I-Line connection, line Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Mounting Mode I-Line Magnetic Hold Current 275 A Magnetic Tripping Current 600 A Electrical Connection Lugs, load I-Line connection, line Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Magnetic Hold Current 275 A Magnetic Tripping Current 600 A Electrical Connection Lugs, load I-Line connection, line Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Magnetic Tripping Current 600 A Electrical Connection Lugs, load I-Line connection, line Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Electrical Connection Lugs, load I-Line connection, line Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Terminal Identifier AL50FA Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Phase Connection CA Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Height 6.4 in (162.56 mm) Width 3 in (76.20 mm)	
Width 3 in (76.20 mm)	
Depth 4.13 in (104.90 mm)	
Circuit Breaker Application HACR rated	

Environment

Certifications	UL Listed	
	CSA	
	IEC	

Ordering and shipping details

Category	01000-FA 240V BREAKER & SWITCH
Discount Schedule	DE2
Gtin	00785901681441
Returnability	No
Country Of Origin	MX

Packing Units

Unit Type Of Package 1

PCE

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Number Of Units In Package 1

Contractual warranty

Warranty

18 months

1

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

fa

Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
	EU RoHS Declaration	
Environmental Disclosure	Product Environmental Profile	
California Proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause Birth Defects or other reproductive harm.For more information go to www.p65warnings.ca.gov	