Product data sheet

Specifications





motion servo drive, Lexium 28, three phase, 200 to 240V, 3kW

LXM28AU30M3X

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 1,295.00 USD

Main

Range Of Product	Lexium 28
Product Or Component Type	Motion servo drive
Device Short Name	LXM28A
Format Of The Drive	Compact housing
Line Current	11.8 A 155.8 % 220 V, three phase

Complementary

Phase	Three phase	
[Us] Rated Supply Voltage	200240 V - 1015 %)three phase	
Supply Voltage Limits	200255 V three phase	
Supply Frequency	50/60 Hz - 55 %	
Network Frequency	47.563 Hz	
Emc Filter	Without EMC filter	
Continuous Output Current	19.8 A 8 kHz	
Output Current 3S Peak	60 A 220 V	
Continuous Power	3000 W 220 V	
Nominal Power	3 kW 220 V 8 kHz	
Switching Frequency	8 kHz	
Overvoltage Category	III	
Maximum Leakage Current	1.6 mA	
Output Voltage	<= power supply voltage	
Electrical Isolation	Between power and control	
Type Of Cable	Shielded motor cable 32131 °F (055 °C)) copper	
Electrical Connection	Spring terminal 6 mm², AWG 10 L1-L2) Spring terminal 6 mm², AWG 10 R, S, T) Spring terminal 6 mm², AWG 10 U, V, W, PE) Spring terminal 6 mm², AWG 10 PA/+, PBe)	
Discrete Input Number	8 programmable CN1) 1 pulse train input (PTI) CN1) 2 fast capture CN1) 1 safety function STO CN9)	
Discrete Input Voltage	24 V DC logic	
Discrete Input Logic	Positive or negative CN1)	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discrete Output Number	5 logic output CN1)1224 V DC 1 pulse train output (PTO) CN1)
Discrete Output Voltage	1224 V DC
Discrete Output Logic	Positive or negative CN1)
Analogue Input Number	2
Absolute Accuracy Error	0.1 %
Analogue Input Type	V_REF voltage analog input - 1010 V 10 kOhm 14 bits T_REF voltage analog input
Control Signal Type	Servo motor encoder feedback CN2
Protection Type	Against reverse polarity inputs signal Against short-circuits outputs signal Overcurrent motor Overvoltage motor Undervoltage motor Overheating motor Overload motor Overspeed motor
Safety Function	STO (safe torque off), Integrated
Safety Level	SIL 2 IEC 61800-5-2 2007 SIL 2 IEC 61508-1 2010 PL d/category 3 ISO 13849-1 2008 SIL 2 ISO 13849-1 2009/AC SIL 2 IEC 60204-1 2006 SIL 2 IEC 60204-1 2009/A1 SIL 2 IEC 60204-1 2010/AC SIL 2 IEC 62061 2012
Communication Interface	CANopen, Integrated CANmotion, Integrated
Connector Type	RJ45 CN4)CANopen, CANmotion
Method Of Access	Slave
Transmission Rate	250 kbit/s 328.08820.21 ft (100250 m) CANopen, CANmotion 500 kbit/s 13.12328.08 ft (4100 m) CANopen, CANmotion 1 Mbit/s 13.12 ft (4 m) CANopen, CANmotion
Number Of Addresses	1127 CANopen, CANmotion
Physical Interface	RS485 Modbus Serial line slave
Status Led	1 LED (Red) charge
	1 LED (Green) RUN 1 LED (Red) error
Signalling Function	
Signalling Function Marking	1 LED (Red) error
	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE
Marking	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus
Marking Type Of Cooling	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan
Marking Type Of Cooling Operating Position	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan Vertical
Marking Type Of Cooling Operating Position Product Compatibility	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan Vertical Servo motor BCH2 7.09 in (180 mm), 2 3000 W
Marking Type Of Cooling Operating Position Product Compatibility Width	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan Vertical Servo motor BCH2 7.09 in (180 mm), 2 3000 W 4.57 in (116 mm)
Type Of Cooling Operating Position Product Compatibility Width Height	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan Vertical Servo motor BCH2 7.09 in (180 mm), 2 3000 W 4.57 in (116 mm) 9.21 in (234 mm)
Type Of Cooling Operating Position Product Compatibility Width Height Depth	1 LED (Red) error Servo status and fault codes five 7-segment display units CSA CE CULus Integrated fan Vertical Servo motor BCH2 7.09 in (180 mm), 2 3000 W 4.57 in (116 mm) 9.21 in (234 mm) 7.32 in (186 mm)

Environment

Electromagnetic Compatibility	Conducted emission - test level: level 3 category C3 conforming to IEC 61800-3	
Standards	IEC 61800-5-1	
Product Certifications	CSA cULus CE	
Ip Degree Of Protection	IP20	
Vibration Resistance	3M4 3 mm 9200 Hz)IEC 60721-3-3	
Shock Resistance	10 gn, type I IEC 60721-3-3	
Relative Humidity	595 % without condensation	
Ambient Air Temperature For Operation	32131 °F (055 °C)	
Ambient Air Temperature For Storage	-13149 °F (-2565 °C)	
Operating Altitude	<= 3280.84 ft (1000 m) without derating > 3280.846561.68 ft (> 10002000 m) 1 % per 100 m	

Ordering and shipping details

_	, ,
Category	US1PC5118262
Discount Schedule	PC51
Gtin	3606480711831
Returnability	No
Country Of Origin	CN

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7.72 in (19.6 cm)
Package 1 Width	10.16 in (25.8 cm)
Package 1 Length	13.66 in (34.7 cm)
Package 1 Weight	176.25 oz (4996.67 g)

Sustainability Green Premium"

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

⊘	Reach Free Of Svhc	
⊘	Mercury Free	
Ø	Rohs Exemption Information	Yes
⊘	Pvc Free	

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Product data sheet

LXM28AU30M3X

Dimensions Drawings

Dimensions

Dimensions of Drive

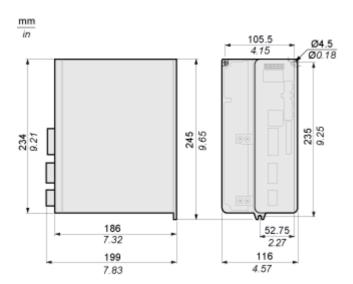

LXM28AU30M3X

Mounting and Clearance

Mounting Clearance

Mounting Distances and Air Circulation

mm

