Specification





# level control relay, Harmony Control Relays, 8A, 1CO, 380…415V AC DC

RM22LG11MT

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 72.05 USD

## Main

| Range Of Product              | Harmony Control Relays   |
|-------------------------------|--|
| Relay Type                    | Level control relay  |
| Product Or Component Type     | Level control relay  |
| Relay Name                    | RM22L  |
| Relay Monitored Parameters    | Detection by resistive probes  |
| Time Delay                    | Without  |
| Switching Capacity In Va      | 2000 VA  |
| Minimum Switching Current     | 10 mA 5 V DC   |
| Maximum Switching Current     | 8 A AC   |
| Utilisation Category          | AC-15 IEC 60947-5-1<br>DC-13 IEC 60947-5-1<br>AC-1 IEC 60947-4-1<br>DC-1 IEC 60947-4-1 |
| Contacts Type And Composition | 1 C/O  |

# Complementary

| Maximum Switching Voltage                 | 250 V AC   |
|---|--|
| [Un] Rated Nominal Voltage                | 380415 V AC/DC 50/60 Hz, non self-powered  |
| Supply Voltage Limits                     | 323456.5 V AC  |
| Output Contacts                           | 2 C/O  |
| Nominal Output Current                    | 8 A  |
| Delay At Power Up                         | 0.6 s  |
| Maximum Electrode Voltage                 | 12 V AC  |
| Maximum Electrode Current                 | 1 mA   |
| Repeat Accuracy                           | +/- 2 % time delay   |
| Measurement Error                         | < 1 % over the whole range with voltage variation 0.05 %/°C with temperature variation |
| Maximum Cable Distance<br>Between Devices | 3280.84 ft (1000 m) probe and delay  |
| Sensitivity Scale                         | 5100 kOhm St (Standard Sensitivity)  |
| Sensitivity Adjustment                    | 5100 %   |
| Maximum Supply Current For Sensors        | 1 mA   |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| Cable Capacitance             | 1 nF HS (High Sensitivity) probe cable  |
|-------------------------------|---|
|                               | 2.2 nF St (Standard Sensitivity) probe cable     4.7 nF LS (Low Sensitivity) probe cable  |
| Overvoltage Category          | III IEC 60664-1   |
| nsulation                     |   |
|                               | Between supply and measurement  |
| Connections - Terminals       | Screw terminals, 2 x 0.52 x 2.5 mm² AWG 20AWG 14) solid without cable end Screw terminals, 2 x 0.22 x 1.5 mm² AWG 24AWG 16) flexible with cable end Screw terminals, 1 x 0.51 x 3.3 mm² AWG 20AWG 12) solid without end Screw terminals, 1 x 0.51 x 3.3 mm² AWG 20AWG 14) floxible with cable and |
| Tinktonin Tonor               | Screw terminals, 1 x 0.21 x 2.5 mm² AWG 24AWG 14) flexible with cable end   |
| Fightening Torque             | 5.318.85 lbf.in (0.61 N.m) IEC 60947-1  |
| Housing Material              | Self-extinguishing plastic  |
| Mounting Support              | 35 mm DIN rail conforming to IEC 60715  |
| Mounting Position             | Any position  |
| Electrical Durability         | 100000 cycles   |
| Mechanical Durability         | 10000000 cycles   |
| Contacts Material             | Cadmium free  |
| Measurement Range             | 5100 kOhm   |
| Safety Reliability Data       | MTTFd = 125.5 years<br>B10d = 120000  |
| Width                         | 0.89 in (22.5 mm)   |
| Control Type                  | With test button  |
| Net Weight                    | 0.22 lb(US) (0.1 kg)  |
| Environment                   |   |
| Immunity To Microbreaks       | 100 ms DC<br>90 ms AC   |
| Electromagnetic Compatibility | Immunity for residential, commercial and light-industrial environments conforming to IEC 61000-6-1  |
|                               | Immunity for industrial environments conforming to IEC 61000-6-2 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3  |
|                               | Emission standard for industrial environments conforming to IEC 61000-6-4<br>Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2   |
|                               | Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2  |
|                               | Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 conforming to IEC 61000-4-3   |
|                               | Electrical fast transient/burst immunity test - test level: 4 kV level 4 (direct) conforming to IEC 61000-4-4   |
|                               | Electrical fast transient/burst immunity test - test level: 2 kV level 4 (capacitive coupling) conforming to IEC 61000-4-4  |
|                               | Surge immunity test - test level: 4 kV level 4 (common mode) conforming to IEC 61000-4-5  |
|                               | Surge immunity test - test level: 2 kV level 4 (differential mode) conforming to IEC 61000-4-5  |
|                               | Conducted and radiated emissions class B group 1 conforming to CISPR 11   |
|                               | Conducted and radiated emissions class B conforming to CISPR 22   |

|                                     | Conducted and radiated emissions class B conforming to CISPR 22 |
|-------------------------------------|---|
| Standards                           | IEC 60255-1   |
| Product Certifications              | CSA GL RCM UL EAC CE CCC  |
| Ambient Air Temperature For Storage | -40158 °F (-4070 °C)  |

| Relative Humidity       | 9397 % 77131 °F (2555 °C) IEC 60068-2-30   |  |
|-------------------------|--|--|
| Vibration Resistance    | 0.075 mm 1058.1 Hz) not in operation IEC 60068-2-6<br>1 gn 1058.1 Hz) not in operation IEC 60068-2-6 |  |
|                         | 0.035 mm 58.1150 Hz) in operation IEC 60068-2-6<br>0.5 gn 58.1150 Hz) in operation IEC 60068-2-6     |  |
| Shock Resistance        | 15 gn 11 ms) not in operation IEC 60068-2-27<br>5 gn 11 ms) in operation IEC 60068-2-27              |  |
| Ip Degree Of Protection | IP20 IEC 60529 terminals) IP40 IEC 60529 housing) IP50 IEC 60529 front panel)                        |  |
| Pollution Degree        | 3 IEC 60664-1  |  |
| Dielectric Test Voltage | 2.5 kV AC 50 Hz, 1 min IEC 60255-27  |  |

# Ordering and shipping details

| Category          | US10CP222380  |
|-------------------|---------------|
| Discount Schedule | 0CP2          |
| Gtin              | 3606480792335 |
| Returnability     | No            |
| Country Of Origin | ID            |

# **Packing Units**

| Unit Type Of Package 1       | PCE                      |
|------------------------------|--------------------------|
| Number Of Units In Package 1 | 1                        |
| Package 1 Height             | 1.02 in (2.6 cm)         |
| Package 1 Width              | 3.23 in (8.2 cm)         |
| Package 1 Length             | 3.74 in (9.5 cm)         |
| Package 1 Weight             | 3.77 oz (107.0 g)        |
| Unit Type Of Package 2       | S02                      |
| Number Of Units In Package 2 | 40                       |
| Package 2 Height             | 5.91 in (15.0 cm)        |
| Package 2 Width              | 11.81 in (30.0 cm)       |
| Package 2 Length             | 15.75 in (40.0 cm)       |
| Package 2 Weight             | 10.39 lb(US) (4.711 kg)  |
| Unit Type Of Package 3       | P06                      |
| Number Of Units In Package 3 | 640                      |
| Package 3 Height             | 31.50 in (80.0 cm)       |
| Package 3 Width              | 31.50 in (80.0 cm)       |
| Package 3 Length             | 23.62 in (60.0 cm)       |
| Package 3 Weight             | 185.76 lb(US) (84.26 kg) |

# Sustainability Green Premium

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes

#### **Certifications & Standards**


| Reach Regulation         | REACh Declaration  |
|--------------------------|--|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)   |
| China Rohs Regulation    | China RoHS declaration   |
| Environmental Disclosure | Product Environmental Profile  |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
|                          |  |
| Circularity Profile      | End of Life Information  |


Apr 26, 2024

# RM22LG11MT

# **Dimensions Drawings**

## **Dimensions**

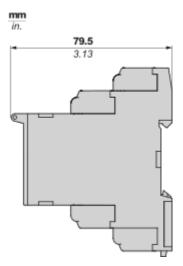




# RM22LG11MT

Mounting and Clearance

## Mounting and Clearance

### **Rail Mounting**

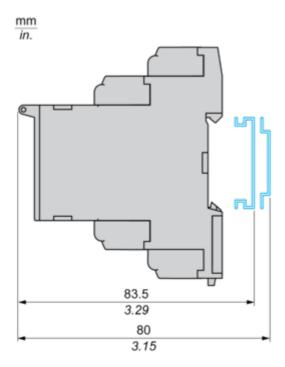


### RM22LG11MT

#### Connections and Schema

#### **Level Control Relay**

#### Wiring Diagram




A1,A2 : Supply voltage
Max : High level
Min : Low level

Apr 26, 2024

C: References or Tank earth electrode 11-14,12: 1st C/O contact of output relay

### **Control by Electrodes**

### Wiring Diagram



A1,A2 : Supply voltage Max : High level Min : Low level


C: References or Tank earth electrode 11-14,12: 1st C/O contact of output relay

### **Technical Description**

### **Function Diagrams**

#### **Control of Two Levels**

Fill/Empty function

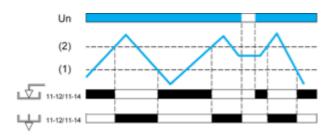

#### Legend

Un Nominal supply voltage


(1) Min. level(2) Max. level

11-12/11-14, 21-22/21-24 Output relay connections


Relay status: black color = energized.

#### Control of One Level


Empty function T on

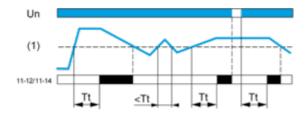

#### Empty function T off

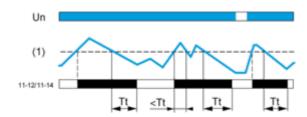


#### Fill function T on

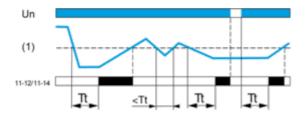

Fill function T off

## RM22LG11MT

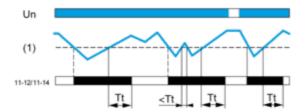

#### Legend

10

**Tt** Time delay after crossing of threshold **Un** Supply voltage

(1) Level threshold

11-12/11-14, 21-22/21-24 Output relay connections

Relay status: black color = energized.