Product data sheet

Specifications





single phase relay, Harmony Solid State Modular Relays, 6A, DIN rail mount, DC swtching, input 4 to 32V DC, output 1 to 60V DC

SSM1D26BD

Product availability: Stock - Normally stocked in distribution facility

Price*: 33.00 USD

Main

Range Of Product	Harmony Solid State Relays	
Product Or Component Type	Solid state relay up to 10 A	
Device Short Name	SSM	
Number Of Channels	1	
Number Of Phases	1 phase	
Output Switching Mode	DC switching	

Complementary

e emprementar j	
Mounting Support	Symmetrical DIN rail
Line Rated Current	6 A
Output Voltage	160 V DC
[Uc] Control Circuit Voltage	432 V DC
Tightening Torque	0.50.8 N.m for input 0.50.8 N.m for output
Connections - Terminals	Screw terminals 1 x 0.31 x 1.5 mm ² , AWG 22AWG 16) input Screw terminals 1 x 0.31 x 2.5 mm ² , AWG 22AWG 14) output
Maximum Capacitance	10 pF for input/output
Insulation Resistance	1000 MOhm at 500 V DC
Local Signalling	for input status LED (green)
Minimum Switching Voltage	4 V DC turn-on
Maximum Switching Voltage	1 V DC turn-off
Input Current	811 mA
Solid State Output Type	Mosfet output DC switching
Load Current	0.00256 A
Transient Overvoltage	60 V
Surge Current	60 A 10 ms
Maximum Voltage Drop	<0.6 V on-state
Resistance	0.1 Ohm on-state
Maximum Leakage Current	0.1 mA off-state

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Response Time	0.6 ms (turn-on) 0.3 ms (turn-off)
Overvoltage Category	III
Width	0.43 in (11 mm)
Height	3.56 in (90.3 mm)
Depth	3.30 in (83.7 mm)
Net Weight	0.11 lb(US) (0.05 kg)

Environment

Flame Retardance	V0 conforming to UL 94
Dielectric Strength	4 kV DC for input/output 4 kV DC for input or output to case
Pollution Degree	2
Standards	IEC 61000 IEC 62314 IEC 60950-1
Product Certifications	UL CSA
Marking	CE
Ip Degree Of Protection	IP20
Ambient Air Temperature For Operation	-22176 °F (-3080 °C)
Ambient Air Temperature For Storage	-22212 °F (-30100 °C)

Ordering and shipping details

Category	US10CP222375	
Discount Schedule	0CP2	
Gtin	3606480579349	
Returnability	Yes	
Country Of Origin	MX	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	0.79 in (2 cm)
Package 1 Width	3.54 in (9 cm)
Package 1 Length	3.54 in (9 cm)
Package 1 Weight	2.15 oz (61 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	96
Package 2 Height	5.91 in (15 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	13.80 lb(US) (6.26 kg)

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information
Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Product data sheet


Dimensions Drawings

Dimensions

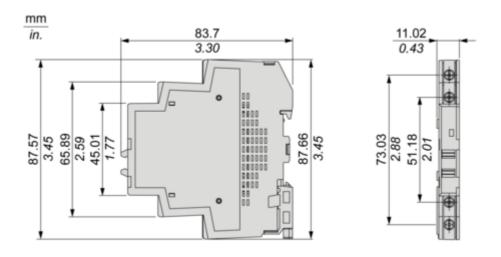

Performance Curves

Derating Curves



A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 11 mm