Disclaimer. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



fan module - for TSXRKY racks - 24 V DC

TSXFAND2P

! Discontinued on: May 4, 2023

① Discontinued

Main

Range Of Product	Modicon Premium Automation platform
Product Or Component Type	Fan module
Accessory / Separate Part Type	Fan kit
Accessory / Separate Part Designation	Fan kit

Complementary

Product Compatibility	TSXRKY racks
[Us] Rated Supply Voltage	24 V
Supply Circuit Type	DC
Net Weight	0.5 kg

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	9.0 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	578.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	12
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	7.336 kg

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Well-being performance



Mercury Free

Eu Rohs Directive	Not applicable, out of EU RoHS legal scope
China Rohs Regulation	China RoHS declaration


Product datasheet

TSXFAND2P

Dimensions Drawings

Ventilation Module


Dimensions

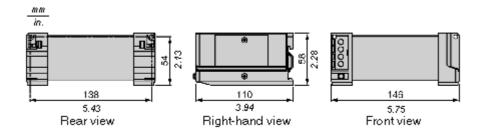

Connections and Schema

Wiring Diagrams


Connection of the Ventilation Module Power Supply

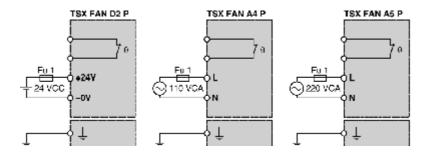


NOTE: When using several ventilation modules of the same type, use a common power supply for all the ventilation modules.

Connection of the Temperature Probe Power Supply

The Temperature probe may be supplied either by a direct current or alternating current and be connected to a LED indicator, a PLC input, etc. .

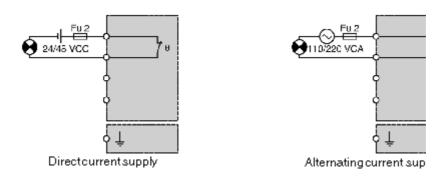

NOTE: When using several ventilation modules, the probe contacts shall be serialized.

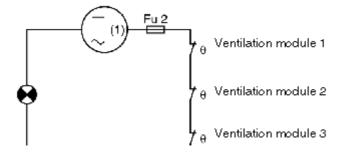

(1) 24/28 Vdc or 110/220 Vac