


# Product data sheet

Specifications

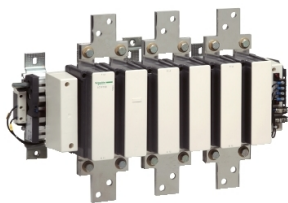

contactor, TeSys F, 3P(3NO), AC-3,  
<=440V 780A, coil 230V AC

LC1F780P7

## Main

Range	TeSys
Range Of Product	TeSys F
Product Or Component Type	Contactors
Device Short Name	LC1F
Contactors Application	Resistive load Motor control
Utilisation Category	AC-1 AC-4 AC-3
Poles Description	3P
[Ue] Rated Operational Voltage	<= 1000 V AC 50/60 Hz <= 460 V DC
[Uc] Control Circuit Voltage	230 V AC 40...400 Hz
[Ie] Rated Operational Current	1600 A (at <40 °C) at <= 440 V AC AC-1 780 A (at <55 °C) at <= 440 V AC AC-3

## Complementary

[Uimp] Rated Impulse Withstand Voltage	8 kV
[Ith] Conventional Free Air Thermal Current	1600 A (at 40 °C)
Rated Breaking Capacity	6240 A conforming to IEC 60947-4-1
[Icw] Rated Short-Time Withstand Current	3000 A 40 °C - 3 min 6250 A 40 °C - 10 s 5600 A 40 °C - 30 s 4600 A 40 °C - 1 min 2200 A 40 °C - 10 min
Associated Fuse Rating	1600 A gG at <= 440 V 800 A aM at <= 440 V
Average Impedance	0.1 mOhm - Ith 1600 A 50 Hz
[Ui] Rated Insulation Voltage	1000 V conforming to IEC 60947-4-1 1500 V conforming to VDE 0110 group C
Power Dissipation Per Pole	250 W AC-1 60 W AC-3
Overvoltage Category	III
Power Pole Contact Composition	3 NO

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Motor Power Kw	450 kW at 1000 V AC 50/60 Hz (AC-3) 400 kW at 380...400 V AC 50/60 Hz (AC-3) 425 kW at 415 V AC 50/60 Hz (AC-3) 425 kW at 440 V AC 50/60 Hz (AC-3) 450 kW at 500 V AC 50/60 Hz (AC-3) 475 kW at 660...690 V AC 50/60 Hz (AC-3) 220 kW at 220...230 V AC 50/60 Hz (AC-3) 110 kW at 400 V AC 50/60 Hz (AC-4)
Control Circuit Voltage Limits	Operational: 0.85...1.1 Uc 40...400 Hz (at 55 °C) Drop-out: 0.2...0.4 Uc 40...400 Hz (at 55 °C)
Mechanical Durability	5 Mcycles
Inrush Power In Va	2100 VA, 40...400 Hz cos phi 0.9 (at 20 °C)
Hold-In Power Consumption In Va	50 VA, 40...400 Hz cos phi 0.9 (at 20 °C)
Maximum Operating Rate	600 cyc/h 55 °C
Operating Time	40...80 ms closing 130...230 ms opening
Connections - Terminals	Control circuit: screw clamp terminals 1 cable(s) 1...4 mm²flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm²flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm²flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm²flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm²solid without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm²solid without cable end Power circuit: bar 2 cable(s) - busbar cross section: 100 x 5 mm Power circuit: bolted connection
Tightening Torque	Control circuit: 1.2 N.m Power circuit: 58 N.m
Mounting Support	Plate
Heat Dissipation	44 W
Motor Power Range	250...500 kW at 380...440 V 3 phases 110...220 kW at 200...240 V 3 phases 250...500 kW at 480...500 V 3 phases
Motor Starter Type	Direct on-line contactor
Contactor Coil Voltage	230 V AC standard
Standards	JIS C8201-4-1 EN 60947-1 IEC 60947-1 IEC 60947-4-1 EN 60947-4-1
Product Certifications	CSA RMRoS BV UL DNV LROS (Lloyds register of shipping) CB RINA ABS
Compatibility Code	LC1F
Control Circuit Type	AC at 40...400 Hz

## Environment

Ip Degree Of Protection	IP20 front face with shrouds conforming to IEC 60529 IP20 front face with shrouds conforming to VDE 0106
Protective Treatment	TH
Ambient Air Temperature For Operation	-5...55 °C
Ambient Air Temperature For Storage	-60...80 °C

Permissible Ambient Air Temperature Around The Device	-40...70 °C
Height	434 mm
Width	702 mm
Depth	255 mm
Operating Altitude	3000 m without derating
Net Weight	39.5 kg

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	42.0 cm
Package 1 Width	44.0 cm
Package 1 Length	97.0 cm
Package 1 Weight	43.0 kg
Unit Type Of Package 2	PAL
Number Of Units In Package 2	2
Package 2 Height	85.0 cm
Package 2 Width	120.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	113.0 kg

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency   RoHS/REACH

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information   [Yes](#)


## Certifications & Standards

Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	<a href="#">End of Life Information</a>

Dimensions Drawings

Dimensions and Drawings

LC1 F780

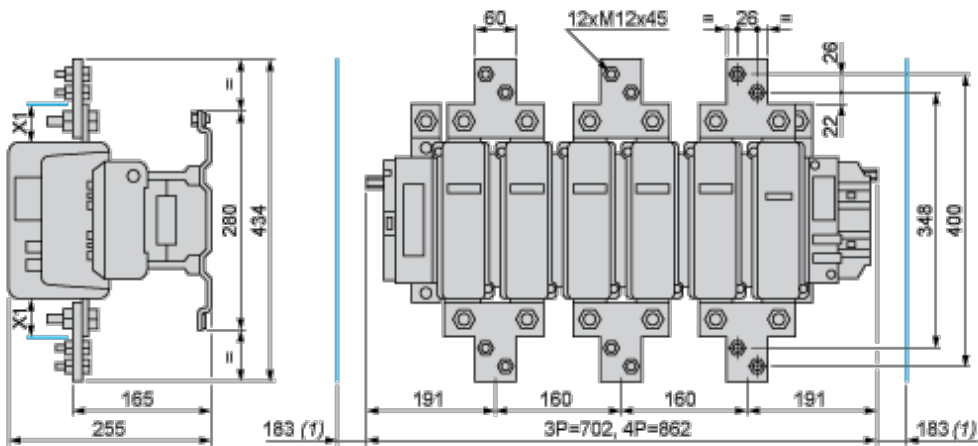


(1) Minimum distance required for coil removal.

**NOTE:** X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.


Voltage	200...500 V	690...1000 V
X1 (mm)	30	35

Fixing centers of LC1 F780

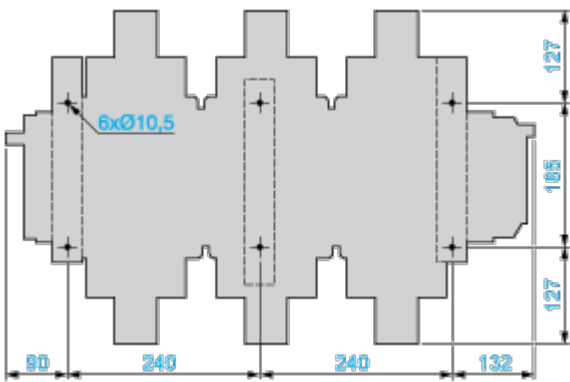

Connections and Schema

Connections and Schema



LC1 F780  or 

Motor Starter BOM  
Motor Starter BOM