

Connector module, Lexium 32i, ethernet m12;4 inputs/2 outputs m8 sink

VW3M9217

Main

Range Of Product	Lexium 32i
Product Or Component Type	Connector module
Accessory / Separate Part Category	Connection accessories
Electrical Connection	Industrial connector

Complementary

Product Compatibility	Control unit LXM32i EtherCAT Control unit LXM32i Profinet
Accessory / Separate Part Destination	Motor BMI with control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication Interface	EtherCAT Profinet
Input/Output Type	2 discrete outputs 4 discrete inputs
Discrete Input Logic	Sink
Net Weight	0.22 kg

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.2 cm
Package 1 Width	11.5 cm
Package 1 Length	16.6 cm
Package 1 Weight	220 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	1
Package 2 Height	8.2 cm
Package 2 Width	11.5 cm
Package 2 Length	17 cm
Package 2 Weight	220 g
Unit Type Of Package 3	S04
Number Of Units In Package 3	30
Package 3 Height	30 cm

Package 3 Width	40 cm
Package 3 Length	60 cm
Package 3 Weight	7 611 ka

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Well-being performance




Mercury Free

Reach Regulation	REACh Declaration
Eu Rohs Directive	Not applicable, out of EU RoHS legal scope
China Rohs Regulation	China RoHS declaration
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Connections and Schema

Connections and Schema

Connection of I/O Module for CANopen with Industrial Connectors

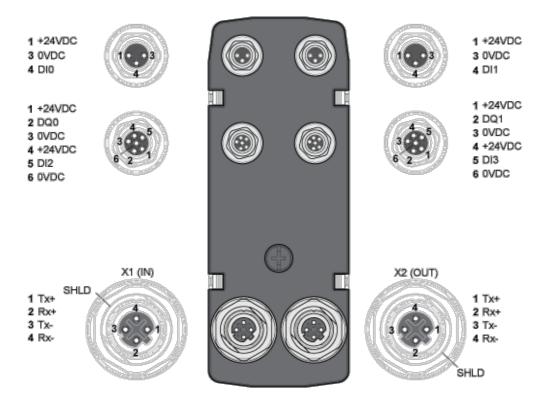

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
DQ0	Digital output 0
DQ1	Digital output 1
SHLD	Shield (grounded internally)
Tx+	Ethernet transmit signal +
Tx-	Ethernet transmit signal -
Rx+	Ethernet receive signal +
Rx-	Ethernet receive signal -

Product data sheet

VW3M9217

Signal	Meaning
NC	Not connected