

# Product data sheet

Specifications



## Harmony XVB, Base unit for modular tower lights, plastic, black, Ø70, bottom or side cable entry

XVBC07

### Main

Range of product	Harmony XVB Universal
Product or component type	Base unit
Component name	XVBC
Material	Glass reinforced polyamide: base unit

### Complementary

Fixing mode	Direct or tube fixing
Mounting diameter	70 mm
Product destination	Banks without flash discharge tube unit
Electrical connection	1 connector for standard input
Cable entry	Bottom or side entry
Assembly style	Customer assembly, up to 5 units
Terminals description ISO n°1	(COM-2)PW (COM-3)PW (COM-1)PW (GND)GROUND (COM-4)PW (COM-5)PW
Net weight	0.16 kg

### Environment

Product certifications	CCC EAC CSA C22-2 No 14 UL 508
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
NEMA degree of protection	Type 4X conforming to UL (indoor)

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	170.0 g

Package 1 Height	10 cm
Package 1 width	12 cm
Package 1 Length	10 cm
Unit Type of Package 2	P06
Number of Units in Package 2	144
Package 2 Weight	36.5 kg
Package 2 Height	45 cm
Package 2 width	60 cm
Package 2 Length	80 cm
Unit Type of Package 3	S03
Number of Units in Package 3	36
Package 3 Weight	7.0 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>


## Contractual warranty

Warranty	18 months
----------	-----------

**Indicator Bank with “Flash” Discharge Tube Unit**

**Dimensions**

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

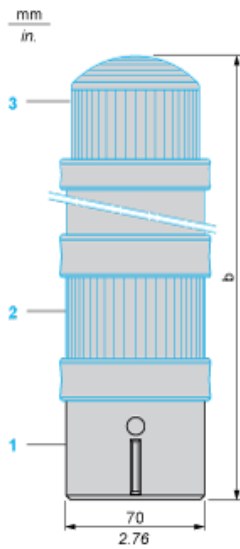


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) “Flash” unit XVBC•••, to be ordered separately

Number of illuminated or audible signalling units other than “flash” tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06

**Base Unit for Indicator Banks**

---

**Panel Cut-out for Direct Fixing**



**Illuminated Beacon**

---

**Wiring Diagram**

