Specifications





passive connection sub-base ABE7 - 16 inputs or outputs - Led

ABE7H16R21

Price: 3,668.80 ZAR

Main

Range Of Product	Modicon ABE7
Product Or Component Type	Passive discrete I/O sub-base
Sub-Base Type	I/O sub-base
[Us] Rated Supply Voltage	1930 V conforming to IEC 61131-2
Number Of Channels	16
Number Of Terminal Per Channel	2
Connections - Terminals	Screw type terminals, 1 x 0.091 x 1.5 mm ² (AWG 28AWG 16) flexible with cable end
	Screw type terminals, 1 x 0.141 x 2.5 mm ² (AWG 26AWG 12) solid
	Screw type terminals, 1 x 0.141 x 2.5 mm ² (AWG 26AWG 14) flexible without cable end
	Screw type terminals, 2 x 0.092 x 0.75 mm ² (AWG 28AWG 20) flexible with cable end
	Screw type terminals, 2 x 0.22 x 2.5 mm ² (AWG 24AWG 14) solid

Complementary

DC
2
1 LED per channel (green) channel status 1 LED (green) power ON
0 V or 24 V
2 A internal fuse, 5 x 20 mm, fast blow (PLC end)
HE-10
20 pins
By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)
1.8 A
0.5 A
1.8 A
0.3 V
2000 V
II conforming to IEC 60664-1
0.6 N.m with flat Ø 3.5 mm screwdriver
125 mm
0.3 kg

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Environment

Product Certifications	DNV
	CSA
	UL
	GL
	EAC
Ip Degree Of Protection	IP2X conforming to IEC 60529
Resistance To Incandescent Wire	750 °C conforming to IEC 60695-2-11
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Vibration Resistance	2 gn (f= 10150 Hz) conforming to IEC 60068-2-6
Resistance To Electrostatic	4 kV (contact) level 3 conforming to IEC 61000-4-2
Discharge	8 kV (air) level 3 conforming to IEC 61000-4-2
Resistance To Radiated Fields	10 V/m (260000001000000000 Hz) conforming to IEC 61000-4-3 level 3
Resistance To Fast Transients	2 kV level 3 conforming to IEC 61000-4-4
Ambient Air Temperature For Operation	-560 °C conforming to IEC 61131-2
Ambient Air Temperature For Storage	-4080 °C conforming to IEC 61131-2
Pollution Degree	2 conforming to IEC 60664-1

Packing Units

Number Of Units In Package 11Package 1 Height7.000 cmPackage 1 Width8.200 cmPackage 1 Length13.700 cmPackage 1 Weight302.000 gUnit Type Of Package 2S03Number Of Units In Package 230Package 2 Height30.000 cmPackage 2 Width30.000 cmPackage 2 Length40.000 cm	•	
Package 1 Height7.000 cmPackage 1 Width8.200 cmPackage 1 Length13.700 cmPackage 1 Weight302.000 gUnit Type Of Package 2S03Number Of Units In Package 230Package 2 Height30.000 cmPackage 2 Width30.000 cmPackage 2 Length40.000 cm	Unit Type Of Package 1	PCE
Package 1 Width8.200 cmPackage 1 Length13.700 cmPackage 1 Weight302.000 gUnit Type Of Package 2S03Number Of Units In Package 230Package 2 Height30.000 cmPackage 2 Width30.000 cmPackage 2 Length40.000 cm	Number Of Units In Package 1	1
Package 1 Length13.700 cmPackage 1 Weight302.000 gUnit Type Of Package 2S03Number Of Units In Package 230Package 2 Height30.000 cmPackage 2 Width30.000 cmPackage 2 Length40.000 cm	Package 1 Height	7.000 cm
Package 1 Weight302.000 gUnit Type Of Package 2S03Number Of Units In Package 230Package 2 Height30.000 cmPackage 2 Width30.000 cmPackage 2 Length40.000 cm	Package 1 Width	8.200 cm
Unit Type Of Package 2 S03 Number Of Units In Package 2 30 Package 2 Height 30.000 cm Package 2 Width 30.000 cm Package 2 Length 40.000 cm	Package 1 Length	13.700 cm
Number Of Units In Package 2 30 Package 2 Height 30.000 cm Package 2 Width 30.000 cm Package 2 Length 40.000 cm	Package 1 Weight	302.000 g
Package 2 Height 30.000 cm Package 2 Width 30.000 cm Package 2 Length 40.000 cm	Unit Type Of Package 2	S03
Package 2 Width 30.000 cm Package 2 Length 40.000 cm	Number Of Units In Package 2	30
Package 2 Length 40.000 cm	Package 2 Height	30.000 cm
	Package 2 Width	30.000 cm
Package 2 Weight 9.455 kg	Package 2 Length	40.000 cm
	Package 2 Weight	9.455 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free


Rohs Exemption Information
Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings


Dimensions

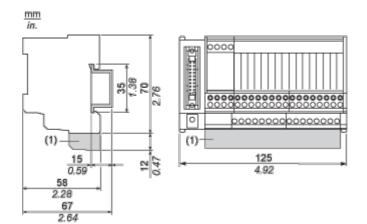

(1) ABE7BV20 / ABE7BV20E


Mounting and Clearance

Mounting

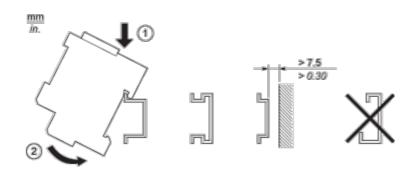



Connections and Schema

HE10 16 Channels



Wiring Diagrams






(1) Inductive load

ABE7H16R21

Performance Curves

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

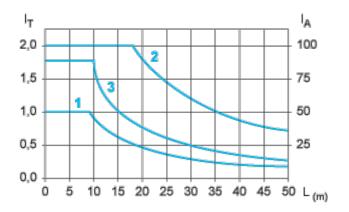

- L Cable length
- I_T Total current per sub base (A)
- I_A Average current per channel (mA)
- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm² (AWG 28).
- (2) TSXCDP••3 cables with c.s.a. 0.34 mm^2 (AWG 22).
- (3) Cables with c.s.a. 0.13 mm² (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.