

# Product datasheet

Specifications



Harmony XB4. Selector switch head. metal. black. Ø22. 2 positions. spring return from right to left

ZB4BD4

Price: 393.79 ZAR

## Main

|                               |                             |
|-------------------------------|-----------------------------|
| Range Of Product              | Harmony XB4                 |
| Product Or Component Type     | Head for selector switch    |
| Device Short Name             | ZB4                         |
| Bezel Material                | Chromium plated metal       |
| Mounting Diameter             | 22.5 mm                     |
| Head Type                     | Standard                    |
| Sale Per Indivisible Quantity | 1                           |
| Shape Of Signaling Unit Head  | Round                       |
| Type Of Operator              | Right to left spring return |
| Operator Profile              | Black standard handle       |
| Operator Position Information | 2 positions 90°             |
| Cap/Operator Or Lens Colour   | Black                       |

## Complementary

|                                    |   |
|------------------------------------|---|
| Cad Overall Width                  | 29 mm   |
| Cad Overall Height                 | 29 mm   |
| Cad Overall Depth                  | 44 mm   |
| Net Weight                         | 0.045 kg  |
| Resistance To High Pressure Washer | 7000000 Pa at 55 °C, distance : 0.1 m   |
| Mechanical Durability              | 1000000 cycles  |
| Electrical Composition Code        | C3 for <6 contacts using single blocks in front mounting<br>C4 for <6 contacts using single and double blocks in front mounting<br>C5 for <5 contacts using single blocks in front mounting<br>C6 for <5 contacts using single and double blocks in front mounting<br>C7 for <4 contacts using single blocks in front mounting<br>C8 for <4 contacts using single and double blocks in front mounting<br>C11 for <3 contacts using single blocks in front mounting<br>C15 for <1 contacts using single blocks in front mounting |

|                     |               |
|---------------------|---------------|
| Device Presentation | Basic element |
|---------------------|---------------|

## Environment

|                                       |             |
|---------------------------------------|-------------|
| Protective Treatment                  | TH          |
| Ambient Air Temperature For Storage   | -40...70 °C |
| Ambient Air Temperature For Operation | -40...70 °C |

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                           |  |
|---------------------------|--|
| Overvoltage Category      | Class I conforming to IEC 60536  |
| Ip Degree Of Protection   | IP67 conforming to IEC 60529<br>IP69<br>IP69K  |
| Nema Degree Of Protection | NEMA 13<br>NEMA 4X   |
| Ik Degree Of Protection   | IK06 conforming to IEC 50102   |
| Standards                 | IEC 60947-5-4<br>IEC 60947-5-5<br>IEC 60947-1<br>UL 508<br>CSA C22.2 No 14<br>IEC 60947-5-1<br>JIS C8201-5-1<br>JIS C8201-1  |
| Product Certifications    | CSA<br>BV<br>UL listed<br>GL<br>DNV<br>LROS (Lloyds register of shipping)  |
| Vibration Resistance      | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6   |
| Shock Resistance          | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type Of Package 1       | PCE       |
| Number Of Units In Package 1 | 1         |
| Package 1 Height             | 3.6 cm    |
| Package 1 Width              | 5.4 cm    |
| Package 1 Length             | 5.5 cm    |
| Package 1 Weight             | 51 g      |
| Unit Type Of Package 2       | S03       |
| Number Of Units In Package 2 | 200       |
| Package 2 Height             | 30 cm     |
| Package 2 Width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Package 2 Weight             | 10.565 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance

|   |                            |     |
|---|----------------------------|-----|
| ✓ | Reach Free Of Svhc         |     |
| ✓ | Toxic Heavy Metal Free     |     |
| ✓ | Mercury Free               |     |
| ✓ | Rohs Exemption Information | Yes |


Certifications & Standards

|                          |   |
|--------------------------|---|
| Reach Regulation         | <a href="#">REACH Declaration</a>   |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile      | <a href="#">End of Life Information</a>   |

Dimensions Drawings

Dimensions

---

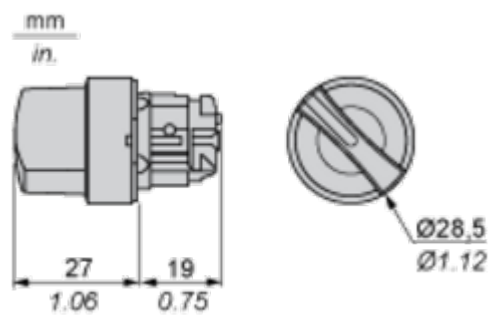

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board   | Connection by Faston Connectors |
|---|---------------------------------|
|   |                                 |
| <p>(1) Diameter on finished panel or support</p> <p>(2) 40 mm min. / 1.57 in. min.</p> <p>(3) 30 mm min. / 1.18 in. min.</p> <p>(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm <math>^{+0.4}_0</math> / 0.88 in. <math>^{+0.016}_0</math>)</p> <p>(5) 45 mm min. / 1.78 in. min.</p> <p>(6) 32 mm min. / 1.26 in. min.</p> |                                 |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer’s Side)




A: 30 mm min. / 1.18 in. min.


B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

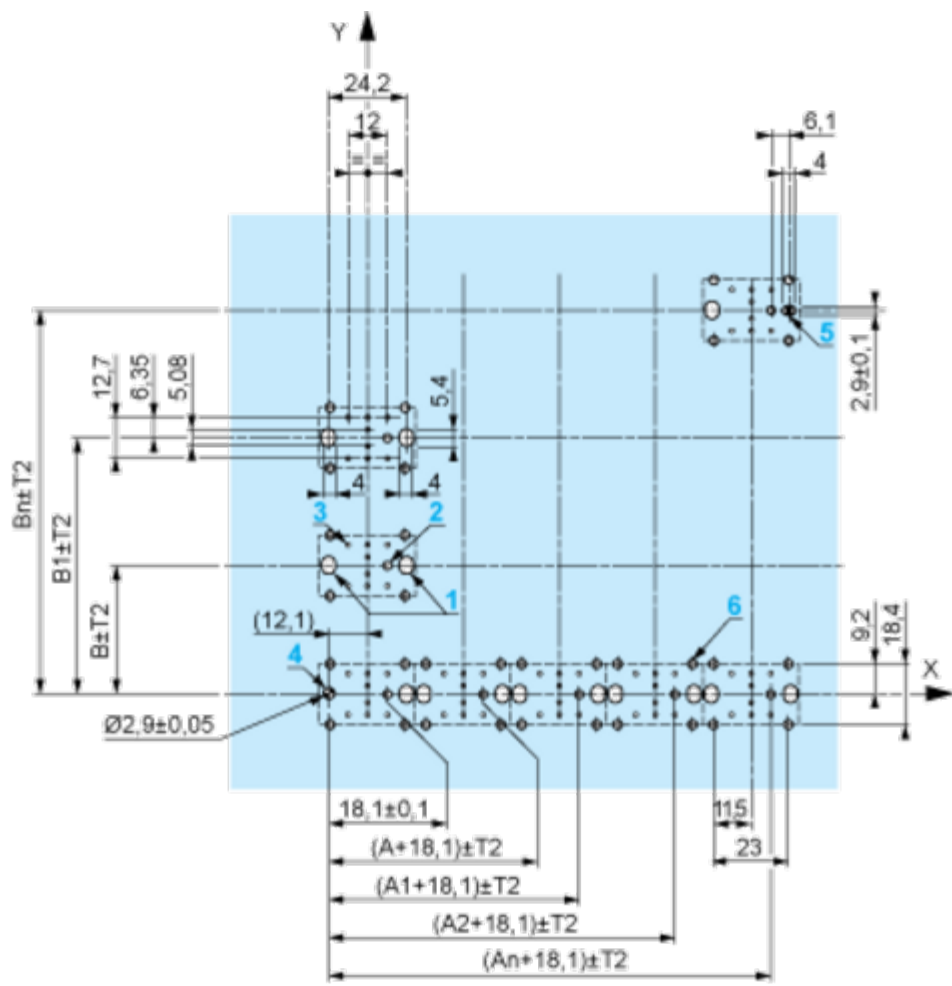

A: 30 mm min.  
B: 40 mm min.  
Dimensions in in.

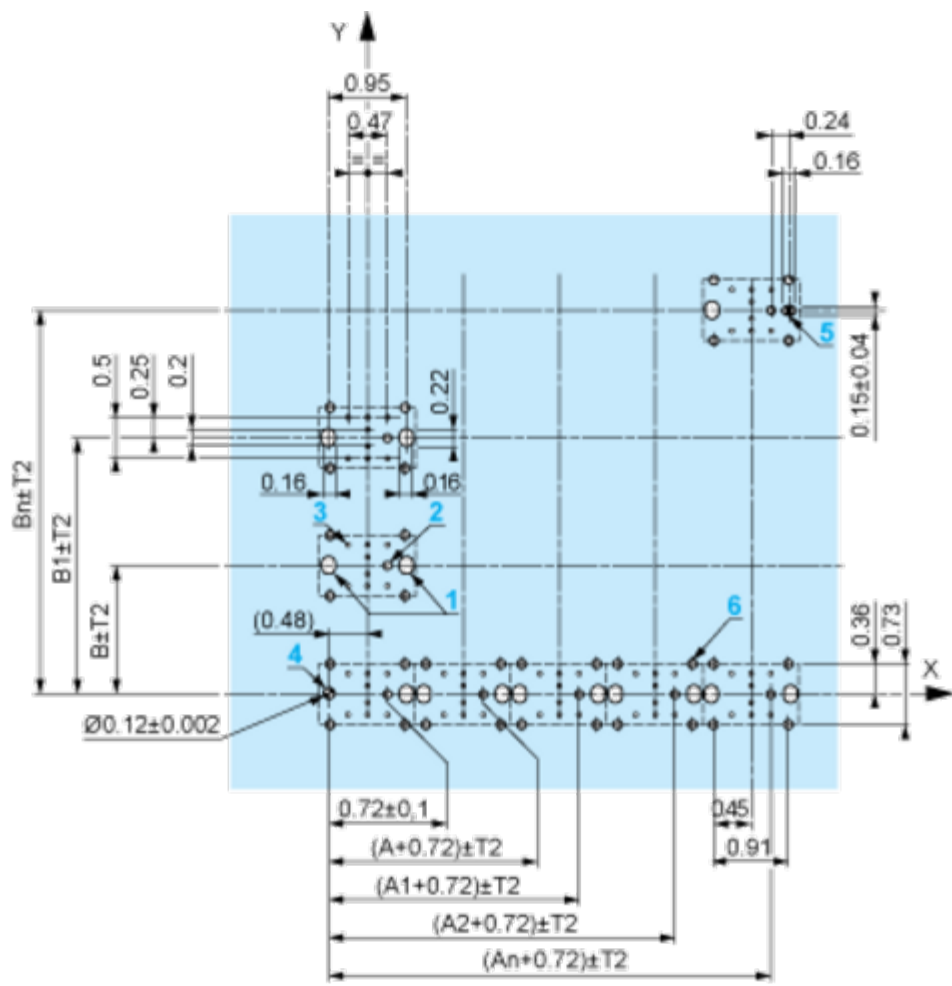

A: 1.18 in. min.

B: 1.57 in. min.


### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in:  $T1 + T2 = 0.3 \text{ mm max.}$

### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm 0.1$  / 0.88 in.  $\pm 0.004$
- Orientation of body/fixing collar ZB4 BZ009:  $\pm 2^\circ 30'$  (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

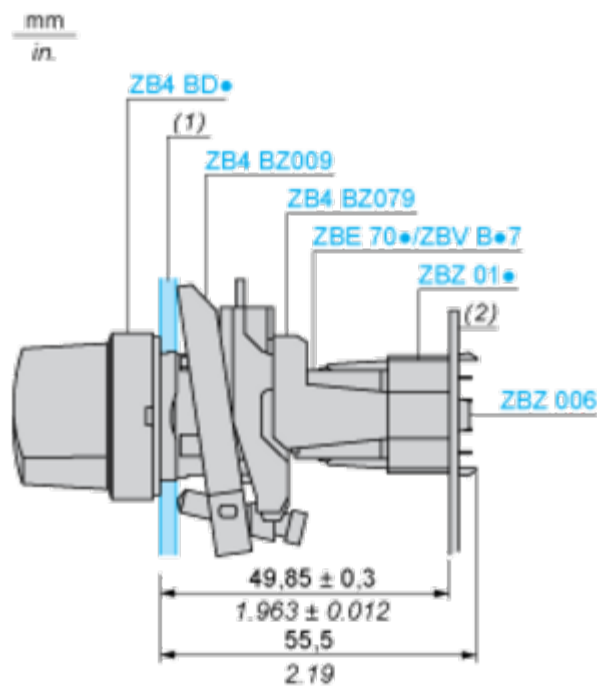

- (1) Panel  
(2) Printed circuit board

**Mounting of Adapter (Socket) ZBZ 01•**

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  for centring adapter ZBZ 01•
- 3  $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$  holes
- 4 1 hole  $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$ , for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes  $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$  for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

Technical Description

Electrical Composition Corresponding to Code C3

---




Electrical Composition Corresponding to Code C4

---



Electrical Composition Corresponding to Code C5

---

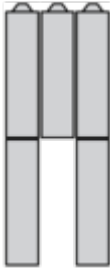


Electrical Composition Corresponding to Code C6

---



Electrical Composition Corresponding to Code C7

---

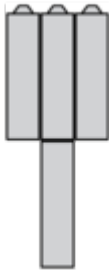

Electrical Composition Corresponding to Code C8

---




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Electrical Composition Corresponding to Code C15

---


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

---

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
|          |          | Bottom |        |        |        |
|          | Location |        | Left   | Centre | Right  |
|          | State    |        | 0      | 0      | 0      |
|          |          |        |        |        |        |
| Contacts | N/O      |        | open   | open   | open   |
|          | N/C      |        | closed | closed | closed |

Position 45°



|          |          |        |        |        |        |
|----------|----------|--------|--------|--------|--------|
| Push     | Position | Top    |        |        |        |
|          |          | Bottom |        |        |        |
|          | Location |        | Left   | Centre | Right  |
|          | State    |        | 1      | 1      | 1      |
|          |          |        |        |        |        |
| Contacts | N/O      |        | closed | closed | closed |
|          | N/C      |        | open   | open   | open   |