Product datasheet

Specifications



() Discontinued

enclosed variable speed drive ATV71 Plus - 132 kW - 690V - IP54 SA

ATV71EXS5C13Y

() Discontinued on: 12 Mar 2021

(!) To be end-of-service on: 31 Dec 2029

Main

Range Of Product	Altivar 71 Plus			
Product Or Component Type	Variable speed drive			
Device Short Name	ATV71 Plus			
Product Destination	Asynchronous motors Synchronous motors			
Product Specific Application	Complex, high-power machines			
Assembly Style	In floor-standing enclosure with separate air flows			
Product Composition	A switch and fast-acting semi-conductor fuses A line choke in an additional enclosure An IP65 remote mounting kit for graphic display terminal ATV71HC13Y drive on heatsink Terminals/bars for motor connection A wired ready-assembled Sarel Spacial 6000 enclosure A plinth			
Emc Filter	Integrated			
Network Number Of Phases	3 phases			
Rated Supply Voltage	690 V +/- 10 %			
Supply Voltage Limits	621759 V			
Supply Frequency	5060 Hz +/- 5 %			
Network Frequency	47.563 Hz			
Motor Power Kw	132 kW at 690 V			
Line Current	137 A for 690 V / 132 kW			

Complementary

Apparent Power	164 kVA for 690 V / 132 kW		
Prospective Line Isc	50 kA with external fuses		
Continuous Output Current	150 A at 2.5 kHz, 690 V / 132 kW		
Maximum Transient Current	225 A for 60 s / 132 kW		
Speed Drive Output Frequency	0.1500 Hz		
Nominal Switching Frequency	2.5 kHz		
Switching Frequency	2.54.9 kHz with derating factor 24.9 kHz adjustable		

Speed Range	1100 for asynchronous motor in open-loop mode, without speed feedback 11000 for asynchronous motor in closed-loop mode with encoder feedback 150 for synchronous motor in open-loop mode, without speed feedback				
Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn				
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback				
Transient Overtorque	170 % of nominal motor torque for 60 s 220 % of nominal motor torque for 2 s				
Braking Torque	<= 150 % with braking or hoist resistor 30 % without braking resistor				
Asynchronous Motor Control Profile	Voltage/frequency ratio, 2 points Flux vector control without sensor, 2 points Flux vector control with sensor, standard Voltage/frequency ratio, 5 points Flux vector control without sensor, ENA (energy Adaptation) system Flux vector control without sensor, standard Voltage/frequency ratio - Energy Saving, quadratic U/f				
Synchronous Motor Control Profile	Vector control with sensor, standard Vector control without sensor, standard				
Regulation Loop	Adjustable PI regulator				
Motor Slip Compensation	Not available in voltage/frequency ratio (2 or 5 points) Automatic whatever the load Suppressable Adjustable				
Overvoltage Category	Class 3 conforming to EN 50178				
Local Signalling	LCD display unit for operation function, status and configuration - mounted in the front door				
Output Voltage	<= rated supply voltage				
Isolation	Electrical between power and control				
Type Of Cable For External Connection	IEC cable at 40 °C, copper 70 °C / PVC				
Electrical Connection	Terminal M10 - 2 x 150 mm² (U/T1, V/T2, W/T3) bottom entry Terminal - 2.5 mm² / AWG 14 (AI1-/AI1+, AI2, AO1, R1A, R1B, R1C, R2A, R2B, LI1LI6, PWR) bottom entry Terminal M8 - 2 x 120 mm² (L1/R, L2/S, L3/T) bottom entry				
Motor Recommanded Cable Cross Section	3 x 70 mm ²				
Short-Circuit Protection	200 A fuse protection type gl - power supply upstream				
Supply	External supply: 24 V DC (1930 V), <1 A Internal supply for reference potentiometer: 10 V DC (1011 V), <10 mA Internal supply: 24 V DC (2127 V), <100 mA				
Analogue Input Number	2				
Analogue Input Type	Al1-/Al1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.52.6 ms, resolution: 11 bits + sign Al2 software-configurable voltage: 010 V DC, impedance: 30000 Ohm, sampling time: 1.52.5 ms, resolution: 11 bits Al2 software-configurable current: 020 mA, 24 V max, impedance: 250 Ohm, sampling time: 1.52.5 ms, resolution: 11 bits				
Analogue Output Number	1				
Analogue Output Type	Software-configurable voltage: (AO1) 010 V DC - 500 Ohm - sampling time: 1.5 2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 020 mA/420 mA - 470 Ohm - sampling time: 1.52.5 ms - resolution: 10 bits				
Discrete Output Number	2				
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.57.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.57.5 ms - 100000 cycles				

Minimum Switching Current	3 mA at 24 V DC (configurable relay logic)			
Maximum Switching Current	5 A at 250 V AC on resistive load - cos phi = 1 (R1, R2) 5 A at 30 V DC on resistive load - L/R = 0 ms (R1, R2) 2 A at 250 V AC on inductive load - cos phi = 0.4 (R1, R2)			
	2 A at 30 V DC on inductive load - L/R = 7 ms (R1, R2)			
Discrete Input Number	7			
Discrete Input Type	Programmable (LI1LI5) at 24 V DC <= 30 V level 1 PLC 3.5 kOhm (duration=1.5 2.5 ms) Switch-configurable (LI6) at 24 V DC <= 30 V level 1 PLC 1.5 kOhm (duration=1.5 2.5 ms) Safety input (PWR) at 24 V DC <= 30 V 1.5 kOhm			
Discrete Input Logic	Positive logic (source) (LI1LI6), 05 V (state 0), 1130 V (state 1) Negative logic (sink) (LI1LI6), 1630 V (state 0), 010 V (state 1) Positive logic (source) (PWR), 02 V (state 0), 1730 V (state 1)			
Acceleration And Deceleration Ramps	Linear adjustable separately from 0.01 to 9000 s S, U or customized			
Braking To Standstill	By DC injection			
Protection Type	Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Overcurrent between output phases and earth: drive Overvoltages on the DC bus: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor			
Dielectric Strength	3110 V DC between earth and power terminals 5345 V DC between control and power terminals			
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth			
Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz			
Communication Port Protocol	Modbus CANopen			
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen			
Physical Interface	2-wire RS 485 for Modbus			
Transmission Frame	RTU for Modbus			
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen			
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal			
Type Of Polarization	No impedance for Modbus			
Number Of Addresses	1127 for CANopen 1247 for Modbus			

Option Card	Communication card for CC-Link
•	Communication card for DeviceNet
	Communication card for EtherNet/IP
	Communication card for Fipio
	Communication card for Interbus-S
	Communication card for Modbus Plus
	Communication card for Modbus/Uni-Telway
	Communication card for Profibus DP
	Communication card for Profibus DP V1
	Communication card for Modbus TCP/IP
	Controller inside programmable card
	Basic I/O extension card
	Extended I/O extension card
	Encoder interface cards
Options For Enclosure	Safe standstill for power circuit
Configuration	PTC relay for power circuit
	Pt100 relay for power circuit
	Insulation monitoring for power circuit
	Design for IT networks for power circuit
	External 230 V supply terminals for power circuit
	Buffer voltage 24 V DC power supply for power circuit
	External 24 V DC supply terminals for power circuit
	Enclosure lighting for power circuit
	Key switch (local/remote) for power circuit
	Motor heating for power circuit
	External motor fan for power circuit
	Voltmeter for power circuit
	Door handle for main switch for power circuit
	Circuit breaker for power circuit
	Line contactor for power circuit
	12-pulse supply for power circuit
	Line reactor for power circuit
	Ammeter for power circuit
	Enclosure heating for power circuit
	Motor choke for power circuit
	Cable entry via the top for power circuit
	Enclosure plinth for power circuit
	Braking unit for power circuit
	Door handle for circuit breaker for power circuit
	Control terminals for control circuit
	Adaptor for 115 V logic inputs for control circuit
	Relay output C/O for control circuit
	Isolated amplifier for control circuit
Operating Position	Vertical +/- 10 degree
Colour Of Enclosure	Light grey (RAL 7035)
Colour Of Base Of Enclosure	Dark grey (RAL 7022)
Height	2362 mm
Width	1000 mm
Depth	642 mm
Net Weight	485 kg
Environment	

Electromagnetic Compatibility	1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3			
Pollution Degree	Voltage dips and interruptions immunity test conforming to IEC 61000-4-11 2 conforming to EN/IEC 61800-5-1			
p Degree Of Protection IP54				
Vibration Resistance	0.6 gn (f= 10200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 310 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3			

Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3				
Noise Level	64 dB conforming to 86/188/EEC				
Environmental Characteristic	Without condensation: 3C2 conforming to IEC 60721-3-3 Without condensation: 3K3 conforming to IEC 60721-3-3 Without condensation: 3S2 conforming to IEC 60721-3-3				
Relative Humidity	095 %				
Ambient Air Temperature For Operation	040 °C (without derating) 4050 °C (with current derating of 0.6 % per °C)				
Ambient Air Temperature For Storage	-2570 °C				
Volume Of Cooling Air	600 m3/h				
Operating Altitude	<= 1000 m without derating 10003000 m with current derating 1 % per 100 m				
Standards	EN 55011 class A group 2 EN 61800-3 environments 2 category C3 EN/IEC 61800-5-1 EN/IEC 61800-3 EN 61800-3 environments 1 category C3				
Product Certifications	ATEX GOST				
Marking	CE				

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	216.0 cm
Package 1 Width	66.0 cm
Package 1 Length	61.6 cm
Package 1 Weight	485.0 kg

Contractual warranty


Warranty

18 months


Dimensions Drawings

IP 54 Floor-Standing Enclosure with Separate Air Flows

Standard Floor-Standing Enclosure

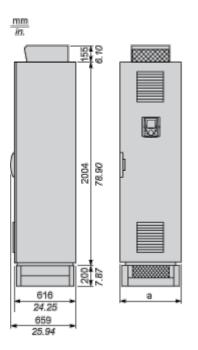

Standard Compact Floor-Standing Enclosure + Additional Floor-Standing Enclosures, According to the Configuration

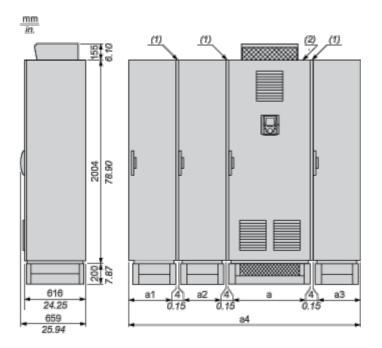

- (1) Seal. For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.
- (2) Standard version floor-standing enclosure.

NOTE: The position of the enclosures must be complied with during installation. The number of additional enclosures can vary according to the chosen configuration.

Options	а	a1	a2	a3	a4
With or without common options or options dependent on the drive rating	608 mm/ 23.9 in.	-	-	408 mm/ 16 in.	1020 mm/ 40.1 in.
Cable entry via the top option	608 mm/ 23.9 in.	-	-	408 mm/ 16 in.	1020 mm/ 40.1 in.
Cable entry via the top + motor choke option	600 mm/ 23.6 in.	-	408 mm/ 16 in.	408 mm/ 16 in.	1424 mm/ 56 in.


(3) Except sinus filter option, which requires an additional enclosure. The sinus filter option is not compatible with the cable entry via the top option.

(4) The cable entry via the top option is not compatible with the sinus filter option.

Connections and Schema

IP 54 Floor-Standing Enclosure with Separate Air Flows

Wiring Diagram

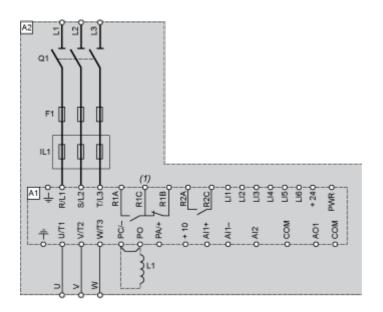

- A1 Drive
- A2 Enclosure
- F1 Fast-acting semi-conductor fuse
- IL1 Line choke
- L1 DC choke
- Q1 Switch
- (1) Fault relay contacts. For remote signalling of drive status.


Performance Curves

Floor-Standing Enclosure Compact Version

Derating Curves

The derating curves for the drive nominal current (In) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

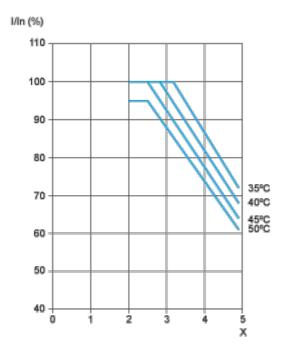

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.