# **Product datasheet**

Specifications





Variable speed drive, Altivar Process ATV600, ATV630, 0.75kW/1 hp, 200...240 V, IP21/UL type 1

ATV630U07M3

## Main

Walli	
Range Of Product	Altivar Process ATV600
Product Or Component Type	Variable speed drive
Product Specific Application	Process and utilities
Device Short Name	ATV630
Variant	Standard version
Product Destination	Asynchronous motors Synchronous motors
Emc Filter	Without EMC filter
Ip Degree Of Protection	IP21 conforming to IEC 61800-5-1 IP21 conforming to IEC 60529
[Us] Rated Supply Voltage	200240 V
Degree Of Protection	UL type 1 conforming to UL 508C
Type Of Cooling	Forced convection
Supply Frequency	5060 Hz - 55 %
[Us] Rated Supply Voltage	200240 V - 1510 %
Motor Power Kw	0.75 kW (normal duty) 0.37 kW (heavy duty)
Motor Power Hp	1 hp normal duty 0.5 hp heavy duty
Line Current	3 A at 200 V (normal duty) 2.6 A at 240 V (normal duty) 1.7 A at 200 V (heavy duty) 1.5 A at 240 V (heavy duty)
Prospective Line Isc	50 kA
Apparent Power	1.1 kVA at 240 V (normal duty) 0.6 kVA at 240 V (heavy duty)
Continuous Output Current	4.6 A at 4 kHz for normal duty 3.3 A at 4 kHz for heavy duty
Asynchronous Motor Control Profile	Variable torque standard Constant torque standard Optimized torque mode
Synchronous Motor Control Profile	Permanent magnet motor Synchronous reluctance motor
Speed Drive Output Frequency	0.1500 Hz
Nominal Switching Frequency	4 kHz
Switching Frequency	212 kHz adjustable 412 kHz with derating factor

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Safety Function	STO (safe torque off) SIL 3
Discrete Input Logic	16 preset speeds
Communication Port Protocol	Modbus TCP Modbus serial Ethernet
Option Card	Slot A: communication module, Profibus DP V1 Slot A: communication module, PROFINET Slot A: communication module, DeviceNet Slot A: communication module, Modbus TCP/EtherNet/IP Slot A: communication module, CANopen daisy chain RJ45 Slot A: communication module, CANopen SUB-D 9 Slot A: communication module, CANopen screw terminals Slot A/slot B: digital and analog I/O extension module Slot A/slot B: output relay extension module Slot A: communication module, Ethernet IP/Modbus TCP/MD-Link Communication module, BACnet MS/TP Communication module, Ethernet Powerlink

# Complementary

oompromentary	
Mounting Mode	Wall mount
Maximum Transient Current	5.1 A during 60 s (normal duty)
	5 A during 60 s (heavy duty)
Network Number Of Phases	3 phases
Discrete Output Number	0
Discrete Output Type	Relay outputs R1A, R1B, R1C 250 V AC 3000 mA
	Relay outputs R1A, R1B, R1C 30 V DC 3000 mA
	Relay outputs R2A, R2C 250 V AC 5000 mA
	Relay outputs R2A, R2C 30 V DC 5000 mA
	Relay outputs R3A, R3C 250 V AC 5000 mA
	Relay outputs R3A, R3C 30 V DC 5000 mA
Output Voltage	<= power supply voltage
Permissible Temporary Current	1.1 x In during 60 s (normal duty)
Boost	1.5 x In during 60 s (heavy duty)
Motor Slip Compensation	Automatic whatever the load
	Can be suppressed
	Adjustable
	Not available in permanent magnet motor law
Acceleration And Deceleration Ramps	Linear adjustable separately from 0.019999 s
Physical Interface	Ethernet
	2-wire RS 485
Braking To Standstill	By DC injection
Protection Type	Thermal protection: motor
	Safe torque off: motor
	Motor phase break: motor
	Thermal protection: drive
	Safe torque off: drive
	Overheating: drive
	Overcurrent between output phases and earth: drive Overload of output voltage: drive
	Short-circuit protection: drive
	Motor phase break: drive
	Overvoltages on the DC bus: drive
	Line supply overvoltage: drive
	Line supply undervoltage: drive
	Line supply phase loss: drive
	Overspeed: drive
	Break on the control circuit: drive
Transmission Rate	10, 100 Mbits
	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps
Frequency Resolution	Display unit: 0.1 Hz
· •	Analog input: 0.012/50 Hz
	÷ ,

Transmission Frame	RTU	
Electrical Connection	Control: removable screw terminals 0.51.5 mm²/AWG 20AWG 16 Motor: screw terminal 2.56 mm²/AWG 14AWG 10 Line side: screw terminal 2.56 mm²/AWG 14AWG 10	
Connector Type	RJ45 (on the remote graphic terminal) for Ethernet/Modbus TCP RJ45 (on the remote graphic terminal) for Modbus serial	
Data Format	8 bits, configurable odd, even or no parity	
Type Of Polarization	No impedance	
Exchange Mode	Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP	
Number Of Addresses	1247 for Modbus serial	
Method Of Access	Slave Modbus TCP	
Supply	External supply for digital inputs: 24 V DC (1930 V), <1.25 mA, protection type: overload and short-circuit protection Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection Internal supply for digital inputs and STO: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection	
Local Signalling	3 LEDs for local diagnostic 3 LEDs (dual colour) for embedded communication status 4 LEDs (dual colour) for communication module status 1 LED (red) for presence of voltage	
Width	144 mm	
Height	350 mm	
Depth	203 mm	
Net Weight	4.3 kg	
Analogue Input Number	3	
Analogue Input Type	Al1, Al2, Al3 software-configurable voltage: 010 V DC, impedance: 31.5 kOhm, resolution 12 bits Al1, Al2, Al3 software-configurable current: 020 mA, impedance: 250 Ohm, resolution 12 bits Al2 voltage analog input: - 1010 V DC, impedance: 31.5 kOhm, resolution 12 bits	
Discrete Input Number	8	
Discrete Input Type	DI7, DI8 programmable as pulse input: 030 kHz, 24 V DC (<= 30 V)	
Input Compatibility	DI1DI6: discrete input level 1 PLC conforming to IEC 61131-2 DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68 STOA, STOB: discrete input level 1 PLC conforming to IEC 61131-2	
Discrete Input Logic	Positive logic (source) (DI1DI8), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (DI1DI8), > 16 V (state 0), < 10 V (state 1)	
Analogue Output Number	2	
Analogue Output Type	Software-configurable voltage AQ1, AQ2: 010 V DC impedance 470 Ohm, resolution 10 bits Software-configurable current AQ1, AQ2: 020 mA, resolution 10 bits Software-configurable current DQ-, DQ+: 30 V DC Software-configurable current DQ-, DQ+: 100 mA	
Sampling Duration	2 ms +/- 0.5 ms (DI1DI4) - discrete input 5 ms +/- 1 ms (DI5, DI6) - discrete input 5 ms +/- 0.1 ms (AI1, AI2, AI3) - analog input 10 ms +/- 1 ms (AO1) - analog output	
Accuracy	+/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input +/- 1 % AO1, AO2 for a temperature variation 60 °C analog output	
Linearity Error	Al1, Al2, Al3: +/- 0.15 % of maximum value for analog input AO1, AO2: +/- 0.2 % for analog output	
Relay Output Number	3	

put (R1, R2, R3): 5 ms (+/- 0.5 ms)  put R1, R2, R3: 5 mA at 24 V DC  put R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC  put R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC  put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250  put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V  power and control terminals
put R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC put R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V
put R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 put R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V
power and control terminals
HVAC compressor centrifugal beverage processing other application neral and metal fan neral and metal pump as fan d waste water other application HVAC screw compressor beverage processing pump beverage processing fan beverage processing tam beverage processing fan beverage processing tam bever
W at 200240 V 3 phases

Insulation Resistance	> 1 MOhm 500 V DC for 1 minute to earth
Noise Level	54.5 dB conforming to 86/188/EEC
Power Dissipation In W	Natural convection: 27 W at 200 V, switching frequency 4 kHz Forced convection: 28 W at 200 V, switching frequency 4 kHz
Volume Of Cooling Air	38 m3/h
Operating Position	Vertical +/- 10 degree
Maximum Thdi	<48 % full load conforming to IEC 61000-3-12
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6
Pollution Degree	2 conforming to IEC 61800-5-1
Vibration Resistance	1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6 1 gn (f= 13200 Hz) conforming to IEC 60068-2-6

Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27	
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3	
Ambient Air Temperature For Operation	-1550 °C (without derating) 5060 °C (with derating factor)	
Ambient Air Temperature For Storage	-4070 °C	
Operating Altitude	<= 1000 m without derating 10004800 m with current derating 1 % per 100 m	
Product Certifications	TÜV CSA ATEX zone 2/22 ATEX INERIS DNV-GL UL	
Marking	CE	
Standards	UL 508C IEC 61800-3 IEC 61800-3 environment 1 category C2 EN/IEC 61800-3 environment 2 category C3 IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1	
Overvoltage Category	III	
Regulation Loop	Adjustable PID regulator	
Noise Level	54.5 dB	
Pollution Degree	2	

# **Packing Units**

PCE
1
31.500 cm
19.000 cm
40.500 cm
5.717 kg
P06
6
75.000 cm
60.000 cm
80.000 cm
47.302 kg

# Sustainability Green Premium™

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Resource performance



Upgraded Components Available

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes


### **Certifications & Standards**


Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

### **Dimensions Drawings**

#### **Dimensions**


## **Drives with IP21 Top Cover** Right and Front Views

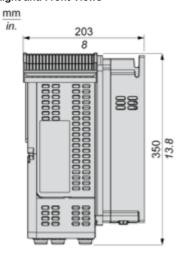


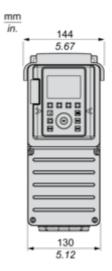

## **Drives Without IP21 Top Cover**

#### Left and Rear Views

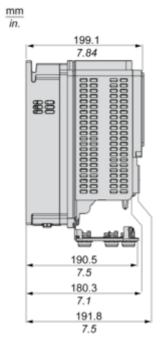


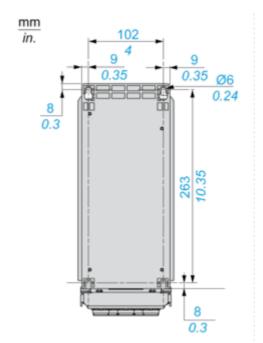

## ATV630U07M3

Mounting and Clearance


## Clearances

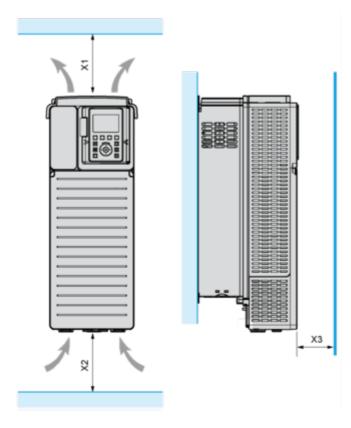

X1	X2	X3
≥ 100 mm (3.94 in.)	≥ 100 mm (3.94 in.)	≥ 10 mm (0.39 in.)


## **Mounting Types**

### Mounting Type A: Individual IP21

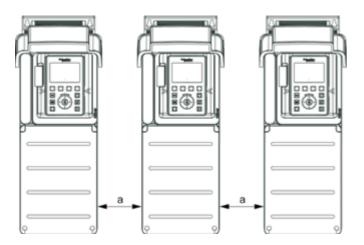


a ≥ 100 mm (3.94 in.)

## Mounting Type B: Side by Side IP20

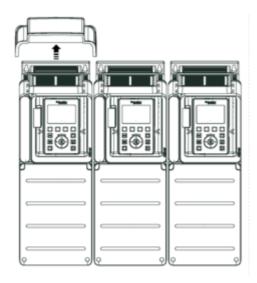

Mounting Type C: Individual IP20

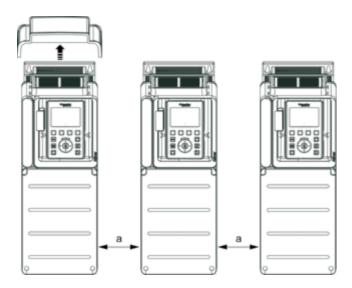


a ≥ 0

## ATV630U07M3

#### Connections and Schema

### Three-Phase Power Supply with Upstream Breaking via Line Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

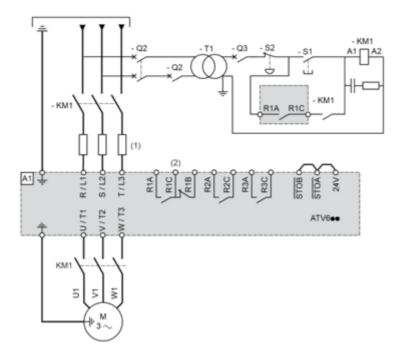

(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.


A1 : Drive

KM1 : Line Contactor Q2, Q3 : Circuit breakers S1, S2 : Pushbuttons

T1: Transformer for control part

## Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

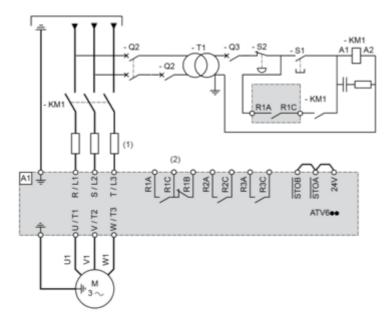


(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive KM1 : Contactor

## **Control Block Wiring Diagram**

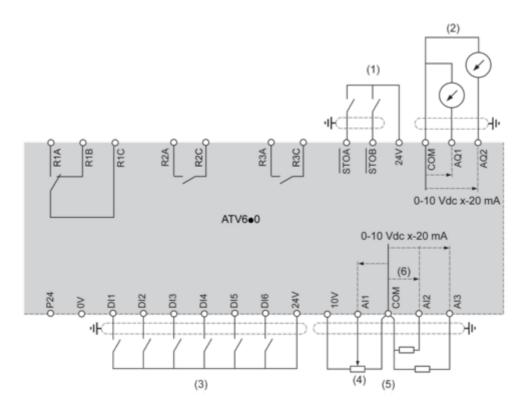


- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input

R1A, R1B, R1C : Fault relay R2A, R2C : Sequence relay R3A, R3C : Sequence relay

#### **Sensor Connection**

It is possible to connect either 1 or 3 sensors on terminals Al2 or Al3.




## ATV630U07M3

### Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


#### Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

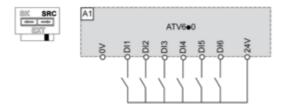


#### Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

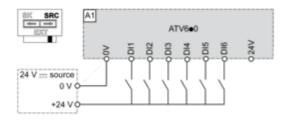

### Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

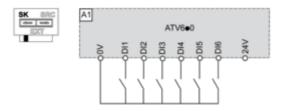

### Switch Set to EXT Position Using an External Power Supply for the DIs

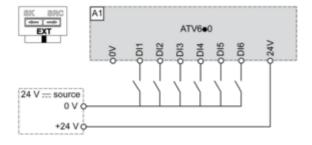


## **Product datasheet**

## ATV630U07M3

### Performance Curves

### **Derating Curves**

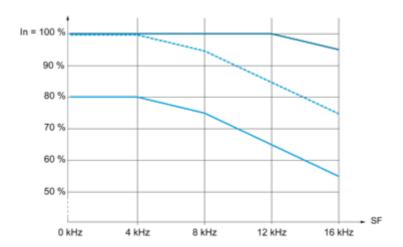

40 °C (104 °F) - Mounting type A, B and C 50 °C (122 °F) - Mounting type A, B and C 60 °C (140 °F) - Mounting type B and C

In: Nominal Drive Current SF: Switching Frequency