Product datasheet

Specifications



(!) Discontinued - Service only

enclosed variable speed drive ATV71 Plus - 500 kW - 400V - IP54 SA

ATV71EXS5C50N4

- () Discontinued on: 29 Oct 2022
- (!) To be end-of-service on: 31 Dec 2028

Main

mann				
Range Of Product	Altivar 71 Plus			
Product Or Component Type	Variable speed drive			
Device Short Name	ATV71 Plus			
Product Destination	Synchronous motors			
	Asynchronous motors			
Product Specific Application	Complex, high-power machines			
Assembly Style	In floor-standing enclosure with separate air flows			
Product Composition	A wired ready-assembled Sarel Spacial 6000 enclosure			
	Terminals/bars for motor connection			
	ATV71HC50N4 drive on heatsink			
	A DC choke			
	A plinth			
	An IP65 remote mounting kit for graphic display terminal			
	A switch and fast-acting semi-conductor fuses			
Emc Filter	Integrated			
Network Number Of Phases	3 phases			
Rated Supply Voltage	380415 V +/- 10 %			
Supply Voltage Limits	342457 V			
Supply Frequency	5060 Hz +/- 5 %			
Network Frequency	47.563 Hz			
Motor Power Kw	500 kW at 380415 V			
Line Current	834 A for 400 V / 500 kW			

Complementary

Apparent Power	577 kVA for 400 V / 500 kW		
Prospective Line Isc	50 kA with external fuses		
Continuous Output Current	941 A at 2.5 kHz, 400 V / 500 kW		
Maximum Transient Current	1411 A for 60 s / 500 kW		
Speed Drive Output Frequency	0.1500 Hz		
Nominal Switching Frequency	2.5 kHz		
Switching Frequency	2.58 kHz with derating factor 28 kHz adjustable		

Speed Range	1100 for asynchronous motor in open-loop mode, without speed feedback 11000 for asynchronous motor in closed-loop mode with encoder feedback 150 for synchronous motor in open-loop mode, without speed feedback			
Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to T +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn			
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback			
Transient Overtorque	170 % of nominal motor torque for 60 s 220 % of nominal motor torque for 2 s			
Braking Torque	<= 150 % with braking or hoist resistor 30 % without braking resistor			
Asynchronous Motor Control Profile	Voltage/frequency ratio, 2 points Flux vector control without sensor, standard Flux vector control without sensor, ENA (energy Adaptation) system Voltage/frequency ratio, 5 points Flux vector control with sensor, standard Flux vector control without sensor, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f			
Synchronous Motor Control Profile	Vector control without sensor, standard Vector control with sensor, standard			
Regulation Loop	Adjustable PI regulator			
Motor Slip Compensation	Suppressable Not available in voltage/frequency ratio (2 or 5 points) Automatic whatever the load Adjustable			
Overvoltage Category	Class 3 conforming to EN 50178			
Local Signalling	LCD display unit for operation function, status and configuration - mounted in the front door			
Output Voltage	<= rated supply voltage			
solation	Electrical between power and control			
Type Of Cable For External Connection	IEC cable at 40 °C, copper 70 °C / PVC			
Electrical Connection	Terminal - 2.5 mm² / AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, LI1LI6, PWR) bottom entry Bar M12 - 6 x 300 mm² (L1/R, L2/S, L3/T) bottom entry Bar M12 - 6 x 240 mm² (U/T1, V/T2, W/T3) bottom entry			
Motor Recommanded Cable Cross Section	4 (3 x 185) mm²			
Short-Circuit Protection	1250 A fuse protection type gl - power supply upstream			
Supply	External supply: 24 V DC (1930 V), <1 A Internal supply for reference potentiometer: 10 V DC (1011 V), <10 mA Internal supply: 24 V DC (2127 V), <100 mA			
Analogue Input Number	2			
Analogue Input Type	Al1-/Al1+ bipolar differential voltage: +/- 10 V DC, 24 V max, sampling time: 1.5 ms, resolution: 11 bits + sign Al2 software-configurable voltage: 010 V DC, impedance: 30000 Ohm, sampling time: 1.52.5 ms, resolution: 11 bits Al2 software-configurable current: 020 mA, 24 V max, impedance: 250 Ohm, sampling time: 1.52.5 ms, resolution: 11 bits			
Analogue Output Number	1			
Analogue Output Type	Software-configurable voltage: (AO1) 010 V DC - 500 Ohm - sampling time: 1.5 2.5 ms - resolution: 10 bits Software-configurable current: (AO1) 020 mA/420 mA - 470 Ohm - sampling time: 1.52.5 ms - resolution: 10 bits			
Discrete Output Number	2			
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C)NO/NC - 6.57.5 ms - 100000 cycles Configurable relay logic: (R2A, R2B)NO - 6.57.5 ms - 100000 cycles			

Minimum Switching Current	3 mA at 24 V DC (configurable relay logic)			
Maximum Switching Current	5 A at 250 V AC on resistive load - cos phi = 1 (R1, R2) 5 A at 30 V DC on resistive load - $L/R = 0$ ms (R1, R2) 2 A at 250 V AC on inductive load - cos phi = 0.4 (R1, R2) 2 A at 30 V DC on inductive load - $L/R = 7$ ms (R1, R2)			
Discrete Input Number	7			
Discrete Input Type	Programmable (LI1LI5) at 24 V DC <= 30 V level 1 PLC 3.5 kOhm (duration=1.5 2.5 ms) Switch-configurable (LI6) at 24 V DC <= 30 V level 1 PLC 1.5 kOhm (duration=1.5 2.5 ms) Safety input (PWR) at 24 V DC <= 30 V 1.5 kOhm			
Discrete Input Logic	Positive logic (source) (LI1LI6), 05 V (state 0), 1130 V (state 1) Negative logic (sink) (LI1LI6), 1630 V (state 0), 010 V (state 1) Positive logic (source) (PWR), 02 V (state 0), 1730 V (state 1)			
Acceleration And Deceleration Ramps	S, U or customized Linear adjustable separately from 0.01 to 9000 s			
Braking To Standstill	By DC injection			
Protection Type	Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Line supply undervoltage: drive Overcurrent between output phases and earth: drive Overchareting protection: drive Overvoltages on the DC bus: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor			
Dielectric Strength	3535 V DC between earth and power terminals 5092 V DC between control and power terminals			
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth			
Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz			
Communication Port Protocol	Modbus CANopen			
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen			
Physical Interface	2-wire RS 485 for Modbus			
Transmission Frame	RTU for Modbus			
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen			
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal			
Type Of Polarization	No impedance for Modbus			
Number Of Addresses	1127 for CANopen 1247 for Modbus			
Method Of Access	Slave CANopen			

Communication card for CC-Link
Communication card for CC-Link Communication card for DeviceNet
Communication card for EtherNet/IP
Communication card for Fipio
Communication card for Interbus-S
Communication card for Modbus Plus
Communication card for Modbus/Uni-Telway
Communication card for Profibus DP
Communication card for Profibus DP V1
Communication card for Modbus TCP/IP
Controller inside programmable card
Basic I/O extension card
Extended I/O extension card
Encoder interface cards
Safe standstill for power circuit
PTC relay for power circuit
Pt100 relay for power circuit
Insulation monitoring for power circuit
Design for IT networks for power circuit
External 230 V supply terminals for power circuit
Buffer voltage 24 V DC power supply for power circuit
External 24 V DC supply terminals for power circuit
Enclosure lighting for power circuit
Key switch (local/remote) for power circuit
Motor heating for power circuit
External motor fan for power circuit
Voltmeter for power circuit
Door handle for main switch for power circuit
Circuit breaker for power circuit
Line contactor for power circuit
12-pulse supply for power circuit
Line reactor for power circuit
Ammeter for power circuit
Enclosure heating for power circuit
Motor choke for power circuit
Cable entry via the top for power circuit
Enclosure plinth for power circuit
Braking unit for power circuit
Door handle for circuit breaker for power circuit
Control terminals for control circuit
Adaptor for 115 V logic inputs for control circuit
Relay output C/O for control circuit
Isolated amplifier for control circuit
Vertical +/- 10 degree
Light grey (RAL 7035)
Dark grey (RAL 7022)
2362 mm
1600 mm
642 mm
900 kg

Electromagnetic Compatibility	1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11			
Pollution Degree	2 conforming to EN/IEC 61800-5-1			
Ip Degree Of Protection	IP54			
Vibration Resistance	0.6 gn (f= 10200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 310 Hz) conforming to EN/IEC 60068-2-6 3M3 conforming to EN/IEC 60721-3-3			

Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27 3M2 conforming to EN/IEC 60721-3-3			
Noise Level	73 dB conforming to 86/188/EEC			
Environmental Characteristic	Without condensation: 3C2 conforming to IEC 60721-3-3 Without condensation: 3K3 conforming to IEC 60721-3-3 Without condensation: 3S2 conforming to IEC 60721-3-3			
Relative Humidity	095 %			
Ambient Air Temperature For Operation	040 °C (without derating) 4050 °C (with current derating of 1.2 % per °C)			
Ambient Air Temperature For Storage	-2570 °C			
Volume Of Cooling Air	3000 m3/h			
Operating Altitude	<= 1000 m without derating 10003000 m with current derating 1 % per 100 m			
Standards	EN/IEC 61800-3 EN 55011 class A group 2 EN 61800-3 environments 1 category C3 EN/IEC 61800-5-1 EN 61800-3 environments 2 category C3			
Product Certifications	ATEX GOST			
Marking	CE			

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	216.0 cm
Package 1 Width	66.0 cm
Package 1 Length	101.6 cm
Package 1 Weight	900.0 kg

Contractual warranty


Warranty

18 months


Dimensions Drawings

IP 54 Floor-Standing Enclosure with Separate Air Flows

Standard Compact Floor-Standing Enclosure

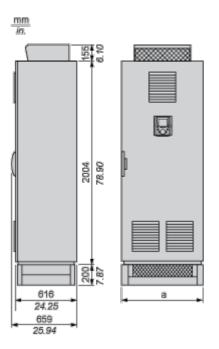

Standard Floor-Standing Enclosure + Additional Enclosures, According to the Configuration

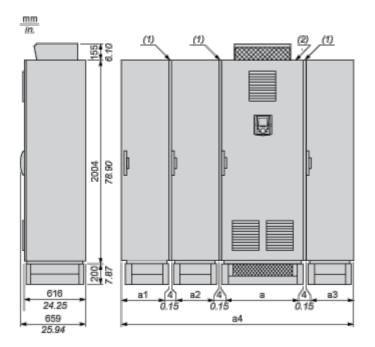

- (1) Seal. For each floor-standing enclosure added, allow a 4 mm/0.15 in. space for the seal.
- (2) Standard version floor-standing enclosure.


NOTE: The position of the enclosures must be complied with during installation. The number of additional enclosures can vary according to the chosen configuration.

Options	а	a1	a2	а3	a4
With or without common options or options (3) dependent on the drive rating	1208 mm/ 47.5 in.	-	408 mm/ 16 in.	-	1620 mm/ 63.7 in.
Cable entry via the top option (4)	1200 mm/ 47.2 in.	-	408 mm/ 16 in.	408 mm/ 16 in.	2024 mm/ 79.6 in.
Braking unit option only and/or options (3) dependent on rating	1208 mm/ 47.5 in.	408 mm/ 16 in.	400 mm/ 15.7 in.	-	2024 mm/ 79.6 in.
Braking unit + cable entry via the top options (4)	1200 mm/ 47.2 in.	408 mm/ 16 in.	400 mm/ 15.7 in.	408 mm/ 16 in.	2428 mm/ 95.5 in.
Motor choke option	1200 mm/ 47.2 in.	-	408 mm/ 16 in.	408 mm/ 16 in.	2024 mm/ 79.6 in.
Sinus filter option	1200 mm/ 47.2 in.	-	408 mm/ 16 in.	808 mm/ 31.8 in.	2424 mm/ 95.4 in.
 (3) Except sinus filter option, which requires an additional enclosure. The sinus filter option is not compatible with the cable entry via the top option. (4) The cable entry via the top option is not compatible with the sinus filter option. 					

Connections and Schema

IP 54 Floor-Standing Enclosure with Separate Air Flows

Wiring Diagram

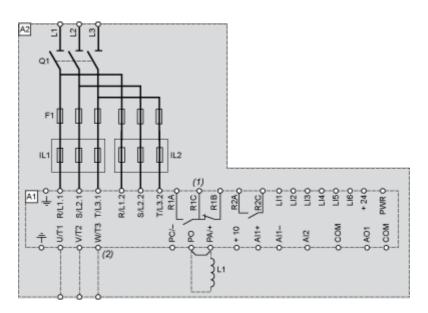

- A1 Drive
- A2 Enclosure
- F1 Fast-acting semi-conductor fuse
- IL1, IL2 Line chokes
- L1 DC choke
- Q1 Switch
- (1) Fault relay contacts. For remote signalling of drive status.
- (2) Only for ATV•1EXS5•••N and ATV•1EXS5•••Y.


Performance Curves

Ready to Use IP 54 Enclosure

Derating Curves

The derating curves for the drive nominal current (In) are dependent on the temperature and switching frequency. For intermediate temperatures, interpolate between 2 curves.

NOTE: The drive will reduce the switching frequency automatically in the event of excessive temperature rise.

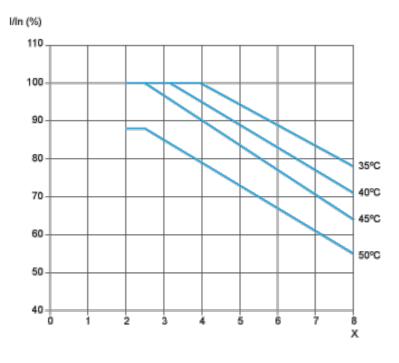

X Switching frequency (kHz)

NOTE: The temperatures shown correspond to the temperature of the air entering the enclosure.