

Termékadatlap

Műszaki adatok



Harmony műanyag nyomógomb fej,
Ø22, visszatérő, fehér, "fel nyíl",
fehér perem

ZB5AA334C1

Fő jellemzők

Termékválaszték	Harmony XB5R Harmony XALG
Termék Vagy Alkatrész Típusa	Fej
Készülék Rövid Neve	ZB5F
Külső Tokozaat Anyaga	Fehér színezett műanyag
Szerelési Átmérő	22 mm
Fej Típusa	Szabványos
Minimális Rendelési Mennyiség	1
Jelzőegység Fej	Kerek
Kezelő Típusa	rugós
Kezelőprofil	Fehér süllyesztett, felfelé nyíl (fekete)

Kiegészítő jellemzők

Cad Teljes Szélesség	29 mm
Cad Teljes Magasság	29 mm
Cad Teljes Mélység	28 mm
Nettó Súly	0,018 kg
Mechanikai Tartósság	10000000 ciklus
Állomás Neve	XALD 1...5 furat XALK 2...5 furat
Elektromos Felpítés Kódja	C1 esetén <9 érintkezők segítségével egyszeres blokkok in mellső szerelésű C2 esetén <9 érintkezők segítségével szimpla és dupla blokkok in mellső szerelésű C11 esetén <3 érintkezők segítségével egyszeres blokkok in mellső szerelésű C15 esetén <1 érintkezők segítségével egyszeres blokkok in mellső szerelésű SF1 esetén <3 érintkezők segítségével egyszeres blokkok in mellső szerelésű SR1 esetén <3 érintkezők segítségével egyszeres blokkok in hátoldalra szerelhető

Környezet

Védőkezelés	TH kérésre
Környezeti Levegő Hőmérséklete A Tároláshoz	-40...70 °C
Környezeti Levegő Hőmérséklete A Működéshez	-40...70 °C
Tűlfeszültségi Kategória	II. osztály megfelel IEC 60536
Ip Védettségi Szint	IP669 megfelel MSZ EN 60529 IP671
Nema Védettségi Szint	NEMA 13 NEMA 4X

Nettó ár

Korlátozott felelősségi nyilatkozat: E dokumentáció nem azzal a céllal készült, hogy e termékek egyedi felhasználói alkalmazásait helyettesítse, és nem szabad ezek megfizethetőségének vagy megbízhatóságának megállapítására felhasználni

Ellenállás Nagy Nyomású Mosóval Szemben	7000000 Pa -55 °C, távolság: 0,1 m
Ik Védettségi Fok	IK03 conforming to IEC 50102
Terméktanúsítványok	BV LROS (függőben) CSA-Ex DNV-GL GOST UL listed
Ütésállóság	35 gn (időtartam = 18 ms) esetén halogén fény megfelel IEC 60068-2-27, Ea tesztek 5 gn (időtartam = 11 ms) esetén halogén fény megfelel IEC 60068-2-27, Ea tesztek
Rezgési Ellenállás	5 Gn konstans gyorsulás (f= 2...500 Hz) megfelel IEC 60068-2-6

Csomagolási egység

1. Csomag-Csomagolási Egység Tipusa	PCE
Egységek Száma 1. Csomagban	1
1. Csomag Magassága	4,2 cm
1. Csomag Szélessége	3,3 cm
1.Csomag Hossza	5,2 cm
1. Csomag Súlya	17 g

Fenntarthatóság

A **Green Premium™** címke a Schneider Electric elkötelezettsége azíránt, hogy kategóriájában vezető környezetvédelmi teljesítményű termékeket szállítson. A Green Premium a legújabb szabályozásoknak való megfelelést, a környezeti hatások átláthatóságát, valamint körforgásos és alacsony CO₂-kibocsátású termékeket ígér.

A termék fenntarthatóságának felmérésére vonatkozó útmutató egy fehér könyv, amely tisztázza a globális ökocímke-szabványokat és a környezetvédelmi nyilatkozatok értelmezését.

[Részletek a Green Premium programról >](#)

[Útmutató kereskedelmi termékek fenntarthatóságának felméréséhez >](#)

Jólléti teljesítmény

✓ Reach: A Különös Aggodalomra Okot Adó Anyagoktól (Svhc) Mentés

✓ Higanymentes

✓ Rohs Korlátozás Alóli Kivétel [Igen](#)


Reach Rendelet [REACH nyilatkozat](#)

Eu Rohs Irányelv Proaktív megfelelés (A termék nem tartozik az EU RoHS jogi hatálya alá)

Kínai Rohs Rendelet [Kínai RoHS nyilatkozat](#)

Dimensions Drawings


Dimensions

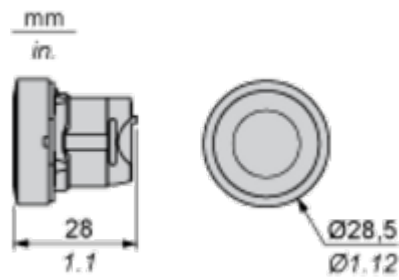

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

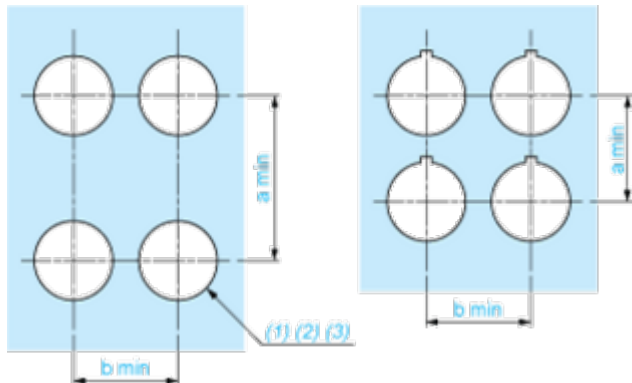

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess

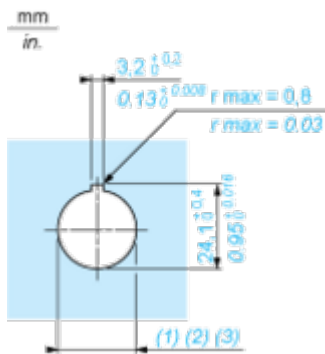

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. } \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer’s Side)

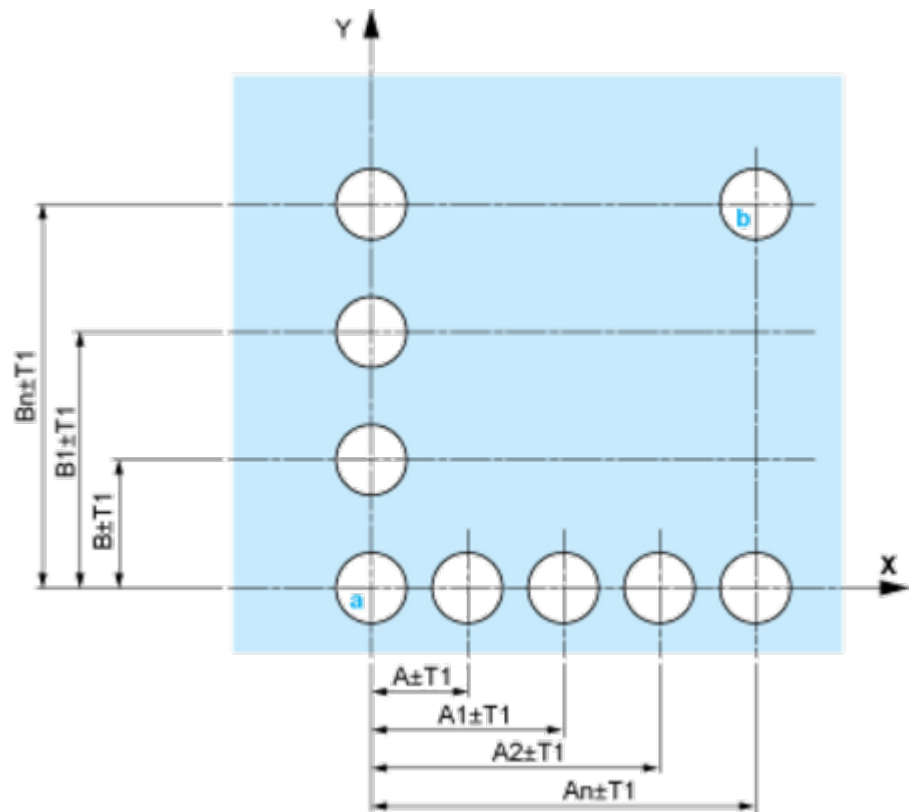


A: 30 mm min. / 1.18 in. min.
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

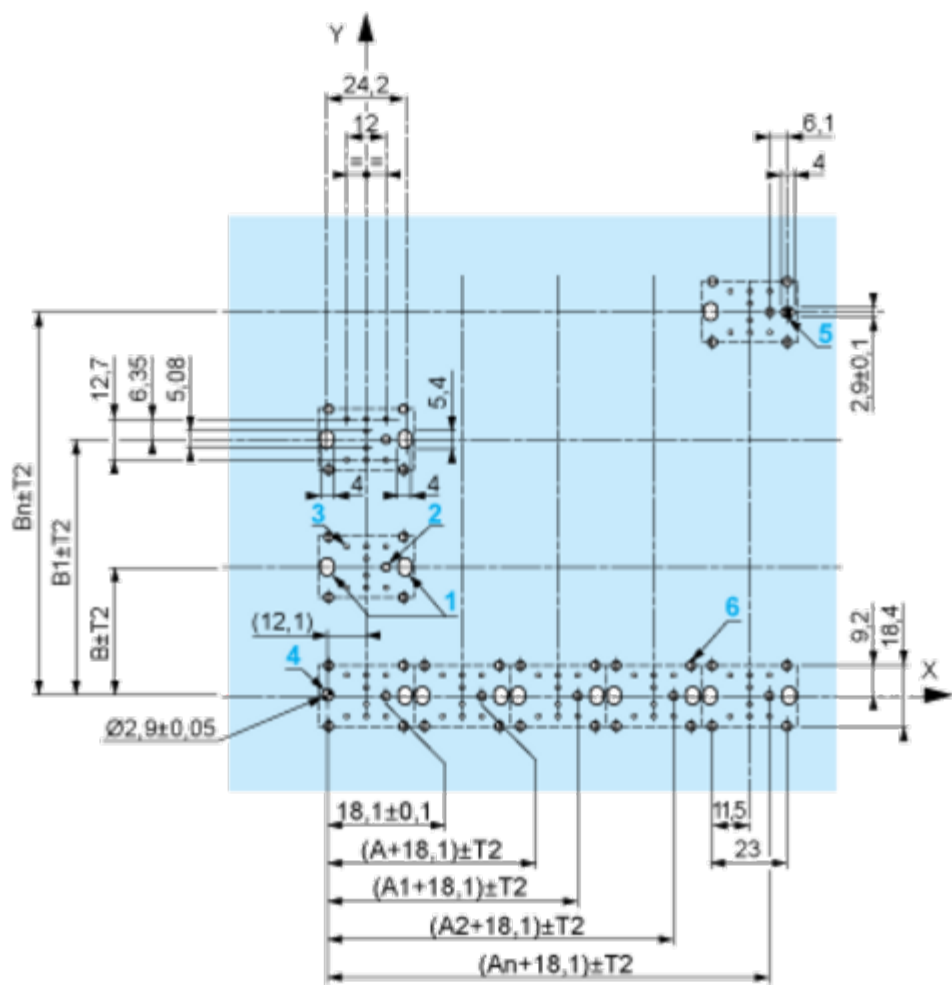

A: 30 mm min.
B: 40 mm min.
Dimensions in in.

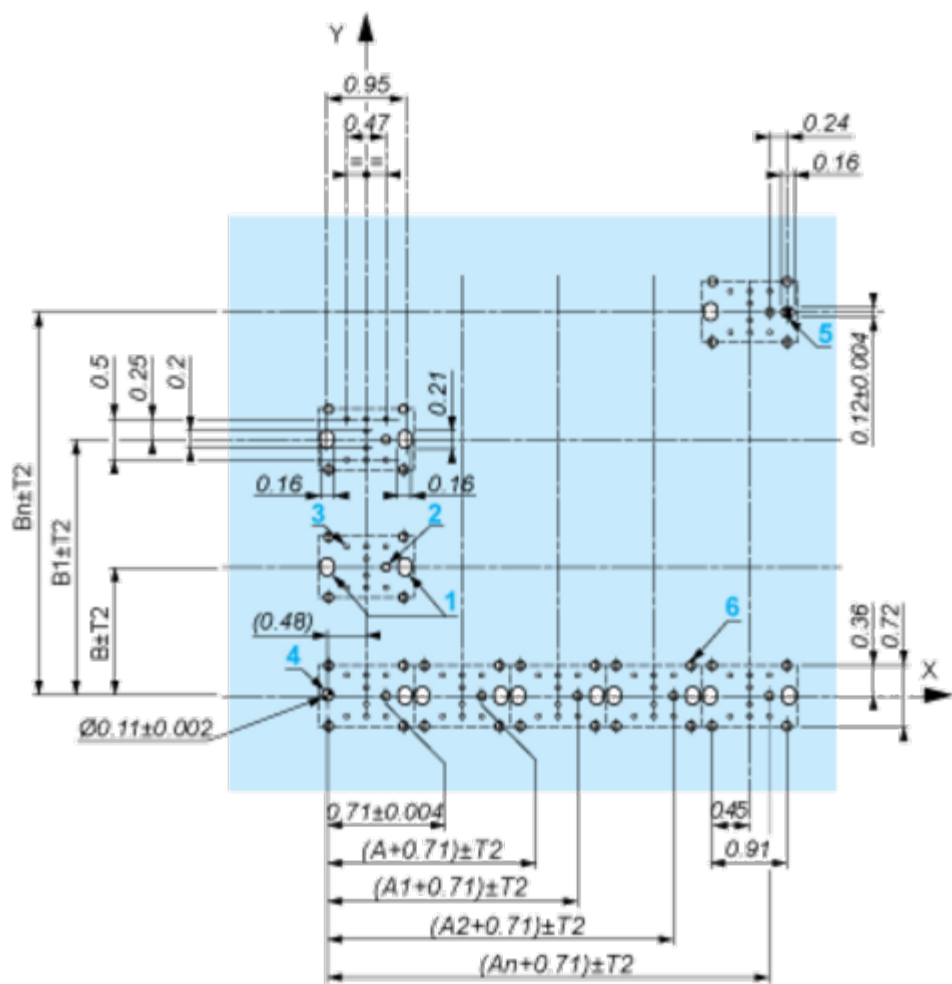

A: 1.18 in. min.
B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm $\pm$ 0.1 / 0.88 in. $\pm$ 0.004
- Orientation of body/fixing collar ZB5AZ009: $\pm 2^{\circ}30'$ (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

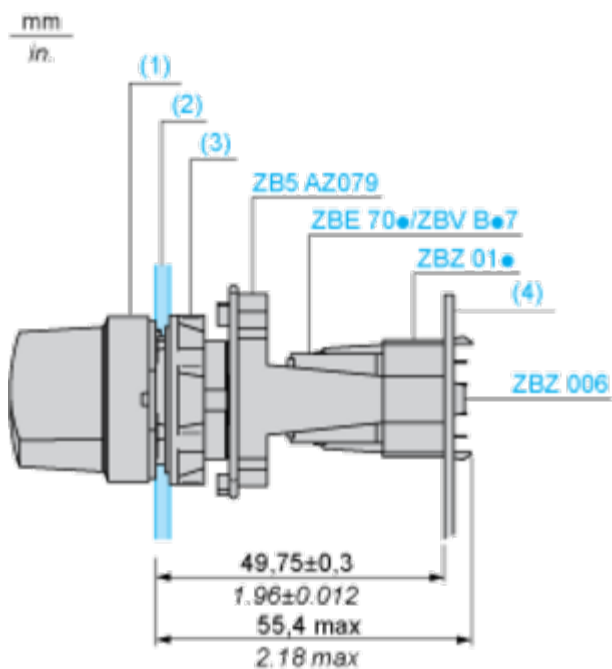

- (1) Head ZB5AD•
 (2) Panel
 (2) Nut
 (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ for centring adapter ZBZ01•
- 3 $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$ holes
- 4 1 hole $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$ for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location

