Specifications





## Head for key selector switch, Harmony XB4, Ø22 mm 2 position stay put 455

ZB4BG47

() Discontinued on: 9 Feb 2023

() Discontinued

### Main

Range Of Product	Harmony XB4				
Product Or Component Type	Head for key selector switch				
Device Short Name	ZB4				
Bezel Material	Black metal				
Mounting Diameter	22 mm				
Head Type	Standard				
Sale Per Indivisible Quantity	1				
Shape Of Signaling Unit Head	Round				
Operator Profile	Black key switch				
Type Of Operator	Stay put				
Operator Position Information	2 positions 90°				
Type Of Keylock	Key 455				
Key Withdrawal Position	In any position				

## Complementary

Cad Overall Width	29 mm				
Cad Overall Height	29 mm				
Cad Overall Depth	72 mm				
Net Weight	0.098 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	C3 for <6 contacts using single blocks in front mounting C4 for <6 contacts using single and double blocks in front mounting C5 for <5 contacts using single blocks in front mounting C6 for <5 contacts using single and double blocks in front mounting C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting				
Device Presentation	Basic element				

#### Environment

Protective Treatment	TH
Ambient Air Temperature For Storage	-4070 °C

Life Is On Schneider

Ambient Air Temperature For Operation	-4070 °C				
Overvoltage Category	Class I conforming to IEC 60536				
Ip Degree Of Protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K				
Nema Degree Of Protection	NEMA 13 NEMA 4X				
Standards	EN/IEC 60947-5-5 UL 508 CSA C22.2 No 14 GB 14048.5 EN/IEC 60947-5-4 EN/IEC 60947-5-1 EN/IEC 60947-1				
Product Certifications	UL listed BV CSA DNV GL LROS (Lloyds register of shipping)				
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6				
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27				

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.8 cm
Package 1 Width	3.4 cm
Package 1 Length	5.4 cm
Package 1 Weight	69.0 g

## **Contractual warranty**

Warranty

18 months

## Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance




Rohs Exemption Information
Yes

### **Certifications & Standards**

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Circularity Profile	End of Life Information		


### **Dimensions Drawings**

#### Dimensions




Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

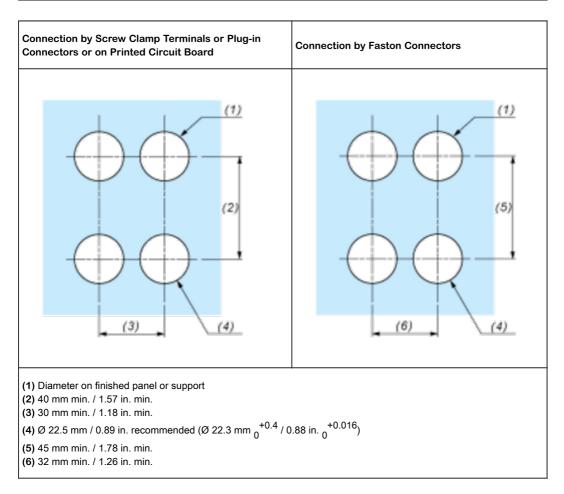

#### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

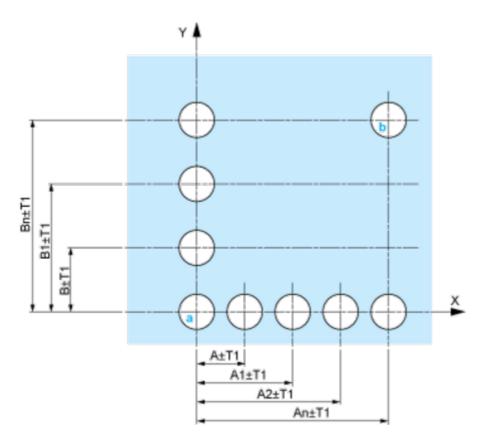


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

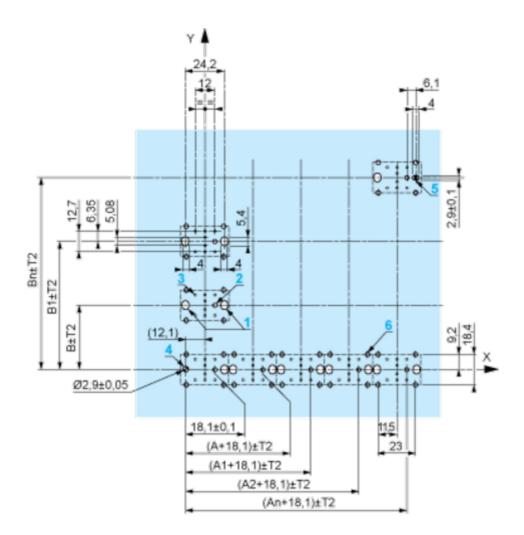

A: 30 mm min. B: 40 mm min. Dimensions in in.

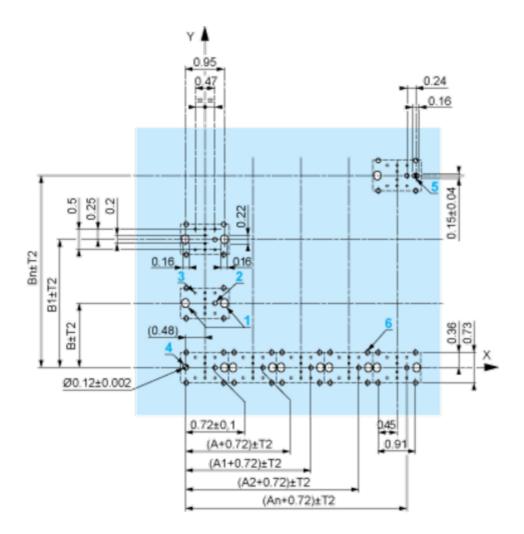

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2<sup>°</sup>30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
    - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

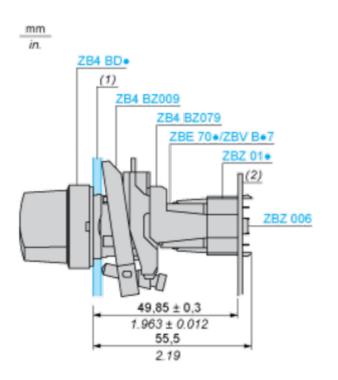

(1) Panel


(2) Printed circuit board


#### Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- $_{\bullet}$  2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01-
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.


**Technical Description** 














Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



#### Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



#### Legend

Single contact



Double contact



Light block



Possible location



### Sequence of Contacts Fitted to 2-position Selector Switch Body

#### Position 315°



	Position	Тор			
Push		Bottom	$\bigtriangleup$	$\bigtriangleup$	$\bigtriangleup$
	Location		Left	Centre	Right
State			0	0	0
N/O			open	open	open
Contacts	N/C		closed	closed	closed

#### Position 45°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	1
Contacts	N/O		closed	closed	closed
	N/C		open	open	open