Product datasheet

Specification





variable speed drive, Easy Altivar 310, 22kW, 30hp, 380 to 460V, 3 phase, with filter

ATV310HD22N4EF

Main

Range Of Product	Easy Altivar 310
Product Or Component Type	Variable speed drive
Product Specific Application	Simple machine
Assembly Style	With heat sink
Device Short Name	ATV310
Network Number Of Phases	Three phase
[Us] Rated Supply Voltage	380460 V - 1510 %
Motor Power Kw	22 kW for heavy duty 30 kW for normal duty
Motor Power Hp	30 hp for heavy duty 40 hp for normal duty
Noise Level	50 dB

Complementary

•					
Quantity Per Set	Set of 1				
Emc Filter	Integrated				
Type Of Cooling	Integrated fan				
Communication Port Protocol	Modbus				
Connector Type	RJ45 (on front face) for Modbus				
Physical Interface	2-wire RS 485 for Modbus				
Transmission Frame	RTU for Modbus				
Transmission Rate	4800 bit/s 9600 bit/s 19200 bit/s 38400 bit/s				
Number Of Addresses	1247 for Modbus				
Communication Service	Read holding registers (03) 29 words Write single register (06) 29 words Write multiple registers (16) 27 words Read/write multiple registers (23) 4/4 words Read device identification (43)				
Line Current	64.2 A at 380 V (heavy duty) 71.2 A at 380 V (normal duty) 53.2 A at 460 V (heavy duty) 59.2 A at 460 V (normal duty)				
Apparent Power	46.2 kVA at 460 V (heavy duty) 47 kVA at 460 V (normal duty)				

Prospective Line Isc	22 kA (heavy duty) 5 kA (normal duty)							
Continuous Output Current	46 A heavy duty 60 A normal duty							
Maximum Transient Current	69 A during 60 s (heavy duty) 66 A during 60 s (normal duty)							
Power Dissipation In W	568.8 W, at In (heavy duty) 735.6 W, at In (normal duty)							
Speed Drive Output Frequency	0.5400 Hz							
Nominal Switching Frequency	4 kHz							
Switching Frequency	212 kHz adjustable							
Speed Range	120 for asynchronous motor							
Transient Overtorque	$170200\ \%$ of nominal motor torque depending on drive rating and type of motor							
Braking Torque	Up to 150 $\%$ of nominal motor torque with braking resistor Up to 70 $\%$ of nominal motor torque without braking resistor							
Asynchronous Motor Control Profile	Voltage/frequency ratio (V/f) Voltage/frequency ratio - Energy Saving, quadratic U/f Sensorless vector control (SVC)							
Motor Slip Compensation	Adjustable							
Output Voltage	380460 V three phase							
Electrical Connection	Terminal, clamping capacity: 2535 $\rm mm^2$, AWG 3AWG 2 (L1, L2, L3, PA/+, PB, U, V, W)							
Tightening Torque	2.22.4 N.m							
Insulation	Electrical between power and control							
Supply	Internal supply for reference potentiometer: 5 V (4.755.25 V)DC, <10 mA with overload and short-circuit protection Internal supply for logic inputs: 24 V (20.428.8 V)DC, <100 mA with overload and short-circuit protection							
Analogue Input Number	1							
Analogue Input Type	Configurable current Al1 020 mA 250 Ohm Configurable voltage Al1 010 V 30 kOhm Configurable voltage Al1 05 V 30 kOhm							
Discrete Input Number	4							
Discrete Input Type	Programmable LI1LI4 24 V 1830 V							
Discrete Input Logic	Negative logic (sink), > 16 V (state 0), < 10 V (state 1), input impedance 3.5 kOhm Positive logic (source), 0< 5 V (state 0), > 11 V (state 1)							
Sampling Duration	10 ms for analogue input 20 ms, tolerance +/- 1 ms for logic input							
Linearity Error	+/- 0.3 % of maximum value for analogue input							
Analogue Output Number	1							
Analogue Output Type	AO1 software-configurable voltage: 010 V AC 010 V 00.02 A, impedance: 470 Ohm, resolution 8 bits AO1 software-configurable current: 020 mA, impedance: 800 Ohm, resolution 8 bits							
Discrete Output Number	2							
Discrete Output Type	Logic output LO+, LO- Protected relay output R1A, R1B, R1C 1 C/O							
Minimum Switching Current	5 mA at 24 V DC for logic relay							
Maximum Switching Current	2 A at 250 V AC on inductive load cos phi = 0.4 L/R = 7 ms for logic relay 2 A at 30 V DC on inductive load cos phi = 0.4 L/R = 7 ms for logic relay 3 A at 250 V AC on resistive load cos phi = 1 L/R = 0 ms for logic relay 4 A at 30 V DC on resistive load cos phi = 1 L/R = 0 ms for logic relay							

Acceleration And Deceleration Ramps	Linear from 0999.9 s S U					
Braking To Standstill	By DC injection, <30 s					
Protection Type	Line supply overvoltage Line supply undervoltage Overcurrent between output phases and earth Overheating protection Short-circuit between motor phases Against input phase loss in three-phase Thermal motor protection via the drive by continuous calculation of I ² t					
Frequency Resolution	Analog input: converter A/D, 10 bits Display unit: 0.1 Hz					
Time Constant	20 ms +/- 1 ms for reference change					
Operating Position	Vertical +/- 10 degree					
Height	390 mm					
Width	180 mm					
Depth	212 mm					
Net Weight	9.7 kg					
Supply Frequency	50/60 Hz +/- 5 %					
Product Destination	Asynchronous motors					
Prospective Line Isc	22 kA 5 kA					

Environment

Electromagnetic Compatibility	Electrical fast transient/burst immunity test - test level: level 4 conforming to IEC 61000-4-4						
	Electrostatic discharge immunity test - test level: level 3 conforming to IEC 61000-4-2 Immunity to conducted disturbances - test level: level 3 conforming to IEC 61000-4-6 Radiated radio-frequency electromagnetic field immunity test - test level: level 3 conforming to IEC 61000-4-3 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11 Surge immunity test - test level: level 3 conforming to IEC 61000-4-5						
Standards	IEC 61800-5-1 IEC 61800-3						
Product Certifications	CE EAC KC						
Ip Degree Of Protection	IP20 without blanking plate on upper part IP4X top						
Pollution Degree	2 conforming to IEC 61800-5-1						
Environmental Characteristic	Dust pollution resistance class 3S2 conforming to IEC 60721-3-3 Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3						
Shock Resistance	15 gn conforming to IEC 60068-2-27 for 11 ms						
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3						
Ambient Air Temperature For Storage	-2570 °C						
Ambient Air Temperature For Operation	-1055 °C without derating 5560 °C protective cover from the top of the drive removed with current derating 2.2 % per °C						
Operating Altitude	<= 1000 m without derating						

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	21.2 cm
Package 1 Width	18.0 cm
Package 1 Length	33.0 cm
Package 1 Weight	10.7 kg
Unit Type Of Package 2	P06
Number Of Units In Package 2	6
Package 2 Height	105.0 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	80.2 kg



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Resource performance



Upgraded Components Available

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

ATV310HD22N4EF

Dimensions Drawings

Dimensions

Side and Front Sides

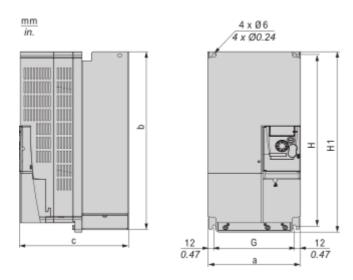

Dimensions in mm

а	b	С	G	Н	H1	Ø	For screws	
180	384.5	212	156	371.5	390	6	M5	

Dimensions in in.


а	b	С	G	Н	H1	Ø	For screws
7.09	15.14	8.35	6.14	14.63	15.35	0.23	M5

ATV310HD22N4EF

Mounting and Clearance


Mounting Recommendations

Clearance




Mounting Types

Mounting Type A




Mounting Type B



Remove the protective cover from the top of the drive.

Connections and Schema

Three-Phase Power Supply Wiring Diagram

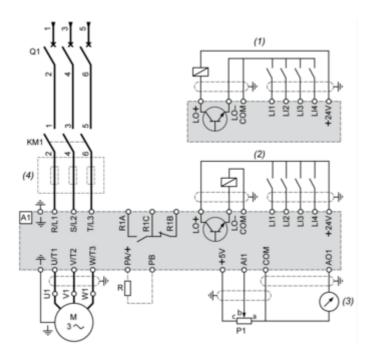

A1: Drive

KM1 : Contactor (only if a control circuit is needed)

P1: 2.2 kΩ reference potentiometer. This can be replaced by a 10 kΩ potentiometer (maximum).

Q1 : Circuit breaker

R: Braking resistor (optional)

(1) Negative logic (Sink)

(2) Positive logic (Source) (factory set configuration)

(3) 0...10 V or 0...20 mA

(4) Line choke three-phase (optional)