Product datasheet

Specification





variable speed drive, Altivar Process ATV600, ATV630, 22kW, 30hp, 200 to 240V, IP21, UL type 1

ATV630D22M3

Main

Mani	
Range Of Product	Altivar Process ATV600
Product Or Component Type	Variable speed drive
Product Specific Application	Process and utilities
Device Short Name	ATV630
Variant	Standard version
Product Destination	Asynchronous motors Synchronous motors
Emc Filter	Without EMC filter
Ip Degree Of Protection	IP21 conforming to IEC 61800-5-1 IP21 conforming to IEC 60529
[Us] Rated Supply Voltage	200240 V
Degree Of Protection	UL type 1 conforming to UL 508C
Type Of Cooling	Forced convection
Supply Frequency	5060 Hz - 55 %
[Us] Rated Supply Voltage	200240 V - 1510 %
Motor Power Kw	22 kW (normal duty) 18.5 kW (heavy duty)
Motor Power Hp	30 hp normal duty 25 hp heavy duty
Line Current	76 A at 200 V (normal duty) 64.3 A at 240 V (normal duty) 64.8 A at 200 V (heavy duty) 54.5 A at 240 V (heavy duty)
Prospective Line Isc	50 kA
Apparent Power	26.7 kVA at 240 V (normal duty) 22.7 kVA at 240 V (heavy duty)
Continuous Output Current	92.6 A at 4 kHz for normal duty 78.4 A at 4 kHz for heavy duty
Asynchronous Motor Control Profile	Variable torque standard Constant torque standard Optimized torque mode
Synchronous Motor Control Profile	Permanent magnet motor Synchronous reluctance motor
Speed Drive Output Frequency	0.1500 Hz
Nominal Switching Frequency	4 kHz
Switching Frequency	212 kHz adjustable 412 kHz with derating factor

Safety Function	STO (safe torque off) SIL 3
Discrete Input Logic	16 preset speeds
Communication Port Protocol	Modbus TCP Ethernet Modbus serial
Option Card	Slot A: communication module, Profibus DP V1 Slot A: communication module, PROFINET Slot A: communication module, DeviceNet Slot A: communication module, Modbus TCP/EtherNet/IP Slot A: communication module, CANopen daisy chain RJ45 Slot A: communication module, CANopen SUB-D 9 Slot A: communication module, CANopen screw terminals Slot A: slot B: digital and analog I/O extension module Slot A/slot B: output relay extension module Slot A: communication module, Ethernet IP/Modbus TCP/MD-Link Communication module, BACnet MS/TP Communication module, Ethernet Powerlink

Complementary

· · · · · · · · · · · · · · · · · ·	
Mounting Mode	Wall mount
Maximum Transient Current	101.9 A during 60 s (normal duty) 117.6 A during 60 s (heavy duty)
Network Number Of Phases	3 phases
Discrete Output Number	0
Discrete Output Type	Relay outputs R1A, R1B, R1C 250 V AC 3000 mA Relay outputs R1A, R1B, R1C 30 V DC 3000 mA Relay outputs R2A, R2C 250 V AC 5000 mA Relay outputs R2A, R2C 30 V DC 5000 mA Relay outputs R3A, R3C 250 V AC 5000 mA Relay outputs R3A, R3C 30 V DC 5000 mA Relay outputs R3A, R3C 30 V DC 5000 mA
Output Voltage	<= power supply voltage
Permissible Temporary Current Boost	1.1 x In during 60 s (normal duty) 1.5 x In during 60 s (heavy duty)
Motor Slip Compensation	Adjustable Automatic whatever the load Not available in permanent magnet motor law Can be suppressed
Acceleration And Deceleration Ramps	Linear adjustable separately from 0.019999 s
Physical Interface	Ethernet 2-wire RS 485
Braking To Standstill	By DC injection
Protection Type	Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive
Transmission Rate	10, 100 Mbits 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps
Frequency Resolution	Display unit: 0.1 Hz Analog input: 0.012/50 Hz

Transmission Frame	RTU	
Electrical Connection	Control: removable screw terminals 0.51.5 mm²/AWG 20AWG 16 Line side: screw terminal 3550 mm²/AWG 2AWG 1 Motor: screw terminal 50 mm²/AWG 1	
Connector Type	RJ45 (on the remote graphic terminal) for Ethernet/Modbus TCP RJ45 (on the remote graphic terminal) for Modbus serial	
Data Format	8 bits, configurable odd, even or no parity	
Type Of Polarization	No impedance	
Exchange Mode	Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP	
Number Of Addresses	1247 for Modbus serial	
Method Of Access	Slave Modbus TCP	
Supply	External supply for digital inputs: 24 V DC (1930 V), <1.25 mA, protection type: overload and short-circuit protection Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection Internal supply for digital inputs and STO: 24 V DC (2127 V), <200 mA, protection type: overload and short-circuit protection	
Local Signalling	3 LEDs for local diagnostic 3 LEDs (dual colour) for embedded communication status 4 LEDs (dual colour) for communication module status 1 LED (red) for presence of voltage	
Width	226 mm	
Height	673 mm	
Depth	271 mm	
Net Weight	14.3 kg	
Analogue Input Number	3	
Analogue Input Type	Al1, Al2, Al3 software-configurable voltage: 010 V DC, impedance: 31.5 kOhm, resolution 12 bits Al1, Al2, Al3 software-configurable current: 020 mA, impedance: 250 Ohm, resolution 12 bits Al2 voltage analog input: - 1010 V DC, impedance: 31.5 kOhm, resolution 12 bits	
Discrete Input Number	8	
Discrete Input Type	DI7, DI8 programmable as pulse input: 030 kHz, 24 V DC (<= 30 V)	
Input Compatibility	DI1DI6: discrete input level 1 PLC conforming to IEC 61131-2 DI5, DI6: discrete input level 1 PLC conforming to IEC 65A-68 STOA, STOB: discrete input level 1 PLC conforming to IEC 61131-2	
Discrete Input Logic	Positive logic (source) (DI1DI8), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (DI1DI8), > 16 V (state 0), < 10 V (state 1)	
Analogue Output Number	2	
Analogue Output Type	Software-configurable voltage AQ1, AQ2: 010 V DC impedance 470 Ohm, resolution 10 bits Software-configurable current AQ1, AQ2: 020 mA, resolution 10 bits Software-configurable current DQ-, DQ+: 30 V DC Software-configurable current DQ-, DQ+: 100 mA	
Sampling Duration	2 ms +/- 0.5 ms (DI1DI4) - discrete input 5 ms +/- 1 ms (DI5, DI6) - discrete input 5 ms +/- 0.1 ms (AI1, AI2, AI3) - analog input 10 ms +/- 1 ms (AO1) - analog output	
Accuracy	+/- 0.6 % Al1, Al2, Al3 for a temperature variation 60 °C analog input +/- 1 % AO1, AO2 for a temperature variation 60 °C analog output	
Linearity Error	Al1, Al2, Al3: +/- 0.15 % of maximum value for analog input AO1, AO2: +/- 0.2 % for analog output	
Relay Output Number	3	

ectrical durability 100000 cycles
electrical durability 100000 cycles
electrical durability 100000 cycles
i = 1: 3 A at 250 V AC
i = 1: 3 A at 30 V DC
ni = 0.4 and L/R = 7 ms: 2 A at 250
-: 0.4 1./D . 7 0.4 - t 00.
ni = 0.4 and L/R = 7 ms: 2 A at 30 V
np
(ESP)

Insulation Resistance	> 1 MOhm 500 V DC for 1 minute to earth	
Noise Level	63.5 dB conforming to 86/188/EEC	
Power Dissipation In W	Natural convection: 107 W at 200 V, switching frequency 4 kHz Forced convection: 707 W at 200 V, switching frequency 4 kHz	
Volume Of Cooling Air	240 m3/h	
Operating Position	Vertical +/- 10 degree	
Maximum Thdi	<48 % from 80100 % of load conforming to IEC 61000-3-12	
Electromagnetic Compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6	
Pollution Degree	2 conforming to IEC 61800-5-1	
Vibration Resistance	1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6 1 gn (f= 13200 Hz) conforming to IEC 60068-2-6	

Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3
Ambient Air Temperature For Operation	-1550 °C (without derating) 5060 °C (with derating factor)
Ambient Air Temperature For Storage	-4070 °C
Operating Altitude	<= 1000 m without derating 10004800 m with current derating 1 % per 100 m
Product Certifications	DNV-GL ATEX zone 2/22 CSA TÜV UL ATEX INERIS
Marking	CE
Standards	UL 508C IEC 61800-3 IEC 61800-3 environment 1 category C2 EN/IEC 61800-3 environment 2 category C3 IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1
Overvoltage Category	III
Regulation Loop	Adjustable PID regulator
Noise Level	63.5 dB
Pollution Degree	2

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	54.0 cm
Package 1 Width	35.0 cm
Package 1 Length	81.0 cm
Package 1 Weight	28.0 kg

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Resource performance



Upgraded Components Available

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

Dimensions Drawings

Dimensions

Drives with IP21 Top Cover


Front, Left and Rear Views




mm





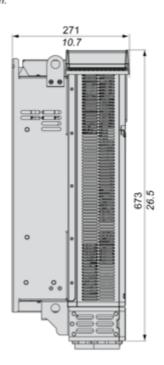

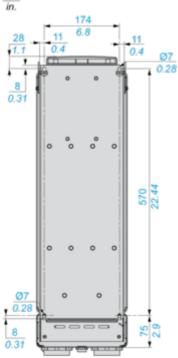

Drives Without IP21 Top CoverLeft and Rear Views


Product datasheet

ATV630D22M3

mm in.




mm in.

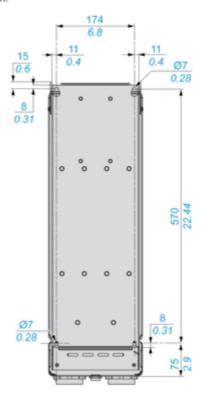

Mounting and Clearance


Clearances

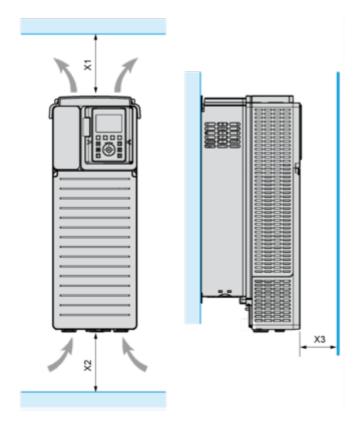

X1	X2	X3
≥ 100 mm (3.94 in.)	≥ 100 mm (3.94 in.)	≥ 10 mm (0.39 in.)


Mounting Types

Mounting Type A: Individual IP21

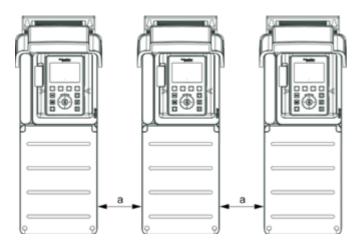


a ≥ = 110 mm (4.33 in.)

Mounting Type B: Side by Side IP20 (Possible, 2 Drives Only)



Mounting Type C: Individual IP20

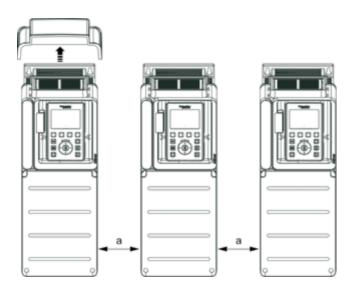


a ≥ = 110 mm (4.33 in.)

Connections and Schema

Three-Phase Power Supply with Upstream Breaking via Line Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

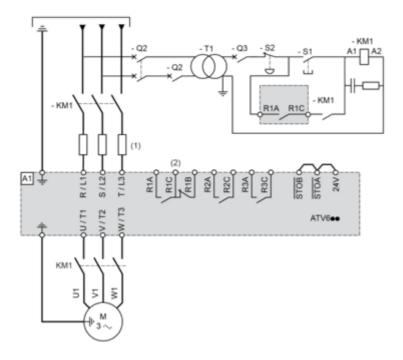

(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.


A1 : Drive

KM1 : Line Contactor Q2, Q3 : Circuit breakers S1, S2 : Pushbuttons

T1: Transformer for control part

Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

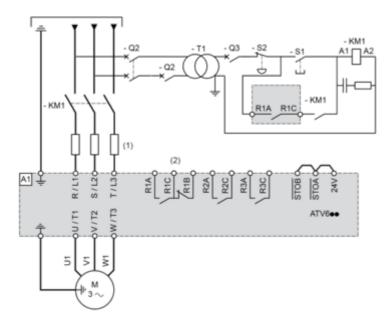


(1) Line choke if used

(2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.

A1 : Drive KM1 : Contactor

Control Block Wiring Diagram

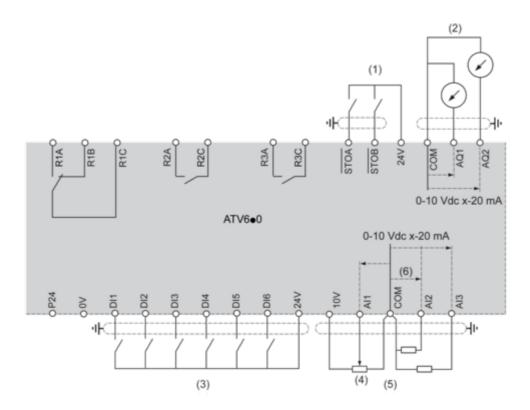


- (1) Safe Torque Off
- (2) Analog Output
- (3) Digital Input
- (4) Reference potentiometer
- (5) Analog Input

R1A, R1B, R1C : Fault relay R2A, R2C : Sequence relay R3A, R3C : Sequence relay

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals Al2 or Al3.




Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs




Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs



Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs




Switch Set to EXT Position Using an External Power Supply for the DIs



Performance Curves

Derating Curves

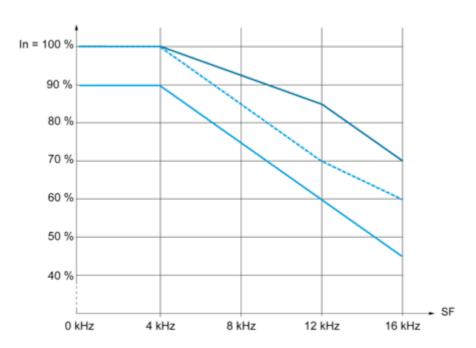

40 °C (104 °F) - Mounting type A, B and C 50 °C (122 °F) - Mounting type A, B and C 60 °C (140 °F) - Mounting type B and C

In: Nominal Drive Current SF: Switching Frequency