

Lista sa podacima o proizvodima

Specifikacije



žuta udubljena glava tastera Ø22
sa povratkom bez oznake

ZB4BP5S

Cena* bez PDV-a: 1.046,53 RSD

Osnovne informacije

Grupa Proizvoda	Harmony XB4
Tip Proizvoda Ili Komponente	Glava za nesvetleći taster
Kratko Ime Uređaja	ZB4
Kompatibilnost Proizvoda	nosač oznake
Materijal Podnožja	Hromirani metal
Prečnik Za Montiranje	22,5 mm
Prodaja Po Nedeljivim Količinama	1
Tip Glave	Standardni
Oblik Glave Signalne Jedinice	Okrugla
Tip Glave Uređaja	sa povratkom
Profil Glave Uređaja	Žuta udubljena, neoznačeno
Dodatne Informacije O Glavi Uređaja	Navlaka u boji
Boja Kapica/Glave Ili Sočiva	Žuta

Dopunske informacije

Cad Ukupna Širina	30 mm
Cad Ukupna Visina	30 mm
Cad Ukupna Dubina	33 mm
Mehanička Trajnost	10000000 ciklusa
Kod	C1 za <9 kontakti koristeći jednostruke blokove u prednja ugradnja C2 za <9 kontakti koristeći jednostruke i dvostruke blokove u prednja ugradnja C11 za <3 kontakti koristeći jednostruke blokove u prednja ugradnja C15 za <1 kontakti koristeći jednostruke blokove u prednja ugradnja
Prezentacija Uređaja	Osnovni element

Okruženje

Tretman Zaštite	TH
Temperatura Okoline Za Skladištenje	-40...70 °C
Temperatura Okoline Za Rad Uređaja	-40...70 °C
Kategorija Prenapona	Klasa I u skladu sa IEC 60536
Ip Stepen Zaštite	IP66 u skladu sa IEC 60529 IP67 IP69 IP69K

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Odricanje odgovornosti: Ova dokumentacija nije namenjena kao zamena i ne treba je koristiti za utvrđivanje podobnosti ili pouzdanosti ovih proizvoda za određene namene

Nema Stepen Zaštite	NEMA 13 NEMA 4X
Ik Stepen Zaštite	IK06 conforming to IEC 50102
Standardi	IEC 60947-5-5 CSA C22.2 No 14 UL 508 IEC 60947-5-1 IEC 60947-1 IEC 60947-5-4 JIS C8201-5-1 JIS C8201-1
Sertifikacija Proizvoda	DNV BV GL LROS (Lloyds register of shipping) UL odobrenje CSA
Otpornost Na Vibracije	5 gn (f= 2...500 Hz) u skladu sa IEC 60068-2-6
Otpornost Na Udare	30 gn (trajanje = 18 milisekundi) za ubrzanje polovine sinusne periode u skladu sa IEC 60068-2-27 50 gn (trajanje = 11 milisekundi) za ubrzanje polovine sinusne periode u skladu sa IEC 60068-2-27

Pakovanje

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3,600 cm
Package 1 Width	4,800 cm
Package 1 Length	5,400 cm
Package 1 Weight	28,600 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	50
Package 2 Height	15,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	1,754 kg

Ugovorna garancija

Garancija	18 meseci
-----------	-----------

Održivost

Oznaka **Green Premium™** je posvećenost kompanije Schneider Electric isporuci proizvoda sa ekološkim performansama najboljim u klasi. Green Premium obećava usaglašenost sa najnovijim propisima, transparentnost u pogledu uticaja na životnu sredinu, kao i sa cirkularnim i niskonaponskim CO₂ proizvodima.

Vodič za procenu održivosti proizvoda je bela knjiga koja razjašnjava globalne standarde za oznaku ekološke prihvatljivosti i način tumačenja ekoloških izjava.

[Saznajte više o oznaci Green Premium >](#)

[Vodič za procenu održivosti proizvoda >](#)



Prozirnost



RoHS/REACH

Performanse dobrobiti

- ✓

Reach Bez Svhc
- ✓

Bez Toksičnih Teških Metala
- ✓

Bez Žive
- ✓


Informacije O Rohs Izuzecima

Da

Sertifikacija i standardi

Propis Reach	REACH deklaracija
Eu Rohs Direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS) EU RoHS deklaracija
Rohs Regulativa Za Kinu	RoHS deklaracija za Kinu
Izjava O Zaštiti Okoliša	Profil ekološke prihvatljivosti proizvoda
Profil Cirkularnosti	Informacije o kraju radnog veka



Dimensions

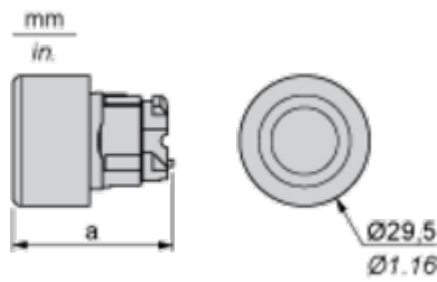

	a in mm	a in in.
ZB4BP••	36.5	1.44
ZB4BP•S	33	1.30
ZB4BP•83	32	1.26
ZB4BP•	35	1.38


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

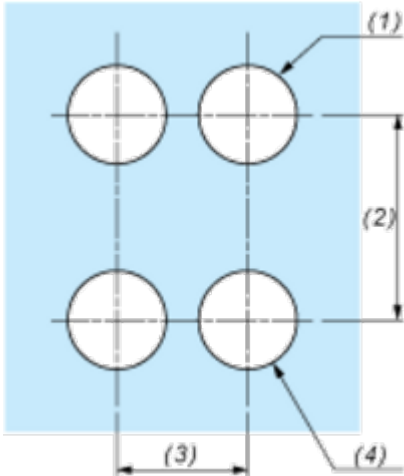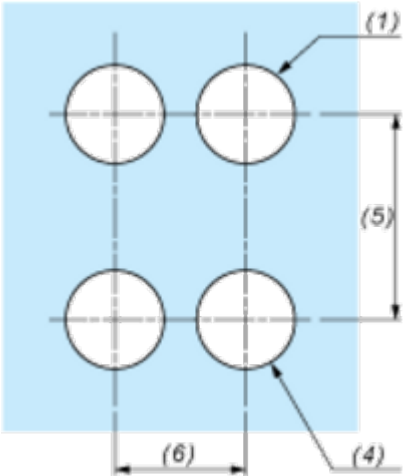Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board	Connection by Faston Connectors
	
(1) Diameter on finished panel or support (2) 40 mm min. / 1.57 in. min. (3) 30 mm min. / 1.18 in. min. (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $^{+0.4}_0$ / 0.88 in. $^{+0.016}_0$) (5) 45 mm min. / 1.78 in. min. (6) 32 mm min. / 1.26 in. min.	

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer’s Side)

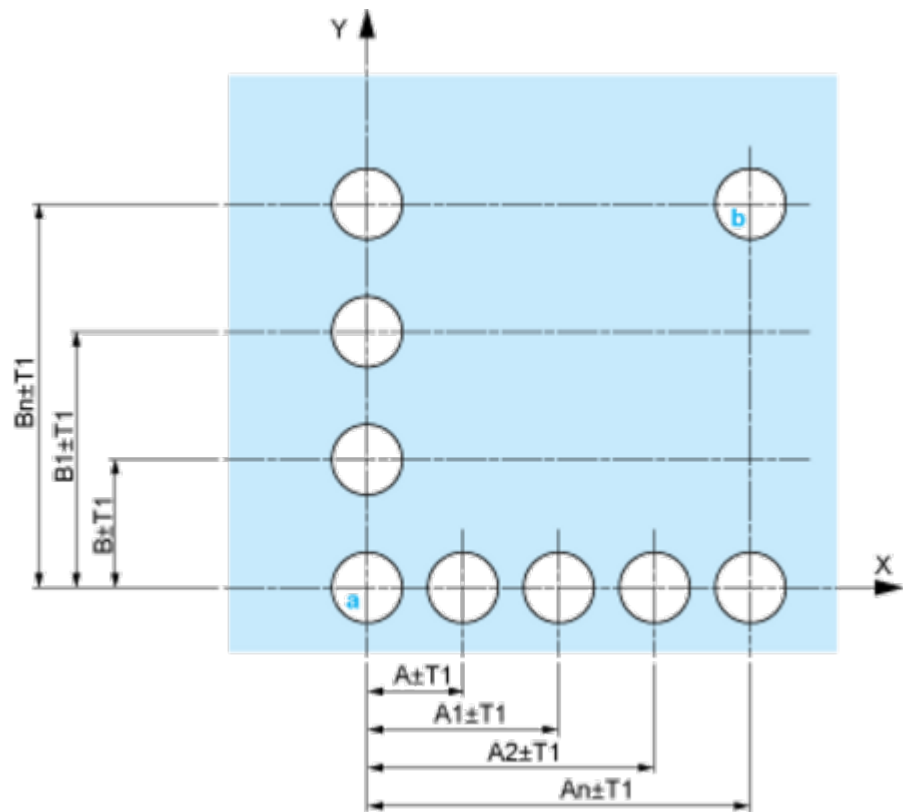


A: 30 mm min. / 1.18 in. min.


B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

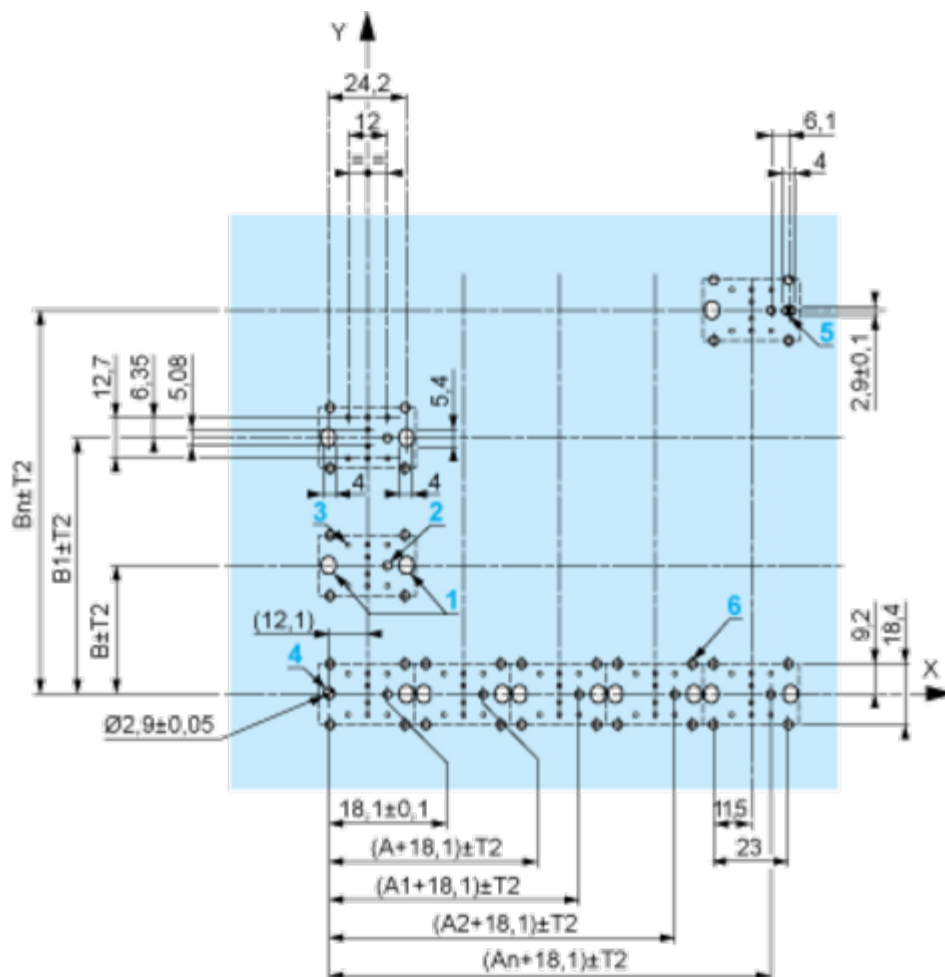

A: 30 mm min.
B: 40 mm min.
 Dimensions in in.

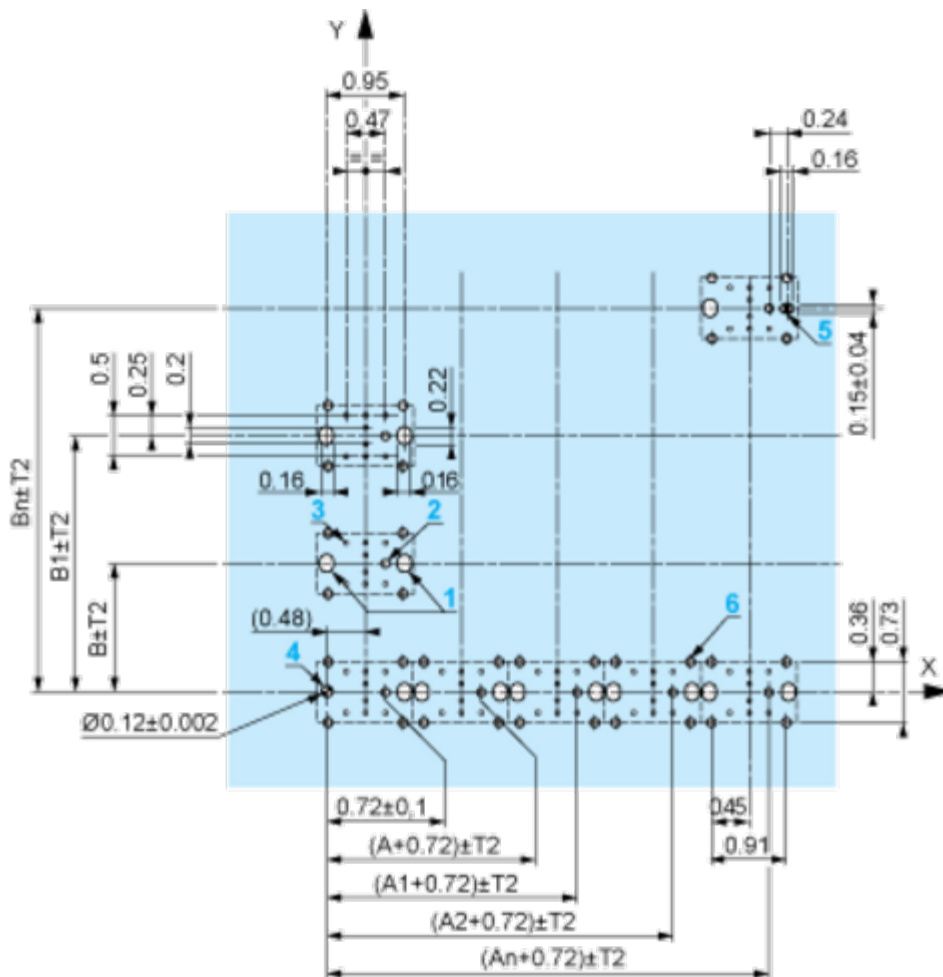

A: 1.18 in. min.

B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: $T1 + T2 = 0.3 \text{ mm max.}$

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2° 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB4 BD*, ZB4 BJ*, ZB4 BG*).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

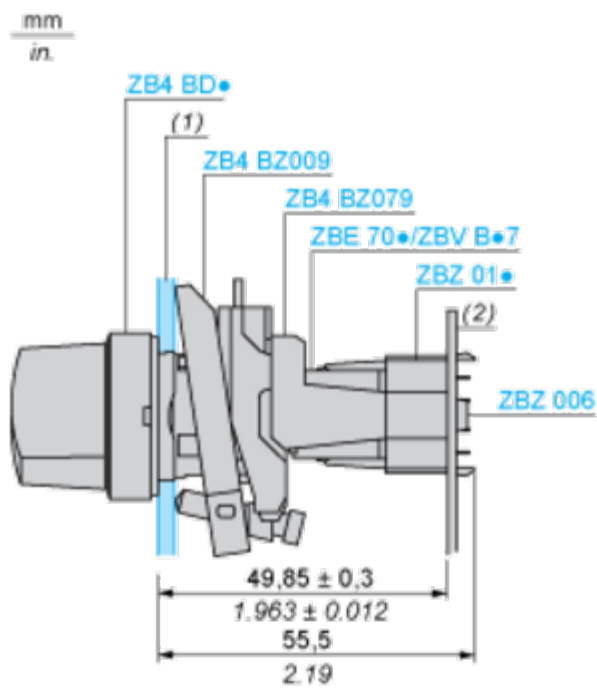

- (1) Panel
(2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ for centring adapter ZBZ 01•
- 3 $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$ holes
- 4 1 hole $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$ for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ holes for centring adapter ZBZ 01•.

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location

