Specifications





variable speed drive ATV61 -310kW - 690V - without EMC filter

ATV61HC31Y

- () Discontinued on: Jul 23, 2021 AD
- () To be end-of-service on: Dec 31, 2028 AD

① To be discontinued

Main

Mann	
Range Of Product	Altivar 61
Product Or Component Type	Variable speed drive
Product Specific Application	Pumping and ventilation machine
Component Name	ATV61
Motor Power Kw	250 kW, 3 phases at 500 V 315 kW, 3 phases at 690 V
Motor Power Hp	350 hp, 3 phases at 575 V
Power Supply Voltage	500690 V - 1510 %
Supply Number Of Phases	3 phases
Line Current	311 A for 600 V 3 phases 250 kW / 350 hp 317 A for 690 V 3 phases 250 kW / 350 hp 342 A for 500 V 3 phases 250 kW / 350 hp
Emc Filter	Level 3 EMC filter
Assembly Style	With heat sink
Maximum Prospective Line Isc	35 kA for 3 phases
Maximum Transient Current	468 A for 60 s, 3 phases
Nominal Switching Frequency	2.5 kHz
Switching Frequency	2.54.9 kHz adjustable 2.54.9 kHz with derating factor
Asynchronous Motor Control	Voltage/frequency ratio, 5 points Voltage/frequency ratio, 2 points Voltage/frequency ratio - Energy Saving, quadratic U/f Flux vector control without sensor, standard
Synchronous Motor Control Profile	Vector control without sensor, standard
Communication Port Protocol	CANopen Modbus
Type Of Polarization	No impedance for Modbus

Type Of Polarization

No impedance for Modbus

Option Card

Communication card for APOGEE FLN
Communication card for BACnet
Communication card for CC-Link
Controller inside programmable card
Communication card for DeviceNet
Communication card for EtherNet/IP
Communication card for Fipio
I/O extension card
Communication card for Interbus-S
Communication card for LonWorks
Communication card for METASYS N2
Communication card for Modbus Plus
Communication card for Modbus TCP
Communication card for Modbus/Uni-Telway
Multi-pump card
Communication card for Profibus DP
Communication card for Profibus DP V1

Complementary

Product Destination	Asynchronous motors Synchronous motors
Power Supply Voltage Limits	425759 V
Power Supply Frequency	5060 Hz - 55 %
Power Supply Frequency Limits	47.563 Hz
Continuous Output Current	336 A at 2.5 kHz, 575 V - 3 phases 355 A at 2.5 kHz, 690 V - 3 phases 390 A at 2.5 kHz, 500 V - 3 phases
Output Frequency	0.1500 Hz
Speed Range	1100 in open-loop mode, without speed feedback
Speed Accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn without speed feedback
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback
Transient Overtorque	130 % of nominal motor torque +/- 10 % for 60 s
Braking Torque	<= 125 % with braking resistor 30 % without braking resistor
Regulation Loop	Frequency PI regulator
Motor Slip Compensation	Adjustable Can be suppressed Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points)
Diagnostic	1 LED (red) for drive voltage
Output Voltage	<= power supply voltage
Electrical Isolation	Between power and control terminals
Type Of Cable For Mounting In An Enclosure	With an IP21 or an IP31 kit: 3 wire(s)IEC cable at 40 °C, copper 70 °C / PVC With UL Type 1 kit: 3 wire(s)UL 508 cable at 40 °C, copper 75 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 70 °C / PVC Without mounting kit: 1 wire(s)IEC cable at 45 °C, copper 90 °C / XLPE/EPR
Electrical Connection	Terminal 2.5 mm² / AWG 14 (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) Terminal 4 x 185 mm² / 3 x 350 kcmil (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) Terminal 4 x 185 mm² / 3 x 350 kcmil (PC/-, PA/+)
Tightening Torque	0.6 N.m (Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) 41 N.m, 360 Ib.in (L1/R, L2/S, L3/T, U/T1, V/T2, W/T3) 41 N.m, 360 Ib.in (PC/-, PA/+)
Supply	Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC, +/- 5 %, <10 mA with overload and short-circuit protection Internal supply: 24 V DC (2127 V), <200 mA with overload and short-circuit protection External supply: 24 V DC (1930 V)

Analogue Input Number	2						
Analogue Input Type	Al1-/Al1+ bipolar differential voltage: +/- 10 V DC 24 V max, resolution 11 bits + sign Al2 software-configurable current: 020 mA, impedance: 242 Ohm, resolution 11 bits Al2 software-configurable voltage: 010 V DC 24 V max, impedance: 30000 Ohm, resolution 11 bits						
Sampling Time	2 ms +/- 0.5 ms (Al1-/Al1+) - analog input 2 ms +/- 0.5 ms (Al2) - analog input 2 ms +/- 0.5 ms (AO1) - analog output 2 ms +/- 0.5 ms (Ll1Ll5) - discrete input 2 ms +/- 0.5 ms (Ll6)if configured as logic input - discrete input						
Absolute Accuracy Precision	+/- 0.6 % (Al1-/Al1+) for a temperature variation 60 °C +/- 0.6 % (Al2) for a temperature variation 60 °C +/- 1 % (AO1) for a temperature variation 60 °C						
Linearity Error	+/- 0.15 % of maximum value (Al1-/Al1+) +/- 0.15 % of maximum value (Al2) +/- 0.2 % (AO1)						
Analogue Output Number	1						
Analogue Output Type	AO1 software-configurable current, analogue output range 020 mA, impedance: 500 Ohm, resolution 10 bits AO1 software-configurable voltage, analogue output range 010 V DC, impedance: 470 Ohm, resolution 10 bits AO1 software-configurable logic output 10 V, 20 mA						
Discrete Output Number	2						
Discrete Output Type	Configurable relay logic: (R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic: (R2A, R2B) NO - 100000 cycles						
Maximum Response Time	<= 100 ms in STO (Safe Torque Off) R1A, R1B, R1C <= 7 ms, tolerance +/- 0.5 ms R2A, R2B <= 7 ms, tolerance +/- 0.5 ms						
Minimum Switching Current	3 mA at 24 V DC for configurable relay logic						
Maximum Switching Current	R1, R2: 2 A at 250 V AC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 2 A at 30 V DC inductive load, cos phi = 0.4 and L/R = 7 ms R1, R2: 5 A at 250 V AC resistive load, cos phi = 1 and L/R = 0 ms R1, R2: 5 A at 30 V DC resistive load, cos phi = 1 and L/R = 0 ms						
Discrete Input Number	7						
Discrete Input Type	Programmable (LI1LI5)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable (LI6)24 V DC (<= 30 V), with level 1 PLC - 3500 Ohm Switch-configurable PTC probe (LI6)06 probes - 1500 Ohm Safety input (PWR)24 V DC (<= 30 V) - 1500 Ohm						
Discrete Input Logic	Negative logic (sink) (LI1LI5), > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI1LI5), < 5 V (state 0), > 11 V (state 1) Negative logic (sink) (LI6)if configured as logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source) (LI6)if configured as logic input, < 5 V (state 0), > 11 V (state 1)						
Acceleration And Deceleration Ramps	S, U or customized Automatic adaptation of ramp if braking capacity exceeded, by using resistor Linear adjustable separately from 0.01 to 9000 s						
Braking To Standstill	By DC injection						
Protection Type	Against exceeding limit speed: drive Against input phase loss: drive Break on the control circuit: drive Input phase breaks: drive Line supply overvoltage: drive Overcurrent between output phases and earth: drive Overheating protection: drive Overvoltages on the DC bus: drive Power removal: drive Short-circuit between motor phases: drive Thermal protection: drive Motor phase break: motor Power removal: motor Thermal protection: motor						

Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth
Frequency Resolution	Analog input: 0.024/50 Hz Display unit: 0.1 Hz
Connector Type	1 RJ45 (on front face) for Modbus 1 RJ45 (on terminal) for Modbus Male SUB-D 9 on RJ45 for CANopen
Physical Interface	2-wire RS 485 for Modbus
Transmission Frame	RTU for Modbus
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus on terminal 9600 bps, 19200 bps for Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
Data Format	8 bits, 1 stop, even parity for Modbus on front face 8 bits, odd even or no configurable parity for Modbus on terminal
Number Of Addresses	1127 for CANopen 1247 for Modbus
Method Of Access	Slave CANopen
Marking	CE
Operating Position	Vertical +/- 10 degree
Net Weight	181 kg
Width	595 mm
Height	1190 mm
Depth	377 mm

Environment

Noise Level	77 dB conforming to 86/188/EEC
Dielectric Strength	3110 V DC between earth and power terminals
	5345 V DC between control and power terminals
Electromagnetic Compatibility	Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6
	Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4
	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2
	Radiated radio-frequency electromagnetic field immunity test level 3 conforming to
	IEC 61000-4-3
	Voltage dips and interruptions immunity test conforming to IEC 61000-4-11
Standards	EN 61800-3 environments 2 category C3
	EN 61800-3 environments 1 category C3
	EN 55011 class A group 2
	UL Type 1
	EN/IEC 61800-5-1
	IEC 60721-3-3 class 3C2
	EN/IEC 61800-3
Product Certifications	NOM 117
	CSA
	UL
	GOST
	C-Tick
	DNV
Pollution Degree	3 conforming to EN/IEC 61800-5-1
	3 conforming to UL 840
Degree Of Proctection	IP41 on upper part conforming to EN/IEC 60529
	IP41 on upper part conforming to EN/IEC 61800-5-1
	IP54 on lower part conforming to EN/IEC 60529
	IP54 on lower part conforming to EN/IEC 61800-5-1
	IP00 conforming to EN/IEC 60529
	IP00 conforming to EN/IEC 61800-5-1
	IP30 on side parts conforming to EN/IEC 60529
	IP30 on side parts conforming to EN/IEC 61800-5-1
	IP30 on the front panel conforming to EN/IEC 60529
	IP30 on the front panel conforming to EN/IEC 61800-5-1

Vibration Resistance	0.6 gn (f= 10…200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f= 3…10 Hz) conforming to EN/IEC 60068-2-6				
Shock Resistance	4 gn for 11 ms conforming to EN/IEC 60068-2-27				
Relative Humidity	595 % without condensation conforming to IEC 60068-2-3 595 % without dripping water conforming to IEC 60068-2-3				
Ambient Air Temperature For Operation	-1045 °C (without derating) 4560 °C (with derating factor)				
Ambient Air Temperature For Storage	-2570 °C				
Operating Altitude	<= 1000 m without derating 10002260 m with current derating 1 % per 100 m				

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	54.0 cm
Package 1 Width	43.0 cm
Package 1 Length	123.0 cm
Package 1 Weight	180.0 kg
Unit Type Of Package 2	S06
Number Of Units In Package 2	1
Package 2 Height	73.5 cm
Package 2 Width	60.0 cm
Package 2 Length	80.0 cm
Package 2 Weight	180.0 kg

Contractual warranty

Warranty

18 months

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration		
China Rohs Regulation	China RoHS declaration		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		

Dimensions Drawings

UL Type 1/IP 20 Drives

Dimensions with or without 1 Option Card (1)

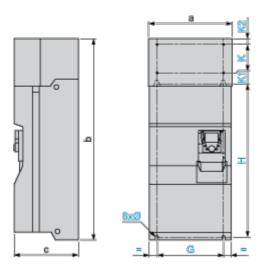

Dimensions in mm


а	b	с	G	Н	K	K1	K2	Ø
595	1190	377	540	920	150	75	30	11.5

Dimensions in in.

а	b	с	G	Н	К	K1	K2	Ø
23.43	46.85	14.84	21.26	36.22	5.90	2.95	1.18	0.45

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Dimensions with 2 Option Cards (1)

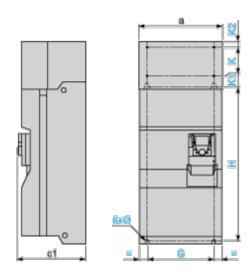

Dimensions in mm

а	c1	G	Н	Κ	K1	K2	Ø
595	392	540	920	150	75	30	11.5

Dimensions in in.


ATV61HC31Y

а	c1	G	Н	К	K1	K2	Ø
23.43	15.43	21.26	36.22	5.90	2.95	1.18	0.45

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.


Drive with Braking Unit VW3A7101

Dimensions with or without 1 Option Card (1)

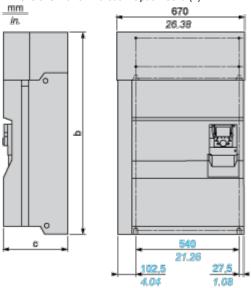

b in mm	c in mm	b in in.	c in in.
1190	377	46.85	14.84


(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card. Dimensions with 2 Option Cards (1)

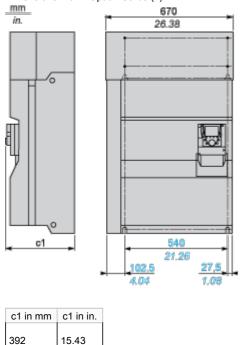

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.


Mounting and Clearance

Mounting Recommendations

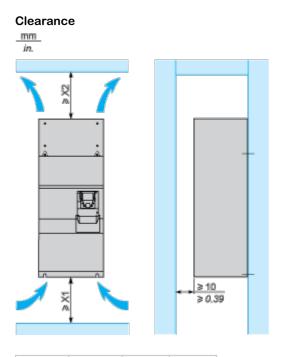

X1 in mm	X2 in mm	X1 in in.	X2 in in.
150	200	5.91	7.87

These drives can be mounted side by side, observing the following mounting recommendations:

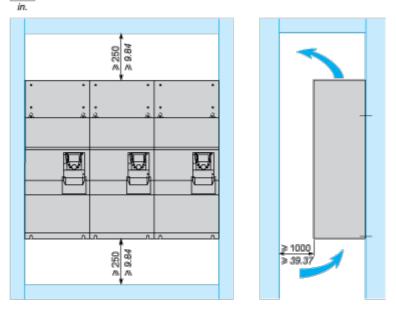


ATV61HC31Y

Specific Recommendations for Mounting the Drive in an Enclosure

Ventilation

To ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.


Dust and Damp Proof Metal Enclosure (IP 54)

The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc. This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Upstream Breaking via Contactor

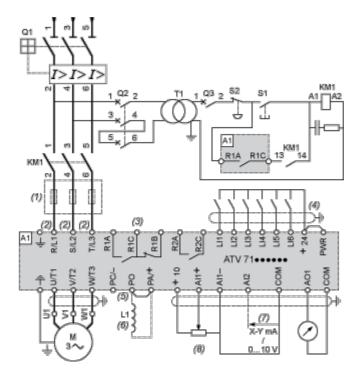

A1 ATV61 drive

- L1 DC choke
- Q1 Circuit-breaker
- Q2 GV2 L rated at twice the nominal primary current of T1
- Q3 GB2CB05

S1, S2 XB4 B or XB5 A pushbuttons

T1 100 VA transformer 220 V secondary

(1) Line choke (three-phase); mandatory for ATV61HC11Y...HC80Y drives (except when a special transformer is used (12-pulse)).

(2) For ATV61HC50N4, ATV61HC63N4 and ATV61HC50Y...HC80Y drives, refer to the power terminal connections diagram.

(3) Fault relay contacts. Used for remote signalling of the drive status.

(4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(5) There is no PO terminal on ATV61HC11Y...HC80Y drives.

(6) Optional DC choke for ATV61H•••M3, ATV61HD11M3X...HD45M3X and ATV61H075N4...HD75N4 drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV61HD55M3X...HD90M3X, ATV61HD90N4...HC63N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it. For ATV61W•••N4 and ATV61W•••N4C drives, the DC choke is integrated.

(7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.

(8) Reference potentiometer.


KM1 Contactor

NOTE: All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

ATV61HC31Y

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Power Section for Single-Phase Power Supply

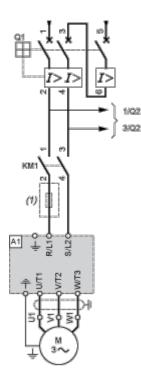

- A1 ATV61 drive
- KM1 Contactor
- Q1 Circuit-breaker
- Q2 GV2 L rated at twice the nominal primary current of T1


(1) Line Choke (single-phase); mandatory for ATV61HU40M3...HU75M3 drives with a 220...240 V 50/60 Hz single-phase power supply.

NOTE: All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature and the switching frequency. For intermediate temperatures (e.g. 55° C), interpolate between 2 curves.



X Switching frequency