

Produktdatablad

Specifikationer



Tryckknapp, Harmony XB5, plast, återfjädrande, plant trycke, hög frontring, blå

E-nummer:

3733849

ZB5AA64

! Utgått den: 1 okt. 2020

! Utgången

EAN-kod: 3389110134803

Produktdata

Produktområde	Harmony XB5
Typ Av Produkt Eller Komponent	Trycke för obelysta knappar
Enhetens Korta Namn	ZB5
Material Frontring	Mörkgrå plast
Montagediameter	22 mm
Typ Av Huvud	Standard
Försäljning Per Odelbar Kvantitet	1
Form På Signalenhetens Huvud	Rund
Typ Av Manöverdon	Återfjädring
Manöverdon Profil	Infälld blå, omärkt
Manöver Extra Information	Högt skydd

Teknisk data

Bredd	29 mm
Höjd	29 mm
Djup	31 mm
Produktens Vikt	0,02 kg
Mekanisk Livslängd	10000000 cycles
Stationsnamn	XALD 1...5 hål XALK 2...5 hål
Elektrisk Sammansättningskod	C1 för <9 kontakter använder singel block i frontmontage C2 för <9 kontakter använder singel och dubbel block i frontmontage C11 för <3 kontakter använder singel block i frontmontage C15 för <1 kontakter använder singel block i frontmontage SF1 för <3 kontakter använder singel block i frontmontage SR1 för <3 kontakter använder singel block i bakre montering
Produktbeskrivning	Produkt i alla delar

Miljö

Skyddsbehandling	TH
Omgivande Lufttemperatur För Lagring	-40...70 °C
Omgivningstemperatur Vid Drift	-40...70 °C
Överspänningskategori	Klass II överensstämmer med IEC 60536

Priset är angivet som indikativt listpris (exkl. moms) och kan komma att korrigeras med rabatt - kontrollera med din grossist eller återförsäljare för faktiskt pris.

Friskrivningsklausul: Denna dokumentation ska inte användas för att avgöra dessa produkters lämplighet eller pålitlighet för specifika kundapplikationer.

Ip-Kapslingsklass	IP66 överensstämmer med IEC 60529 IP67 IP69 IP69K
Nema Kapslingsklass	NEMA 13 NEMA 4X
Motstånd Mot Högtryckstvätt	7000000 Pa vid 55 °C, distans : 0.1 m
Ik-Skyddsgrad	IK03 conforming to IEC 50102
Produktcertifieringar	UL listad BV CSA LROS (Lloyds register of shipping) DNV GL
Chocktålighet	30 gn (varaktighet = 18 ms) för halv sinusacceleration överensstämmer med IEC 60068-2-27 50 gn (varaktighet = 11 ms) för halv sinusacceleration överensstämmer med IEC 60068-2-27
Vibrationsbeständighet	5 gn (f= 2...500 Hz) överensstämmer med IEC 60068-2-6

Förpackningsinformation

Förpackningstyp 1	PCE
Antal I Förpackning 1	1
Förpackning 1 Höjd	5,4 cm
Förpackning 1 Bredd	3,4 cm
Förpackning 1 Djup	4,4 cm
Förpackning 1 Vikt	20 g

Kontraktsgaranti

Garanti	18 months
---------	-----------

Hållbarhet

Green Premium™-märkningen är Schneider Electric's åtagande att leverera produkter med förstklassig miljöprestanda. Green Premium utlovar efterlevnad av de senaste bestämmelserna, insyn i miljöpåverkan samt cirkulära och koldioxidsnåla produkter.

Handbok för bedömning av produkthållbarhet är ett white paper som klargör globala miljömärkningsstandarder och hur man tolkar miljödeklarationer.

[Läs mer om Green Premium >](#)

[Riktlinjer för utvärdering av en produkts hållbarhet >](#)



Transparens RoHS/REACH

Välbefinnandeprestanda

✓

Innehåller Ej Reach Svhc-Ämnen

✓

Kvikksilverfri

✓

Rohs-Undantagsinformation


Ja

Certifieringar och standarder

Reach-Förordning	REACH-Deklaration
Eu Rohs-Direktiv	Proaktiv överensstämmelse (produkten utanför EU RoHS juridiska omfattning)
Rohs-Förordning Kina	RoHS-deklaration Kina
Miljöupplysning	Produktmiljöprofil
Cirkulationsprofil	Information om livslängdsslut

Dimensions Drawings


Dimensions

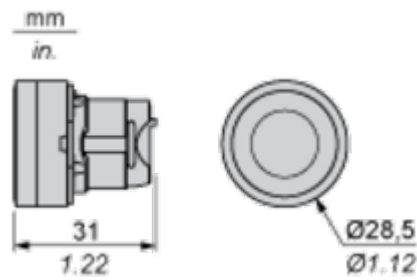

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

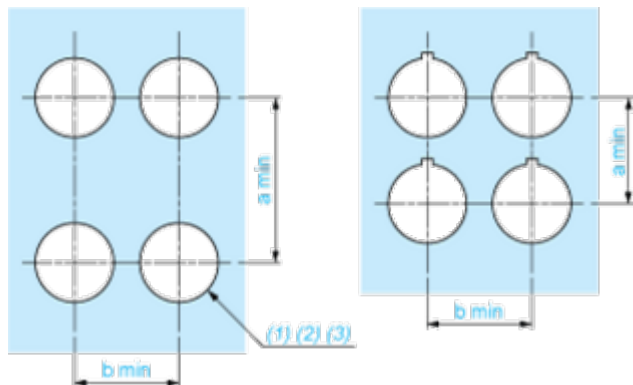

- (1) Diameter on finished panel or support
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
(3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in.} \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess

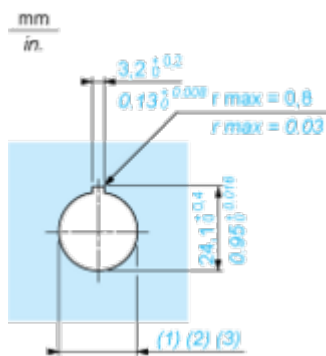

- (1) Diameter on finished panel or support
(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
(3) Ø22.5 mm recommended ($\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in.} \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

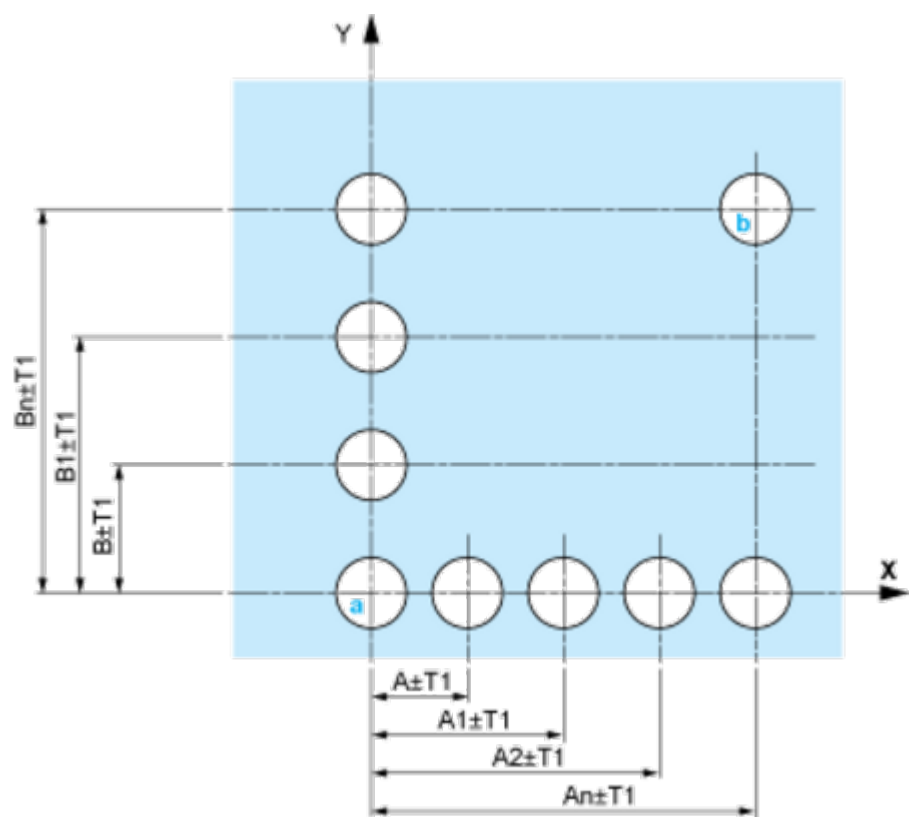

A: 30 mm min. / 1.18 in. min.
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

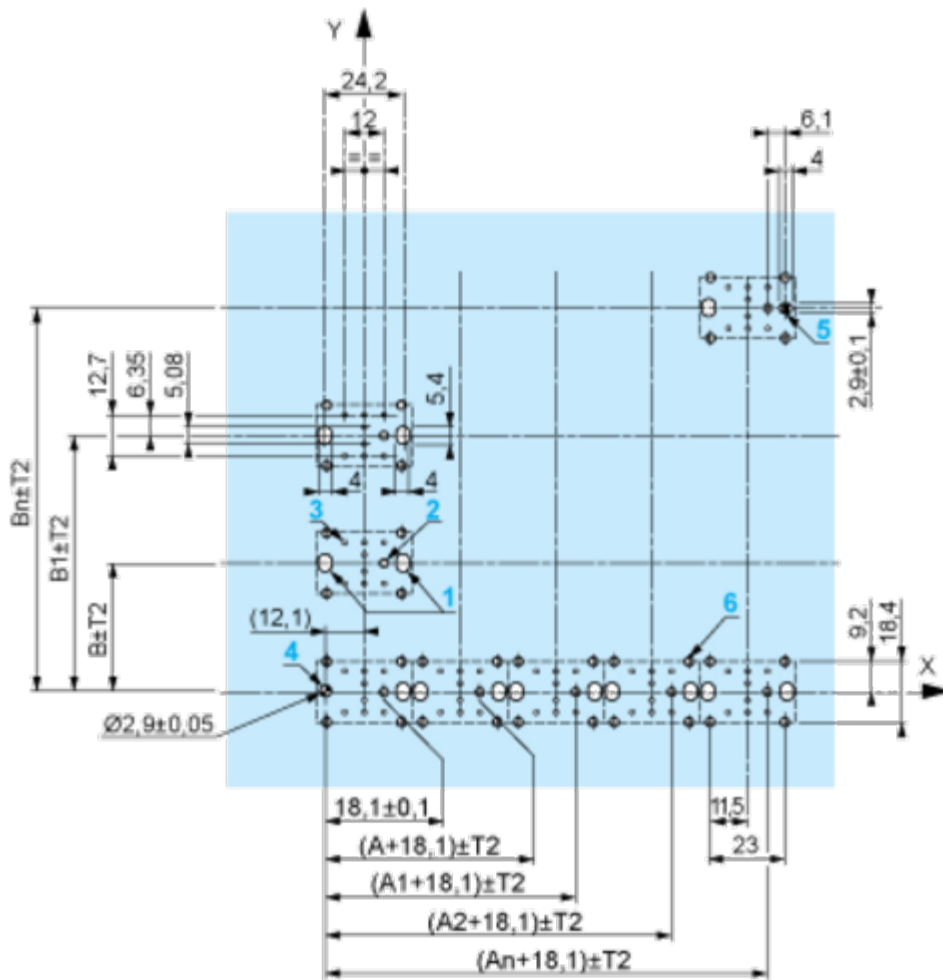

A: 30 mm min.

B: 40 mm min.

Dimensions in in.

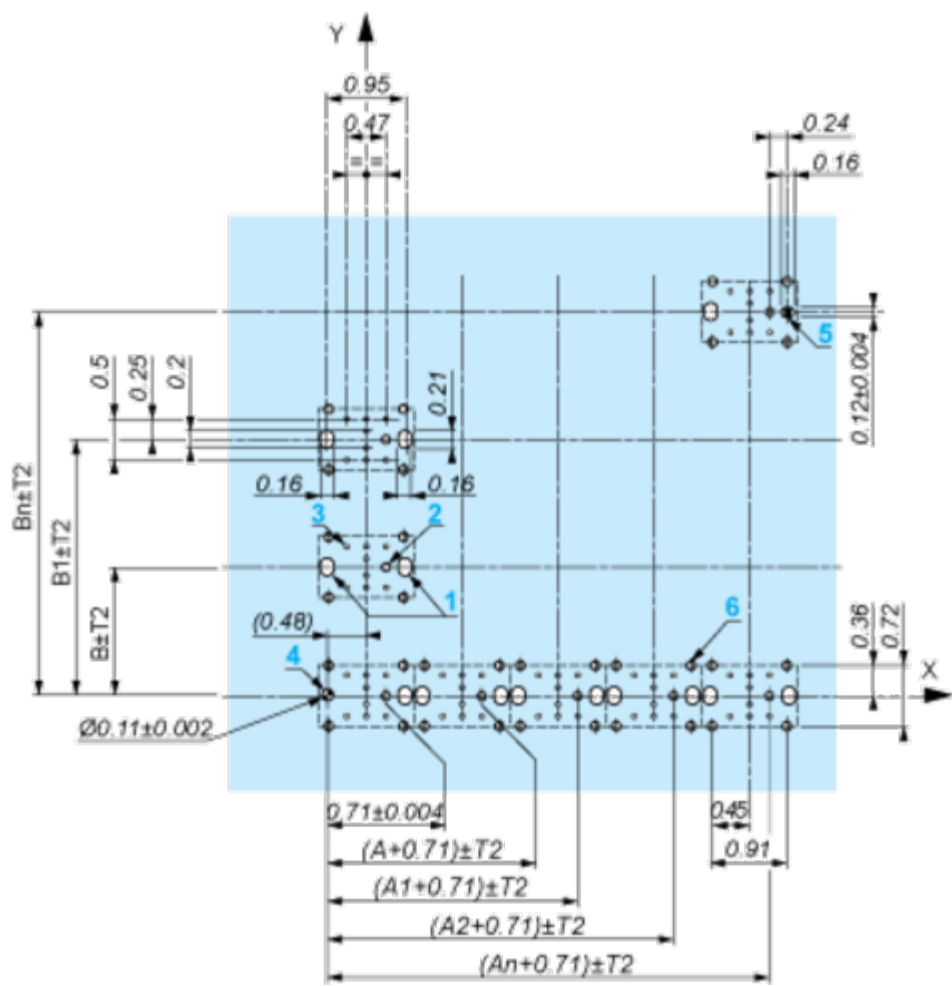

A: 1.18 in. min.
B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: $\pm 2^{\circ}30'$ (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

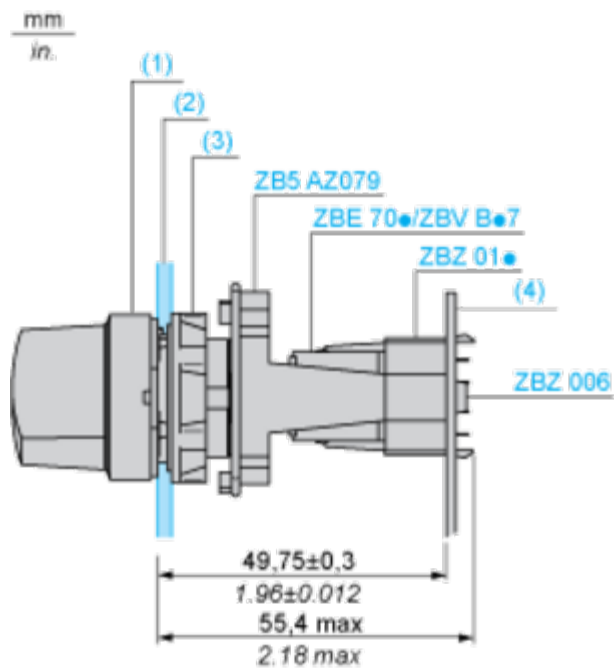

- (1) Head ZB5AD•
(2) Panel
(2) Nut
(4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ for centring adapter ZBZ01•
- 3 $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$ holes
- 4 1 hole $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$ for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Code C1



Electrical Composition Corresponding to Code C2




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1




Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location

